

# NFS-320 Intelligent Addressable Fire Alarm Control Panel

## General

The NFS-320 intelligent Fire Alarm Control Panel is part of the ONYX® Series of Fire Alarm Controls from NOTIFIER.

In stand-alone or network configurations, ONYX Series products meet virtually every application requirement.

The NFS-320's modular design makes system planning easier. The panel can be configured with just a few devices for small building applications, or networked with many devices to protect a large campus or a high-rise office block. Simply add additional peripheral equipment to suit the application. Wireless fire protection can be added with the SWIFT wireless gateway and devices.

For installations using NFS-320C, an optional ACM Series annunciator can be mounted in the same cabinet (up to 48 zones/points, order separately; see DN-60085).

**NOTE:** Unless called out with a version-specific "R", "C" or "E" at the end of the part number, "NFS-320" refers to models NFS-320, NFS-320R, NFS-320C, and NFS-320E.

## Features

- Certified for seismic applications when used with the appropriate seismic mounting kit.
- Approved for Marine applications when used with listed compatible equipment. See DN-60688.
- One isolated intelligent Signaling Line Circuit (SLC) Class A, B, or X.
- Up to 159 detectors and 159 modules per SLC; 318 devices maximum.
  - Detectors can be any mix of ion, photo, thermal, or multi-sensor; wireless detectors are available for use with the FWSG.
  - Modules include addressable pull stations, normally open contact devices, two-wire smoke detectors, notification, or relay; wireless modules are available for use with the FWSG.
- Optional FWSG Wireless SWIFT Gateway supports wireless SLC devices.
- Standard 80-character display.
- Network options:
  - High-speed network for up to 200 nodes (NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCD, NCA-2, DVC-EM, ONYXWorks, NFS-3030, NFS-640, and NCA).
  - Standard network for up to 103 nodes (NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCD, NCA-2, DVC-EM, ONYXWorks, NCS, NFS-3030, NFS-640, NCA, AFP-200, AFP-300/400, AFP-1010, and AM2020). Up to 54 nodes when DVC-EM is used in network paging.
- 6.0 A power supply with four Class A/B built-in Notification Appliance Circuits (NAC). Selectable System Sensor, Wheelock, or Gentex strobe synchronization.
- Built-in Alarm, Trouble, Security, and Supervisory relays.
- VeriFire® Tools online or offline programming utility. Upload/Download, save, store, check, compare, and simulate panel databases. Upgrade panel firmware.
- Autoprogramming and Walk Test reports.
- Multiple central station communication options:
  - Standard UDACT
  - Internet
  - Internet/GSM
- 80-character remote annunciators (up to 32).
- EIA-485 annunciators, including custom graphics.



- Printer interface (80-column and 40-column printers).
- History file with 800-event capacity in nonvolatile memory, plus separate 200-event alarm-only file.
- Alarm Verification selection per point, with automatic counter.
- Presignal/Positive Alarm Sequence (PAS).
- Silence inhibit and Auto Silence timer options.
- NAC coding functions:
  - March time.
  - Temporal.
  - California two-stage coding.
  - Canadian two-stage.
  - Strobe synchronization.
- Field-programmable on panel or on PC with VeriFire® Tools program check, compare, simulate.
- Full QWERTY keypad.
- Battery charger supports 18 – 200 AH batteries.
- Non-alarm points for lower priority functions.
- Remote ACK/Signal Silence/System Reset/Drill via monitor modules.
- Automatic time control functions, with holiday exceptions.
- Extensive, built-in transient protection.
- Powerful Boolean logic equations.

### SWIFT WIRELESS

- Self-healing mesh wireless protocol.
- Each SWIFT Gateway supports up to 50 devices: 1 wireless gateway and up to 49 SWIFT devices.
- Up to 4 wireless gateways can be installed with overlapping network coverage.

### RELEASING FEATURES

- Ten independent hazards.
- Sophisticated cross-zone (three options).
- Delay timer and Discharge timers (adjustable).
- Abort (four options).
- Low-pressure CO<sub>2</sub> listed.

**VOICE FEATURES**

- Integrates with FirstCommand Series. See DN-60772.
- Telephone applications require NFC-FFT.

**HIGH-EFFICIENCY OFFLINE SWITCHING**

**3.0 A POWER SUPPLY (6.0 A IN ALARM)**

- 120 VAC (NFS-320/NFS-320C); 240 VAC (NFS-320E).
- Displays battery current/voltage on panel (with display).

**FLASHSCAN® INTELLIGENT FEATURES**

- Polls up to 318 devices in less than two seconds.
- Activates up to 159 outputs in less than five seconds.
- Multicolor LEDs blink device address during Walk Test.
- Fully digital, high-precision protocol (U.S. Patent 5,539,389).
- Manual sensitivity adjustment — up to nine levels.
- Pre-alarm ONYX intelligent sensing — up to nine levels.
- Day/Night automatic sensitivity adjustment.
- Sensitivity levels:
  - **Photo** – 0.5 to 2.35%/foot obscuration.
  - **High-Sensitivity Photoelectric (VIEW®)** – Open Air Protection (0.5% - 2.0%/ft. obscuration), Special Applications (0.02%-0.5%/ft. obscuration)
  - **Multi-Criteria Detector** – Open Air Protection (2.52-3.89%/ft. obscuration), Special Applications (1.13-2.52%/ft. obscuration)
- Drift compensation (U.S. Patent 5,764,142).
- Degraded mode: In the unlikely event that the NFS-320's primary microprocessor fails, FlashScan detectors revert to degraded operation and can activate the control panel's NAC circuits and alarm relay. Each of the four built-in panel circuits includes a Disable/Enable switch for this feature.
- Multi-detector algorithm involves nearby detectors in alarm decision (U.S. Patent 5,627,515).
- Automatic detector sensitivity testing (NFPA-72 compliant).

- Maintenance alert (two levels).
- Self-optimizing pre-alarm.

**FSV-951 SERIES VIEW® (VERY INTELLIGENT EARLY WARNING)**

**HIGH-SENSITIVITY SMOKE DETECTOR**

- Advanced ONYX intelligent sensing algorithms differentiate between smoke and non-smoke signals.
- Addressable operation pinpoints the fire location.
- Ivory models (-IV) support CLIP mode as well as FlashScan.
- ULC listed models available; "A" models are ULC Listed.
- -R is retrofit, backwards compatible for use with older panels.

**FCO-951-IV ADVANCED MULTI-CRITERIA FIRE/CO DETECTOR**


- Detects all four major elements of a fire (smoke, heat, CO, and flame).
- 135°F (57.2°C) fixed-temperature heat detector.
- Transmits an alarm signal due to heat.
- Separate signal for life-safety CO detection.
- Optional addressable sounder base for Temp-3 (fire) or Temp-4 (CO) tone.
- Automatic drift compensation of smoke sensor and CO cell.
- High nuisance-alarm immunity.
- ULC listed models available; -A models are ULC Listed.

**FPTI-951(A) INTELLIGENT MULTI-CRITERIA DETECTOR**

- Combined photoelectric, thermal, and infrared sensor
- UL 268 7th Edition and UL 521 Listed; Canadian models CAN/ULC S529 and CAN/ULC S530
- Microprocessor-based technology; combination photo, thermal, and infrared technology.

**FPC-951(A) PHOTOELECTRIC/CO SENSOR**

- Combined photoelectric and carbon monoxide sensor

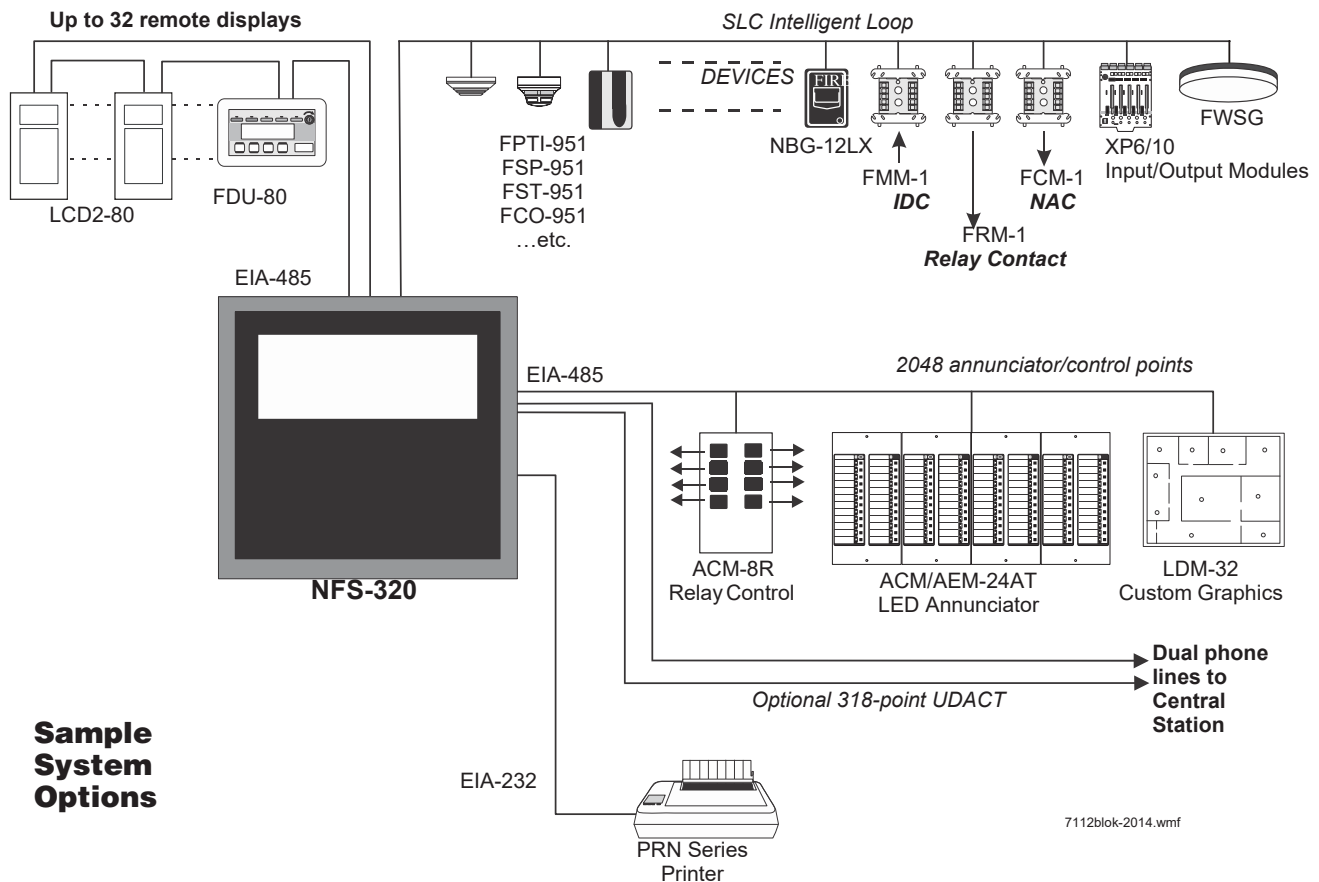

7112blok-2014.wmf

### **FSCO-95(A) INTELLIGENT CO SENSOR**

- Carbon monoxide sensor

### **FS-OSI-RI(A) ADDRESSABLE INTELLIGENT SINGLE-ENDED BEAM SMOKE DETECTOR**

- Intelligent addressable reflector-type linear optical beam smoke detector
- Fast, easy, and intuitive beam alignment indicated by directional LED arrows
- Long range coverage of 16-328 ft (5-100 m) is standard; no separate long-range kit required

### **INTELLIGENT VESDA DETECTORS**

- Intelligent aspiration smoke detectors connect directly to the SLC loop of compatible ONYX® Series panels:
  - VEA-040-A00-NTF, VEA-040-A10-NTF
  - VEP-A00-P-NTF, VEP-A10-P-NTF, VEP-A00-1P-NTF
  - VEU-A00-NTF, VEU-A10-NTF
- Models offer LED display, LCD display, or both
- Coverage options for spaces up to 69,965 square feet

## **FlashScan, Exclusive World-Leading Detector Protocol**

At the heart of the NFS-320 is a set of detection devices and device protocol — FlashScan (U.S. Patent 5,539,389). FlashScan is an all-digital protocol that gives superior precision and high noise immunity.

In addition to providing quick identification of an active input device, this protocol can also activate many output devices in a fraction of the time required by competitive protocols. This high speed also allows the NFS-320 to have the largest device per loop capacity in the industry — 318 points — yet every input and output device is sampled in less than two seconds. The microprocessor-based FlashScan detectors have bicolor LEDs that can be coded to provide diagnostic information, such as device address during Walk Test.

## **ONYX Intelligent Sensing**

Intelligent sensing is a set of software algorithms that provides the NFS-320 with industry-leading smoke detection capability. These complex algorithms require many calculations on each reading of each detector, and are made possible by the high-speed microcomputer used by the NFS-320.

**Drift Compensation and Smoothing:** Drift compensation allows the detector to retain its original ability to detect actual smoke, and resist false alarms, even as dirt accumulates. It reduces maintenance requirements by allowing the system to automatically perform the periodic sensitivity measurements required by NFPA 72. Smoothing filters are also provided by software to remove transient noise signals, such as those caused by electrical interference.

**Maintenance Warnings:** When the drift compensation performed for a detector reaches a certain level, the performance of the detector may be compromised, and special warnings are given. There are three warning levels: (1) Low Chamber value; (2) Maintenance Alert, indicative of dust accumulation that is near but below the allowed limit; (3) Maintenance Urgent, indicative of dust accumulation above the allowed limit.

**Sensitivity Adjust:** Nine sensitivity levels are provided for alarm detection. These levels can be set manually, or can change automatically between day and night. Nine levels of pre-alarm sensitivity can also be selected, based on predetermined levels of alarm. Pre-alarm operation can be latching or self-restoring, and can be used to activate special control functions.

**Self-Optimizing Pre-Alarm:** Each detector may be set for “Self-Optimizing” pre-alarm. In this special mode, the detector “learns” its normal environment, measuring the peak analog readings over a

long period of time, and setting the pre-alarm level just above these normal peaks.

**Cooperating Multi-Detector Sensing:** A patented feature of ONYX intelligent sensing is the ability of a smoke sensor to consider readings from nearby sensors in making alarm or pre-alarm decisions. Without statistical sacrifice in the ability to resist false alarms, it allows a sensor to increase its sensitivity to actual smoke by a factor of almost two to one.

## **Field Programming Options**

**Autoprogram** is a timesaving feature. The FACP “learns” what devices are physically connected and automatically loads them in the program with default values for all parameters. Requiring less than one minute to run, this routine allows the user to have almost immediate fire protection in a new installation, even if only a portion of the detectors are installed.

**Keypad Program Edit (with KDM-R2)** The NFS-320, like all NOTIFIER intelligent panels, has the exclusive feature of program creation and editing capability from the front panel keypad, while continuing to provide fire protection. The architecture of the NFS-320 software is such that each point entry carries its own program, including control-by-event links to other points. This allows the program to be entered with independent per-point segments, while the NFS-320 simultaneously monitors other (already installed) points for alarm conditions.

**VeriFire® Tools** is an offline programming and test utility that can greatly reduce installation programming time, and increase confidence in the site-specific software. It is Windows®-based and provides technologically advanced capabilities to aid the installer. The installer may create the entire program for the NFS-320 in the comfort of the office, test it, store a backup file, then bring it to the site and download from a laptop into the panel.

## **Placement of Equipment in Chassis and Cabinet**

The following guidelines outline the NFS-320’s flexible system design.

**Wiring:** When designing the cabinet layout, consider separation of power-limited and non-power-limited wiring as discussed in the *NFS-320 Installation Manual*.

It is critical that all mounting holes of the NFS-320 are secured with a screw or standoff to ensure continuity of Earth Ground.

**Networking:** If networking two or more control panels, each unit requires a Network Communication Module or High-Speed Network Communication Module (HS-NCM can support two nodes; see “Networking Options” on page 4). These modules can be installed in any option board position (see manual), and additional option boards can be mounted in front of them.

## **KDM-R2 Controls and Indicators**

**Program Keypad:** QWERTY type (keyboard layout).

**12 LED Indicators:** Power; Fire Alarm; Pre-Alarm; Security; Supervisory; System Trouble; Signals Silenced; Points Disabled; Control Active; Abort; Pre-Discharge; Discharge.

**Keypad Switch Controls:** Acknowledge/Scroll Display; Signal Silence; Drill; System Reset; Lamp Test.

**LCD Display:** 80 characters (2 x 40) with long-life LED backlight.

## Product Line Information

- “Configuration Guidelines” on page 4
- “Main System Components” on page 4
- “Networking Options” on page 4
- “Auxiliary Power Supplies and Batteries” on page 4
- “Audio Options” on page 4
- “Compatible Devices, EIA-232 Ports” on page 4
- “Compatible Devices, EIA-485 Ports” on page 4
- “Compatible Intelligent Devices” on page 5
- “Enclosures, Chassis, and Dress Plates” on page 6
- “Other Options” on page 6

### CONFIGURATION GUIDELINES

The NFS-320 system ships assembled; description and some options follow. See “Enclosures, Chassis, and Dress Plates” on page 6 for information about mounting peripherals.

Stand-alone and network systems require a main display. On stand-alone systems, the panel's keypad provides the required display. On network systems (two or more networked fire panel nodes), at least one NCD, NCA-2, NCS, or ONYXWorks annunciation device is required. (For NCA-2, see DN-7047. For NCD, see DN-60974.)

### MAIN SYSTEM COMPONENTS

**NFS-320:** The standard, factory-assembled NFS-320 system includes the following components: one control panel mounted on chassis (120 V operation — ships with grounding cable, battery interconnect cables, and document kit); includes integral power supply mounted to the main circuit board; one primary display KDM-R2 keypad/display; and one cabinet for surface or semi-flush mounting. Purchase batteries separately. One or two option boards may be mounted inside the NFS-320 cabinet; additional option boards can be used in remote cabinets. (Non-English versions also available. NFS-320-SP, NFS-320-PO.)

**NFS-320R:** Same as NFS-320, but in red enclosure.

**NFS-320C:** Based on NFS-320 above. NFS-320C supports installation of an optional ACM-series annunciator in the same cabinet. UL and ULC-listed. (Non-English version also available: NFS-320C-FR.) For NFS-320C, see DN-60085.

**NFS-320CR:** Same as NFS-320C but in a red enclosure. For NFS-320C, see DN-60085.

**NFS-320E:** Same as NFS-320, but with 240 V operation. (Non-English versions also available. NFS-320E-SP, NFS-320E-PO.)

**TR-320:** Trim ring for the NFS-320 cabinet.

### NETWORKING OPTIONS

**NCM-W, NCM-F:** Standard Network Communications Modules. Wire and multi-mode fiber versions available. See DN-6861.

**HS-NCM-W(-2), HS-NCM-MF, HS-NCM-SF, HS-NCM-WMF(-2), HS-NCM-WSF(-2), HS-NCM-MFSF:** High-speed Network Communications Modules. Wire, single-mode fiber, multi-mode fiber, and media conversion models are available. See DN-60454.

**RPT-W, RPT-F, RPT-WF:** Standard-network repeater board with wire connection (RPT-W), multi-mode fiber connection (RPT-F), or allowing a change in media type between wire and fiber (RPT-WF). Not used with high-speed networks. See DN-6971.

**ONYXWorks:** UL-listed graphics PC workstation, software, and computer hardware. See DN-7048 for specific part numbers.

**NFN-GW-EM-3:** NFN Gateway, embedded. See DN-60499.

**NWS-3:** NOTI•FIRE•NET™ Web Server. See DN-6928.

**CAP-GW:** Common Alerting Protocol Gateway. See DN-60756.

**VESDA-HLI-GW:** VESDAnet high-level interface gateway. See DN-60753.

**LED SIGN-GW:** UL-listed sign gateway. Interfaces with classic and high-speed NOTI•FIRE•NET networks through the NFN Gateway. See DN-60679.

**OAX2-24V:** UL-listed LED sign, used with LED SIGN-GW. See DN-60679.

### AUXILIARY POWER SUPPLIES AND BATTERIES

**ACPS-610:** 6.0 A or 10.0 A addressable charging power supply. See DN-60244.

**APS2-6R:** Auxiliary Power Supply. Provides up to 6.0 amperes of power for peripheral devices. Includes battery input and transfer relay, and overcurrent protection. Mounts on two of four positions on a CHS-4L or CHS-4 chassis. See DN-5952.

**FCPS-24S6/S8:** Remote 6 A and 8 A power supplies with battery charger. See DN-6927.

**BAT Series:** Batteries. NFS-320 uses two 12 volt, 18 to 200 AH batteries. See DN-6933.

### AUDIO OPTIONS

**NFC-50/100:** 25 watt, 25 VRMS, emergency Voice Evacuation Control Panel (VECP) with integral commercial microphone, digital message generator, and Class A or Class B speaker circuits. See DN-60772.

### COMPATIBLE DEVICES, EIA-232 PORTS

**PRN-7:** 80-column printer. See DN-60897.

**VS4095/5:** Printer, 40-column, 24 V. Mounted in external backbox. See DN-3260.

**DPI-232:** Direct Panel Interface, specialized modem for extending serial data links to remotely located FACPs and/or peripherals; mount on NFS-320 chassis. See DN-6870.

### COMPATIBLE DEVICES, EIA-485 PORTS

**ACM-24AT:** ONYX Series ACS annunciator — up to 96 points of annunciation with Alarm or Active LED, Trouble LED, and switch per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) by point to be red, green, or yellow; the Trouble LED is always yellow. See DN-6862.

**AEM-24AT:** Same LED and switch capabilities as ACM-24AT, expands the ACM-24AT to 48, 72, or 96 points. See DN-6862.

**ACM-48A:** ONYX Series ACS annunciator — up to 96 points of annunciation with Alarm or Active LED per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) in groups of 24 to be red, green, or yellow. Expandable to 96 points with one AEM-48A. See DN-6862.

**AEM-48A:** Same LED capabilities as ACM-48A, expands the ACM-48A to 96 points. See DN-6862.

**ACM-8R:** Remote Relay Module with eight Form-C contacts. Can be located up to 6,000 ft. (1828.8 m) from panel on four wires. See DN-3558.

**FDU-80:** Terminal mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. See DN-6820.

**LCD2-80:** Terminal and ACS mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. See DN-60548.

**LDM:** Lamp Driver Modules LDM-32, LDM-E32, and LDM-R32; remote custom driver modules. See DN-0551.

**SCS:** Smoke control stations SCS-8, SCE-8, with lamp drivers SCS-8L, SCE-8L; eight (expandable to 16) circuits (HVAC only). See DN-4818.

**TM-4:** Transmitter Module. Includes three reverse-polarity circuits and one municipal box circuit; mount on NFS-320 chassis or remotely. See DN-6860.

**UDACT-2:** Universal Digital Alarm Communicator Transmitter, 636 channel. *See DN-60686.*

**UZC-256:** Programmable Universal Zone Coder provides positive non-interfering successive zone coding. Microprocessor-controlled, field-programmable from IBM®-compatible PCs (requires optional programming kit). Mounts in **BB-UZC**. *See DN-3404.*

#### **COMPATIBLE INTELLIGENT DEVICES**

**NOTE:** “A” suffix indicates ULC-Listed model:

**FWSG Wireless SWIFT Gateway:** Addressable gateway supports wireless SLC devices. Not appropriate for ULC applications. *See DN-60820.*

**FCO-951-IV** FlashScan, Addressable intelligent multi-criteria smoke sensors, photo, carbon monoxide, fixed temperature heat detector and infra-red (IR). ULC: FCO-951A-IV

**FPC-951.** FlashScan, Combined photoelectric and carbon monoxide sensor. ULC: FPC-951A.

**FSCO-951.** FlashScan, Addressable carbon monoxide sensor. ULC: FSCO-951A.

**FPTI-951, FPTI-951-IV:** Addressable intelligent multi-criteria photoelectric, thermal and IR sensors. ULC: FPTI-951A, FPTI-951A-IV.

**FS-OSI-RI**Addressable intelligent single-ended beam smoke detector. ULC: FS-OSI-RIA.

**FSP-951:** White, low-profile intelligent photoelectric sensor, FlashScan only. ULC: FSP-951A.

**FSP-951-IV:** Ivory, low-profile intelligent photoelectric sensor. ULC: FSP-951A-IV

**FSP-951T:** White, same as FSP-951 but includes a built-in 135°F (57°C) fixed-temperature thermal device. FlashScan only. ULC: FSP-951TA.

**FSP-951T-IV:** Ivory, same as FSP-951T but includes a built-in 135°F (57°C) fixed-temperature thermal device. ULC: FSP-951TA-IV.

**FSP-951R:** White, low-profile intelligent photoelectric sensor, remote test capable. For use with DNR/DNRW. FlashScan only. ULC: FSP-95RA

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable. FlashScan only. ULC: FSP-95RA-IV, for use with DNRA.

**FST-951:** White, low-profile intelligent 135°F fixed thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951A. *See DN-60975.*

**FST-951-IV:** Ivory, low-profile intelligent 135°F fixed thermal sensor, FlashScan and CLIP. Must be mounted to one of the bases listed below. ULC: FST-951A-IV.

**FST-951R:** White, low-profile intelligent rate-of-rise thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951A

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable. FlashScan only. ULC: FSP-95RA-IV, for use with DNRA.

**FST-951H:** White, low-profile intelligent 190°F fixed thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951HA.

**FST-951H-IV:** Ivory, low-profile intelligent 190°F thermal sensor, FlashScan and CLIP. Must be mounted to one of the bases listed below. ULC: FST-951HA-IV.

**FSV-951, FSV-951R:**White, intelligent high-sensitivity photoelectric smoke detector. ULC: FSV-951A, FSV-951RA

**FSV-951-IV, FSV-951R-IV:**Ivory, intelligent high-sensitivity photoelectric smoke detector. ULC: FSV-951A-IV, FSV-951RA-IV.

**VEP-A00-P-NTF:** Intelligent aspiration smoke detector with LED display, 4 pipes, covers up to 21,520 square feet. *See DN-61029.* UL/ULC Listed.

**VEP-A10-P-NTF:** Intelligent aspiration smoke detector with LED and LCD display, 4 pipes, covers up to 21,520 square feet. *See DN-61029.* UL/ULC Listed.

**VEP-A00-1P-NTF:** Intelligent aspiration smoke detector with LED display, single pipe, covers up to 10,760 square feet. *See DN-61029.* UL/ULC Listed.

**VEU-A00-NTF:** Intelligent aspiration smoke detector with LED display, 4 pipes, covers up to 69,965 square feet. *See DN-61034.* UL/ULC Listed.

**VEU-A10-NTF:** Intelligent aspiration smoke detector with LED and LCD display, 4 pipes, covers up to 69,965 square feet. *See DN-61034.* UL/ULC Listed.

**VEA-040-A00-NTF:** Intelligent aspiration with LED display, 40 point-addressable detection points. Covers 36,000 square feet. *See DN-61036.* UL/ULC Listed.

**VEA-040-A10-NTF:** Intelligent aspiration with LED and LCD display, 40 point-addressable detection points. Covers 36,000 square feet. *See DN-61036.* UL/ULC Listed.

**DNR:** InnovairFlex low-flow non-relay duct-detector housing. ULC: DNRA. (Order FSP-951R(A) separately.) *See DN-60429.*

**DNRW:** Same as above with NEMA-4 rating, watertight. *See DN-60429.*

**B224RB-WH:** White, low-profile relay base. *See DN-60054.* ULC: B224RBA-WH.

**B224RB-IV:** Ivory, plug-in System Sensor relay base. ULC: B224RBA-IV.

**B224BI-WH:** White, isolator base for low-profile detectors. *See DN-60054.* ULC: B224BIA-WH.

**B224BI-IV:** Ivory isolator detector base. ULC: B224BIA-IV.

**B300-6:** White, standard flanged low-profile mounting base. (For 10-pack order B300-6-BP.) ULC: B300A-6.

**B300-6-IV:** Ivory, standard flanged low-profile mounting base. ULC: B300A-6-IV.

**B501-WHITE:** European-style, 4" (10.16 cm) base. *See DN-60054.* (For 10-pack order B501-WHITE-BP.) UL/ULC listed.

**B501-BL:** Black, 4" standard European flangeless mounting base. UL/ULC listed.

**B501-IV:** Ivory color, 4" standard European flangeless mounting base. UL/ULC listed.

**B200S-WH:** White, intelligent programmable sounder base, capable of producing a variety of tone patterns including ANSI Temporal 3. Compatible with synchronization protocol. *See DN-60054.* ULC: B200SA-WH.

**B200S-IV:** Ivory intelligent, programmable sounder base. ULC: B200SA-IV.

**B200SCOA-WH:** White intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO detectors. Based on B200SA. ULC listed.

**B200SCOA-IV:** Ivory intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO detectors. Based on B200SA. ULC listed.

**B200S-LF-WH:** White, low-frequency version of B200S. *See DN-60054.*

**B200S-LF-IV:** Ivory, low-frequency version of B200S.

**B200SR-WH:** White intelligent programmable sounder base, Temporal 3 or Continuous tone. For retrofit installations replacing B501BH series bases. *See DN-60054.* ULC: B200SRA-WH.

**B200SR-IV:** Ivory intelligent programmable sounder base, Temporal 3 or Continuous tone. For retrofit installations replacing B501BH series bases. ULC: B200SRA-IV.

**B200SR-LF-WH:** White, low-frequency version of B200SR. *See DN-60054.*

**B200SR-LF-IV:** Ivory, low-frequency version of B200SR.

**FMM-1:** FlashScan monitor module. *See DN-6720.*

**FDM-1(A):** FlashScan dual monitor module. *See DN-6720.*

**FZM-1(A):** FlashScan two-wire detector monitor module. *See DN-6720.*

**FMM-101(A):** FlashScan miniature monitor module. *See DN-6720.*

**FCM-1(A):** FlashScan control module. *See DN-6724.*

**FCM-1-REL(A):** FlashScan releasing control module. *See DN-60390.*

**FRM-1(A):** FlashScan relay module. *See DN-6724.*

**FDRM-1(A):** FlashScan dual monitor/dual relay module. *See DN-60709.*

**NBG-12LX:** Manual pull station, addressable. *See DN-6726.*

**N-MPS series:** Manual pull stations, addressable and conventional. For use in Canada only. *See DN-5497 and DN-60629.* **ISO-X(A):** Isolator module. *See DN-2243.*

**ISO-6(A):** Six fault isolator module. *See DN-60844.*

**XP6-C(A):** FlashScan six-circuit supervised control module. *See DN-6924.*

**XP6-MA(A):** FlashScan six-zone interface module; connects intelligent alarm system to two-wire conventional detection zone. *See DN-6925.*

**XP6-R(A):** FlashScan six-relay (Form-C) control module. *See DN-6926.*

**XP10-M(A):** FlashScan ten-input monitor module. *See DN-6923.*

#### **ENCLOSURES, CHASSIS, AND DRESS PLATES**

**CAB-BM Marine System:** Protects equipment in shipboard and waterfront applications. Also order **BB-MB** for systems using 100 AH batteries. For a full list of required and optional equipment, see *DN-60688.*

**NFS-LBB:** Battery Box (required for batteries larger than 26 AH).

**NFS-LBBR:** Same as above, but red.

**SEISKIT-320/B26:** Seismic mounting kit. Required for seismic-certified applications with NFS-320 and BB-26. Includes battery bracket for two 26 AH batteries.

**SEISKIT-BB25:** Seismic mounting kit for the BB-25. Includes battery bracket for two 26 AH batteries.

**SEISKIT-LBB:** Seismic kit for the NFS-LBB. Includes battery bracket for two 55 AH batteries.

#### **Backboxes**

NOTE: "C" suffix indicates ULC-Listed mode.

**ABF-1B** Annunciator Flush Box.

**ABF-1DB(C)** Annunciator Flush Box with Door.

**ABF-2B** Annunciator Flush Box

**ABF-2DB(C)** Annunciator Flush Box with Door

**ABF-4B** Annunciator Flush Box

**ABS-1TB(C)** Annunciator Surface Box

**ABS-1B(C)** Annunciator Surface Box

**ABS-2B** Annunciator Surface Box

**ABS-2D(C)** Annunciator Surface Box

**ABS-4D(C)** Annunciator Surface Box

**BB-UZC:** Backbox for housing the UZC-256. Required for NFS-320 applications. Black. For red, order BB-UZC-R.

#### **OTHER OPTIONS**

**411:** Slave Digital Alarm Communicator. *See DN-6619.*

**411UDAC:** Digital Alarm Communicator. *See DN-6746.*

**IPDACT-2/2UD, IPDACT Internet Monitoring Module:** Connects to primary and secondary DACT telephone output ports for internet communications over customer-provided Ethernet connection. Requires compatible Teldat VisorALARM Central Station Receiver. Can use DHCP or static IP. *See DN-60408.*

**IPSPLT:** Y-adaptor option allow connection of both panel dialer outputs to one IPDACT-2/2UD cable input.

**IPENC:** External enclosure for IPDACT, includes IPBRKT mounting bracket; Red. For Black order **IPENC-B**.

**HWF2V-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, Verizon LTE / IP. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. *See DH-62010.* (For Canadian applications order IPGSM-4GC. *See DH-60771.*)

**HWF2A-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, AT&T LTE / IP. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. (For Canadian applications order IPGSM-4GC. *See DH-60771.*)

**NFS-320-RB:** Replacement board with central processing unit (CPU). *NOTE: Keypad must be removed before shipping old unit out for repair.*

- NFS-320-RBE: Replacement CPU, Export.
- NFS-320-RB-PO: Replacement CPU, Portuguese.
- NFS-320-RB-POE: Replacement CPU, Export, Portuguese.
- NFS-320-RB-FR: Replacement CPU, Canadian French.
- NFS-320-RB-SP: Replacement CPU, Spanish.
- NFS-320-RB-SPE: Replacement CPU, Export, Spanish.

*NOTE: For other options including compatibility with retrofit equipment, refer to the panel's installation manual, the SLC manual, and the Device Compatibility Document.*

## SPECIFICATIONS

### SYSTEM CAPACITY

- Intelligent Signaling Line Circuits ..... 1
- Intelligent detectors ..... 159
- Addressable monitor/control modules ..... 159
- Programmable internal hardware and output circuits ..... 4
- Programmable software zones ..... 99
- Special programming zones ..... 14
- LCD annunciators per NFS-320/-320E ..... 32
- ACS annunciators  
per NFS-320/-320E ..... 32 addresses x 64 points

### ELECTRICAL SPECIFICATIONS

- Primary input power:
  - NFS-320: 120 VAC, 50/60 Hz, 5.0 A.
  - NFS-320E: 220/240 VAC, 50/60 Hz, 2.5 A.
- Current draw (standby/alarm):
  - NFS-320(E) board: 0.250 A. Add 0.035 A for each NAC in use.
  - KDM-R2 (Backlight on): 0.100 A.
- Total output 24 V power: 6.0 A in alarm.

**NOTE:** The power supply has a total of 6.0 A of available power. This is shared by all internal circuits. See Installation Manual for a complete current draw calculation sheet.

- Standard notification circuits (4): 1.5 A each.
- Resettable regulated 24V power: 1.25 A.
- Two non-resettable regulated 24V power outputs:
  - 1.25 A.
  - 0.50 A.
- Non-resettable 5V power: 0.15 A.
- Battery charger range: 18 AH – 200 AH. Use separate cabinet for batteries over 26 AH.
- Float rate: 27.6 V.

### CABINET SPECIFICATIONS

NFS-320 cabinet dimensions:

- Backbox: 18.12 in. (46.025 cm) width; 18.12 in. (46.025 cm) height; 5.81 in. (14.76 cm) depth.
- Door: 18.187 in. (46.195 cm) width; 18.40 in. (46.736 cm) height; 0.75 in. (1.905 cm) depth.
- Trim ring: Molding width is 0.905 in. (2.299 cm).
- Shipping weight (without batteries): 36.15 lb. (16.4 kg).

### TEMPERATURE AND HUMIDITY RANGES

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

### AGENCY LISTINGS AND APPROVALS

The listings and approvals below apply to the basic NFS-320 control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S635.
- **FM Approved.**
- **CSFM:** 7165-0028:0243.
- **MEA:** 128-07-E.
- **Fire Dept. of New York:** COA# 6212.
- **City of Chicago.**
- **ULC Listed:** S527-11

**NOTE:** For additional information on UL- and ULC-listed model NFS-320C, see DN-60085. For information on NFS-320SYS, see DN-60637.

**Marine Applications:** Marine approved systems must be configured using components itemized in this document. (See Main System Components, in "Product Line Information.") Specific connections and requirements for those components are described in the installation document, PN 54756. When these requirements are followed, systems are approved by the following agencies:

- **US Coast Guard** 161.002/50/0, 161.002/55/0 (Standard 46 CFR and 161.002).
- **Lloyd's Register** 11/600013 (ENV 3 category).
- **American Bureau of Shipping (ABS)** Type Approval.

**NOTE:** For information on marine applications, see DN-60688.

### STANDARDS

The NFS-320 complies with the following UL Standards and NFPA 72, International Building Code (IBC), and California Building Code (CBC) Fire Alarm Systems requirements:

- **UL 864** (Fire).
- **UL 1076** (Burglary).
- **UL 2572** (Mass Notification Systems). (NFS-320 version 20 or higher).
- **ULC-S527-11** Standard for the Installation of Fire Alarm Systems.
- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires TM-4).
- **REMOTE STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (requires TM-4).
- **PROPRIETARY** (Automatic, Manual, Waterflow and Sprinkler Supervisory). *Not applicable for FM.*
- **CENTRAL STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (requires DACT).
- **EMERGENCY VOICE/ALARM.**
- **OT, PSDN** (Other Technologies, Packet-switched Data Network).
- **IBC 2012, IBC 2009, IBC 2006, IBC 2003, IBC 2000** (Seismic).
- **CBC 2007** (Seismic).



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

NOTIFIRE®NET™, ONYXWorks™, and SWIFT™ are all trademarks of and FlashScan®, NOTIFIER®, ONYX®, VeriFire® Tools, and VIEW® are all registered trademarks of Honeywell International Inc.  
©2019 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

### NOTIFIER

12 Clintonville Road  
Northford, CT 06472  
203.484.7161  
www.notifier.com

Country of Origin: USA





# UOJZ.S635 - Control Units, System

## Control Units, System

**NOTIFIER**

12 Clintonville Rd  
Northford, CT 06472-1610 United States

S635

**UL 864 (10th edition)**

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
<b>Control unit "Inspire"</b>			
<b>N16E</b>	CS (PPU)	A, CO, M, SS, WF	DAC, PB
	L	A, M, SS, WF	C, March, NC
	RS (PPU)	A, CO, M, SS, WF	DAC
	P (PPU)	A, CO, M, SS, WF	DAC, PB
<b>N16E-R</b>	CS (PPU)	A, CO, M, SS, WF	DAC, PB
	P (PPU)	A, CO, M, SS, WF	DAC, PB
	RS (PPU)	A, CO, M, SS, WF	DAC
	L	A, M, SS, WF	C, March, NC
<b>N16X</b>	L	A, M, SS, WF	C, March, NC
	CS (PPU)	A, CO, M, SS, WF	DAC, PB
	P (PPU)	A, CO, M, SS, WF	DAC, PB
	RS (PPU)	A, CO, M, SS, WF	DAC



<b>FireWarden-100X</b>	P (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	RS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	L	A, CO, M, SS, WF	March, NC, T4
	AUX	A, M, WF	Rev Pol
	CS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
<b>FireWarden-50X</b>	P (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	CS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	RS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	L	A, CO, M, SS, WF	March, NC, T4
	AUX	A, M, WF	Rev Pol
<b>NFS2-3030 #(f) (c), NFS2-3030E #(f) (c), XLS3000 #(f) (c)</b>	P (PPU)	A, M, SS, WF	DAC, MX, NC, PB
	CS (PPU)	A, M, SS, WF	DAC, NC, PB
	L	A, M, SS, WF	C, NC
	AUX	A, M, WF	NC
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
<b>NFS2-640 (R) #(g) (c), NFS2-640E (R) (c) #(g), NFS-320 (R) #(g), NFS-320E/C (R) #(g) (c), NFS-320SYS(E)(-FR) #(g)(c)</b>	L	A, M, SS, WF	C, MX, NC
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	AUX	A, M, WF	NC
	CS (PPU)	A, M, SS, WF	DAC, MX, NC, PB
	P (PPU)	A, M, SS, WF	DAC, MX, NC, PB
<b>NFW-100X</b>	P (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	L	A, CO, M, SS, WF	March, NC, T4

	CS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	RS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	AUX	A, M, WF	Rev Pol
<b>NFW-50X</b>	AUX	A, M, WF	Rev Pol
	RS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	L	A, CO, M, SS, WF	March, NC, T4
	P (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol
	CS (PPU)	A, CO, M, SS, WF	DAC, PB, Rev Pol

**UL 864 (9th edition)**

<b>Model</b>	<b>Control Unit System Type(s)</b>	<b>Initiating Device Type(s)</b>	<b>Signaling Type(s)</b>
<b>Firewarden-100 (d)</b>	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	NC
	RS (PPU)	A, M, SS, WF	C
	CS (PPU)	A, M, SS, WF	DAC
	P (PPU)	A, M, SS, WF	C, DAC, OT
	RS (PPU)	A, M, SS, WF	DAC, OT
	RS (PPU)	A, M, SS, WF	Rev Pol
<b>Firewarden-100-2 (d), Firewarden 100-2E (d)</b>	L	A, M, SS, WF	March, NC
	RS (PPU)	A, M, SS, WF	Rev Pol
	RS (PPU)	A, M, SS, WF	C
	AUX	A, M, WF	NC

	RS (PPU)	A, M, SS, WF	DAC, OT
	P (PPU)	A, M, SS, WF	C, DAC, OT
	CS (PPU)	A, M, SS, WF	DAC, OT
<b>FireWarden-50 (e), FireWarden-50E (e)</b>	AUX	A, M, WF	NC
	L	A, M, SS, WF	C, March, NC
	P (PPU)	A, M, SS, WF	C, DAC, OT
	CS (PPU)	A, M, SS, WF	DAC, OT
	RS (PPU)	A, M, SS, WF	DAC, NC, OT, Rev Pol
<b>NCS5-W-ONYX, NCS5-F-ONYX</b>	CS, P (RU)	A, M, SS, WF	MX
<b>NFW-100 (d)</b>	RS (PPU)	A, M, SS, WF	C
	RS (PPU)	A, M, SS, WF	DAC, OT
	RS (PPU)	A, M, SS, WF	Rev Pol
	CS (PPU)	A, M, SS, WF	DAC
	P (PPU)	A, M, SS, WF	C, DAC, OT
	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	NC
<b>NFW-50 (e), NFW-50E (e)</b>	AUX	A, M, WF	NC
	L	A, M, SS, WF	C, March, NC
	CS (PPU)	A, M, SS, WF	DAC, OT
	RS (PPU)	A, M, SS, WF	DAC, NC, OT, Rev Pol
	P (PPU)	A, M, SS, WF	C, DAC, OT
<b>NFW2-100 (d), NFW2-100E (d)</b>	CS (PPU)	A, M, SS, WF	DAC, OT

	RS (PPU)	A, M, SS, WF	C
	AUX	A, M, WF	NC
	L	A, M, SS, WF	March, NC
	P (PPU)	A, M, SS, WF	C, DAC, OT
	RS (PPU)	A, M, SS, WF	Rev Pol
	RS (PPU)	A, M, SS, WF	DAC, OT
<b>NSP-25, NSP-25E</b>	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF	DAC, OT
	L	A, M, SS, WF	C, NC
<b>RP-1001*</b>	P (PPU)	A, M, WF	NC
	L	A, M, SS, WF	NC
	AUX	A, M, WF	NC
	RS (PPU)	A, M, WF	NC
	RS (PPU)	A, M, WF	DAC
	CS (PPU)	A, M, WF	DAC
<b>RP-1002*, RP-1002E*</b>	P (PPU)	A, M, WF	NC
	CS (PPU)	A, M, WF	DAC
	RS (PPU)	A, M, WF	DAC
	RS (PPU)	A, M, WF	NC
	AUX	A, M, WF	NC
	L	A, M, SS, WF	NC
<b>RP-2001 (2)(h), RP-2001E (2)(h), RP-2002 (2)(h), RP-2002E (2)(h)</b>	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	NC
	CS (PPU)	A, M, SS, WF	DAC
	P (PPU)	A, M, WF	C, DAC

	RS (PPU)	A, M, SS, WF	DAC, NC, Rev Pol
<b>S5000 #(b)</b>	CS, RS (PPU)	A, M, SS, WF	DAC
	CS (PPU)	A, M, WF	C, DAC, NC
	AUX, L, P (PPU), RS (PPU)	A, M, SS, WF	C, NC
	RS (PPU)	SS	Rev Pol
<b>S5000E (b)</b>	CS (PPU)	A, M, WF	C, DAC, NC
	CS, RS (PPU)	A, M, SS, WF	DAC
	RS (PPU)	SS	Rev Pol
<b>SFP-2402 (a)</b>	L	A, M, SS, WF	March, NC
	CS (PPU)	A, M, SS, WF	DAC
	P (PPU)	A, M, SS, WF	C
<b>SFP-2402E (i), SFP-2404E (i)</b>	CS (PPU)	A, M, SS, WF	DAC
	P (PPU)	A, M, SS, WF	C
	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	NC
<b>SFP-2404 (i)</b>	AUX	A, M, WF	NC
	CS (PPU)	A, M, SS, WF	DAC
	L	A, M, SS, WF	March, NC
	P (PPU)	A, M, SS, WF	C
	RS (PPU)	A, M, SS, WF	Rev Pol
<b>SFP-400*(j), SFP-400B*(j)</b>	RS (PPU)	A, M, WF	DAC
	P (PPU)	A, M, WF	NC
	RS (PPU)	A, M, SS, WF	Rev Pol
	AUX	A, M, WF	NC

	CS (PPU)	A, M, WF	DAC
	L	A, M, SS, WF	NC
<b>SFP-5UD (1)(h), SFP-10UD (1)(h), SFP-5UDE (1)(h), SFP-10UDE (1)(h), SFP-10UDC (1)(h), SFP-5UDC (1)(h)</b>	CS (PPU)	A, M, SS, WF	DAC, OT
	P (PPU)	A, M, SS, WF	C, DAC, OT
	RS (PPU)	A, M, SS, WF	DAC, NC, OT, Rev Pol
	AUX	A, M, WF	NC
	L	A, M, SS, WF	March, NC
<b>SGL-404</b>	CS (PPU)	A, M, WF	NC
	AUX, L	A, M, SS, WF	NC
	RS (PPU)	A, M, WF	NC
<b>XP Transponder #</b>	L	A, M, WF	NC
	AUX, P (PPU)	A, M, WF	MX, NC

### UL 864 (10th edition)

**Subassembly** Model(s) 50162234, AMPS-24 Power Supply, AMPS-24E Power Supply, BDA-25V Backup Digital Audio Amplifier, BDA-70V Backup Digital Audio Amplifier, BP-5, CAB-AA4(n), CPS-24 Power Supply, CPS-24E Power Supply, CPU-320 Central Processing Unit Board, CPU-N16-RB, CPU-N16LD, CPU-N16LND, CPU2-3030D CPU Board with Display, CPU2-640 Central Processing Unit Board, CPU2-640E Central Processing Unit Board, DIS-10-RD, DP-4A, DP-BLN, DP-T2A, DR-A5, DR-B5, DR-C5, DR-D5, DR-E5, DS-FM, DS-RFM, DS-SFM Fiber Conversion Module, DTR-A5, DTR-B5, DTR-C5, DTR-D5, DTR-E5

**Subassembly** Model(s) DVC, DVC-EM, DVC-EMF, DVC-EMSF Digital Voice Command

**Subassembly** Model(s) DVC-AO Audio Output Board, DVC-KD Keypad Board, LCM-320 Loop Control Module, LEM-320 Loop Expander Module, MIC-1 Microphone, NBB-2, NCD Network Control Display, NCM-F, NCM-W Network Control Module, NCM-W Network Control Module, PMB-AUX, PMB-AUX-RTO, SBB-A5, SBB-B5, SBB-C5, SBB-D5, SBB-E5, SLM-318, TELH-1 Firefighters Telephone Handset, TM-4 Transmitter Module

**Subassembly - Supplementary network bridge** Model(s) SK-WEBPORTAL

**Subassembly - Supplementary network bridge** Model(s) GW-WEBPORTAL

**Subassembly, amplifier** Model(s) AA-100, AA-100E, AA-120, AA-120E, AA-30, AA-30E, DAA2-5025, DAA2-5025-CLA, DAA2-5025E, DAA2-5025E-CLA, DAA2-5070, DAA2-5070-CLA, DAA2-5070E, DAA2-5070E-CLA, DAA2-7525, DAA2-7525-CLA, DAA2-7525E, DAA2-7525E-CLA

**Subassembly, backbox** Model(s) SBB-A4(l), SBB-B4(l), SBB-C4(l), SBB-D4(l)

**Subassembly, battery holder chassis** Model(s) CHS-BH1

**Subassembly, chassis** Model(s) CHS-2D, CHS-4L, CHS-4N, CHS-M2, CHS-M3

**Subassembly, door** Model(s) ADDR-B4(l), ADDR-C4(l), ADDR-D4(l), DR-A4(l), DR-AA4, DR-AA4BR, DR-AA4R, DR-B4(l), DR-C4(l), DR-D4(l), DR-PS1, EQDR-B4(l), EQDR-C4(l), EQDR-D4(l)

**Subassembly, dress panel** Model(s) ADP-4B, BM-1B, BP-4, BP2-4, DP-1B, DP-DISP, DP-GDIS1, DP-GDIS2, DPA-1, DPA-1A4, DPA-2, DPDW-1B, DPSW-1B, MP-1B, VP-2B

**Subassembly, enclosure** Model(s) ABF-1(m), ABF-2(m), ABF-4(l), ABS-1(l), ABS-1T(l), ABS-2(l), ABS-2D(l), ABS-4D(l), ABS-8R, ABS-TD,

BB-100, BB-100R, BB-200, BB-200R, BB-UZC, CA-1, CA-2, CAB-A4(I), CAB-B4(I), CAB-C4(I), CAB-D4(I), CAB-PS1, CAB-RP, CAB-RPR, EQBB-B4(I), EQBB-C4(I), EQBB-D4(I), SBB-AA4, SBB-AA4B, SBB-AA4R

**Subassembly, microphone chassis** Model(s) CMIC-1

**Subassembly, power supply** Model(s) DAA-PS

### UL 864 (9th edition)

**Battery Boxes** Model(s) BB-17

**Control Unit Subassemblies - Intended for use with compatible control units as described in the control unit installation manual**

Model(s) N-CAC-5X (1) class A converter module

**Fire Alarm System Enclosures** Model(s) NFS-LBRR

**Proprietary System Ancillary Display** Model(s) NWS, NWS-2, NWS-3, ONYXWeb

**Subassembly** Model(s) 4XLM LED Interface Module, 4XTM Transmitter Module, 4XZM Zone Relay Module, BacNet-GW-3 Interface, CMIC-RP Microphone, CPU2-3030ND CPU Board without Display, DS-DB Distribution Board, DS-XF70V Audio Transformer, DVC-RPU Remote Paging Unit, KAPS-24 Power Supply, KDM-R2 Keyboard Display Module, MODBUS-GW Interface, N-WEBPORTAL Supplementary Network Bridge, Vesda-HLI-GW Interface

**Subassembly, digital amplifier** Model(s) DS-AMP/E

CS (PPU) - Central Station System (Protected Premises Unit)

A - Automatic Fire Alarm: thermostats, smoke detectors, etc.

CO - Carbon Monoxide Alarm: carbon monoxide detectors

M - Manual Fire Alarm: manually operated boxes

SS - Supervisory: gate valves, water-level switches, temperature switches, carbon monoxide alarm, residential fire alarm control units, etc.

WF - Waterflow Alarm: waterflow switches

DAC - Digital Alarm Communicator

PB - Performance Based Technologies

L - Local System

C - Coded

March - March Time

NC - Noncoded, Steady, Temporal 3 Pattern, etc.

RS (PPU) - Remote Station System (Protected Premises Unit)

P (PPU) - Proprietary System (Protected Premises Unit)

Rev Pol - Reverse Polarity

T4 - Temporal 4 Pattern

AUX - Auxiliary System

MX - Multiplex

OT - Other Transmission Technologies

CS - Central Station System

P (RU) - Proprietary System (Supervising Station Receiving Unit)

# - When Local (L) Type, System control unit with additional emergency voice communication, emergency telephone communication and paging.

(1) - Models are complementary Listed to FSZI, SYZV and QVAX.

(2) - Models are complementary Listed to FSZI, SYZV and QVAX when the System Type is Local.

(a) - When the Type Signaling is Coded (C) or Digital Alarm Communicator (DAC), see footnote +.

(b) - When Central Station (PPU) Type or Type Signaling is Digital Alarm Communicator (DAC), see footnote +.

- (c) - When type signaling is OTHER TECHNOLOGIES, see footnote +
  - (d) - When Type Signaling is Digital Alarm Communicator (DAC), Coded (C) or Other Technologies (OT) see footnote +. When Type Signaling is Reverse Polarity - requires separately Listed Model 4XTMF transmitter module.
  - (e) - Noncoded (NC) or Coded (C) Type Signaling (except when Type is Local (L) Rev. Pol. Type Signaling, see footnote +.
  - (f) - When Type Signaling is Coded (C), Digital Alarm Communicator (DAC) or Reverse Polarity, see footnote +.
  - (g) - When Type Signaling is Coded (C), see footnote +.
  - (h) - When Type is Auxiliary or Type Signaling is Reverse Polarity- requires separately Listed Model 4XTMF transmitter Module. When the Type is any Protected Premises Unit (PPU) and the Type Signaling is Coded (C), Non Coded (NC) or Digital Alarm Communicator (DAC), see footnote +.
  - (i) - When the Type is Auxiliary or the Type Signaling is Coded (C) or Digital Alarm Communicator (DAC), see footnote +.
  - (j) - When Type Signaling is Reverse Polarity, see footnote +.
  - (l) - May include /R, /F or /B suffix.
  - (m) - May include /R, /F, /B or /D suffix.
  - (n) - The CAB-AA4 backbox Series is made up of the SBB-AA4, SBB-AA4R, SBB-AA4B, SBB-AA4BR enclosures, and the DR-AA4, DR-AA4B, DR-AA4R, DR-AA4BR Doors.
- \* - Protected Premises Unit when installed and interconnected with additional Listed equipment as described in the units installation instructions.
- + - Must be employed with additional specific Listed device(s) as indicated in installation instructions and wiring diagrams to provide indicated type service. The installation instructions for the Other Transmission Technologies transmitter will specify the compatible Notifier control unit model.

Last Updated on 2021-04-12

---

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2021 UL LLC"



## Electrical Signaling

Electrical protective signaling systems are configurations of components used to produce alarm signals indicative of fire, smoke, sprinkler waterflow or other emergency and to produce supervisory signals indicative of conditions needing attention with respect to protection equipment or watch service. System configurations are classified according to where and how the signals are received. The categories are commonly designated as local, municipal, remote station, proprietary, emergency voice/alarm communication, emergency communication, and central station. Auxiliary systems are either local or proprietary systems interconnected with a municipal system.

This category presents the major system component categories and the integrated system configurations. The selection of components to form a hybrid system should be made only by those skilled in system design. Also, the suitability of any system application should be judged on the basis of the hazard(s) being protected.

## Local Protective Signaling

Local systems produce alarm and/or supervisory signals within the protected property, which may not be constantly attended. The systems are electrically supervised, include a secondary power supply having sufficient capacity to operate the system for 24 hours under maximum normal load and often are primarily for the purpose of providing occupant evacuation signals. Some local systems also provide for signaling to a constantly attended remote location.

The heart of a signaling system consists of a control unit to which are connected the initiating and signal indicating circuits. The control unit is usually in a separate enclosure, provides power to its external circuits, and often is of modular design to enable flexibility in obtaining multiple functions. In a coded signaling system, transmitters may be either separate from or integral to a control; they transmit to the control or from a control to remote receiving equipment. The equipment listed below, in conjunction with peripheral devices, may be used to form a complete system or a portion of a multizone system.

## NFS-320(E)(C) Fire Alarm Control Panel

NFS-320(E)(C) Fire Alarm Control Panel. Control uses firmware revision level #N62V12.00. Basic system consists of a combination of CPU 320 or CPU-320E Motherboard, KDM-R2 Keyboard Display Module and KAPS-24/E uses firmware revision level #KAPSV1.1, or CPS-24/E uses firmware revision level #CPSV1.0, power supply (mounts directly on the control panel) The KAPS-24/E power supply provides total 3 A in standby and 6 A in alarm. The CPS-24/E can provide 0.5 A @ 24 VDC and 0.15 A @ 5VDC Models NFS-320 and NFS-320C utilize KAPS-24 or CPS-24 power supply and use 120 Vac input power. Model NFS-320E utilizes KAPS-24E or CPS-24E power supply and uses 240 Vac input power. Model NFS-320C provides for an additional Model ACM-24AT or ACM-48A LED annunciator. The system provides one Signaling Line Circuit (SLC) which can be configured to meet Class B, Style 4, or Class A, Styles 6 or 7. The SLC is capable of supporting 159 addressable detectors and 159 addressable modules. The system provides four Class B, Style Y or four Class A, Style Z notification appliance circuit/releasing circuit outputs rated at 24 V dc 1.5 A plus two 24 V dc 1.25 A (total) auxiliary outputs (one resettable and one non-resettable). Optional modules are: ACPS-2406 Addressable/Charger Power Supply, FCPS-24 power supply, FCPS-24S6, power supply, FCPS-24S8 power supply, ACM-8R, TM-4 transmitter module required for auxiliary signaling connection. NFS 320 is capable of operating with the XP6 and XP10M series transponders. NFS-320 supports the NOTI-FIRE-NET network consisting of the NCS5-W-ONYX /NCS5-F-ONYX Network Control Station, NCM Series, HS-NCM Series, or HS-NCM-2 Series Network Control Module using firmware revision 31.xxx.xxx, NCM Series or HS-NCM Series Network Network Control Modules, NCA-2 Network Control Annunciator for use with NFS-3030, NFS2-3030, NFS-640, NFS2-640, NFS-320, AFP1010, AM2020, AFP-200 and/or AFP-300/400 fire alarm control panels. The following analog addressable Wenlock Heat detectors are compatible with the control: Models FST-951(A), NH-200, FST-951(A)-IV, NH-200-IV, FST-951R(A), NH-200R, FST-951H(A), FST-951R(A)-IV, NH-200R-IV, NH-200H, NH-200H-IV, and FST-951H(A)-IV; The following analog addressable Wenlock Smoke detectors are compatible with the control: Models FSP-951(A), NP-200, NP-200-IV, FSP-951(A)-IV, FSP-951T, NP-200T, NP-200T-IV, FSP-951T-ISO, FSP-951R(A), NP-200R, NP200R-IV, FSP-951R(A)-IV and FSP-951T(A)-IV. The following addressable detectors and modules are capable of working in both Flashscan and CLIP Protocol: Models FAPT-751 photoelectric and fixed temperature heat detectors 135°F (57°C), FSI-851(A) and FSI 751 ionization smoke detectors and FSC-851(A) Multi Criteria Detector; FSH-751(A) photoelectric detector used with B710HD(A) base; FSL 751 Laser smoke detector; FSP-851(A), FSP-851T(A), FAPT-851(A), FSC-851(A) Multi Criteria and FSP 751 photoelectric smoke detectors, FSP 751T combinations of photoelectric sensor and 135°F (57°C) fixed temperature sensor, FST 751 Thermistor type smoke sensor, and FST 751R Thermal Rate of Rise Detector used with Models B710LP(A) standard US base and B501standard European base; B501BH, B501BH-2 sounder base, B501BHT, B501BHT-2 temporal sounder base, B224RB relay base, B224BI isolator base, FSD-751PL, FSD-751RPL, FSD 751 and FSD-751RP Photoelectric duct detectors; Models FSB-200(A) and FSB-200S(A) beam type detectors. Thermal detectors: FST-851(A) 135°F (57.2°C): 25 by 25 ft (7.6 m by 7.6 m) maximum spacing, FST-851R(A) 135°F (57.2°C): 25 by 25 ft (7.6 m by 7.6 m) maximum spacing, and FST-851H(A) 190°F (87.8°C) fixed temperature alarm: 20 by 20 ft (6.1 m by 6.1 m) maximum spacing. FZM 1, FDM-1(A), FMM 101 Monitor Modules, FCM-1(A), FRM-1(A), XP-6 Control Modules, NBG-12LX and NBG-12LXSP addressable pull stations. The following addressable detectors are available in CLIP.protocol: IPX-751 photoelectric, ionization, and thermal smoke detector, FSL 751 Laser smoke detector; DNR(A) addressable two-wire air duct smoke detector; LPX-751(A) Photoelectric laser detector used with base Models B710LP(A) standard US base and B501standard European base; B501BH, B501BH-2 sounder base, B501BHT, B501BHT-2 temporal sounder base, B224RB relay base, B224BI isolator base. HPX-751 photoelectric detector used with B710HD(A) base; CPX 551, and SDX 551; SDX 551TH photoelectric with 135°F (57°C) thermal element; FDX 551 135°F (57°C) thermal detector (spacing guide 30 x 30 ft [9 x 9 m] max); FDX 551R 135°F (57°C) fixed temperature/rate of rise thermal sensor (spacing guide 30 x 30 ft [9 x 9 m] max); (sensor model numbers may be followed by "A"). Thermal detectors: FST-851(A) 135°F (57.2°C): 25 by 25 ft (7.6 m by 7.6 m) maximum spacing, FST-851R(A) 135°F (57.2°C): 25 by 25 ft (7.6 m by 7.6 m) maximum spacing, and FST-851H(A) 190°F (87.8°C) fixed temperature alarm: 20 by 20 ft (6.1 m by 6.1 m) maximum spacing. SDX 751 photoelectric used with base Models B710LP(A) and B501. Model BGX 101L, Models MMX 1, MMX 2, FMM 1, MMX 101, Monitor Modules, ISO X Fault Isolation, CMX 1, CMX 2, Control Modules, FDRM-1(A) 2in / 2out module. The following module is capable of working in Flashscan protocol: FCM-1(A)-1REL When required, the following Remote Annunciators may be used ACM 8R, ACM 16AT, AEM 16AT, ACM 32A, AEM 32A, AFM 16AT, ACM-24AT, ACM-48A, AEM-24AT, AEM-48A, LDM 32, LDM E32, LDM R32, LCD 80, LCD2-80, FDU-80, FDU-80G. Models ACM-24AT and ACM-48A uses firmware revision level #ACM-1.4. Model LCD-80 uses firmware revision level #LCD80R2.0. Model LCD2-80 uses firmware revision level #LCD280V2.0. Standby batteries (24 V dc up to 200AH) provide 24 hour standby operation. Model PRN-6 auxiliary printer may be used. (See also

CENTRAL STATION SIGNALING SYSTEMS, AUTOMATIC RELEASES FOR EXTINGUISHING SYSTEMS AND OTHER FIRE PROTECTIVE EQUIPMENT, AUTOMATIC RELEASES FOR PREACTION AND DELUGE SPRINKLER SYSTEMS and EMERGENCY VOICE/ALARM COMMUNICATIONS SYSTEMS listings.

<b>Company Name:</b>	Notifier
<b>Company Address:</b>	12 Clintonville Rd, Northford, Connecticut 06472-1653, USA
<b>Company Website:</b>	<a href="http://notifier.com">http://notifier.com</a>
<b>New/Updated Product Listing:</b>	No
<b>Listing Country:</b>	United States of America
<b>Certification Type:</b>	FM Approved

# NFS2-640(E)

## Intelligent Addressable Fire Alarm System



### Intelligent Fire Alarm Control Panels

#### General

The NFS2-640 intelligent Fire Alarm Control Panel is part of the ONYX® Series of Fire Alarm Controls from NOTIFIER.

In stand-alone or network configurations, ONYX Series products meet virtually every application requirement.

The NFS2-640's modular design makes system planning easier. The panel can be configured with just a few devices for small building applications, or networked with many devices to protect a large campus or a high-rise office block. Simply add additional peripheral equipment to suit the application.

A host of other options are available, including single- or multi-channel voice; firefighter's telephone; LED, LCD, or PC-based graphic annunciators; networking; advanced detection products for challenging environments; wireless fire protection; and many additional options.

**NOTE:** Unless called out with a version-specific "E" at the end of the part number, "NFS2-640" refers to models NFS2-640 and NFS2-640E; similarly, "CPU2-640" refers to models CPU2-640 and CPU2-640E.

#### Features

- Certified for seismic applications when used with the appropriate seismic mounting kit.
- Approved for Marine applications when used with listed compatible equipment. See DN-60688.
- One, expandable to two, isolated intelligent Signaling Line Circuit (SLC) Style 4, 6 or 7.
- Wireless fire protection using SWIFT Smart Wireless Integrated Fire Technology. See DN-60820.
- Up to 159 detectors and 159 modules per SLC; 318 devices per loop/636 per FACP or network node.
  - Detectors can be any mix of ion, photo, thermal, or multi-sensor; wireless detectors are available for use with the FWSG.
  - Modules include addressable pull stations, normally open contact devices, two-wire smoke detectors, notification, or relay; wireless modules are available for use with the FWSG.
- Standard 80-character display, 640-character large display (NCA-2), or display-less (a node on a network).
- Network options:
  - High-speed network for up to 200 nodes (NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCA-2, DVC-EM, ONYXWorks, NFS-3030, NFS-640, and NCA).
  - Standard network for up to 103 nodes (NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCA-2, DVC-EM, ONYXWorks, NCS, NFS-3030, NFS-640, NCA, AFP-200, AFP-300/400, AFP-1010, and AM2020). Up to 54 nodes when DVC-EM is used in network paging.
- 6.0 A switch mode power supply with four Class A/B built-in Notification Appliance Circuits (NAC). Selectable System Sensor, Wheelock, or Gentex strobe synchronization.
- Built-in Alarm, Trouble, Security, and Supervisory relays.
- VeriFire® Tools online or offline programming utility. Upload/Download, save, store, check, compare, and simulate panel databases. Upgrade panel firmware.
- Autoprogramming and Walk Test reports.
- Multiple central station communication options:
  - Standard UDACT
  - Internet
  - Internet/GSM
- 80-character remote annunciators (up to 32).
- EIA-485 annunciators, including custom graphics.
- Printer interface (80-column and 40-column printers).
- History file with 800-event capacity in nonvolatile memory, plus separate 200-event alarm-only file.
- Alarm Verification selection per point, with automatic counter.
- Presignal/Positive Alarm Sequence (PAS).
- Silence inhibit and Auto Silence timer options.
- March time/temporal/California two-stage coding/strobe synchronization.
- Field-programmable on panel or on PC, with VeriFire Tools program check, compare, simulate.
- Full QWERTY keypad.
- Battery charger supports 18 – 200 AH batteries.
- Non-alarm points for lower priority functions.
- Remote ACK/Signal Silence/System Reset/Drill via monitor modules.
- Automatic time control functions, with holiday exceptions.
- Surface Mount Technology (SMT) electronics.
- Extensive, built-in transient protection.
- Powerful Boolean logic equations.
- Support for SCS Series smoke control system in HVAC mode.



NFS2-640

NFS2-640-DVC\_right.jpg

**NCA-2 AS PRIMARY DISPLAY**

- Backlit, 640-character display.
- Supports SCS Series smoke control system in FSCS mode when SCS is connected to the NCA-2 used as primary display.
- Supports DVC digital audio loop.
- Printer and CRT EIA-232 ports.
- EIA-485 annunciator and terminal mode ports.
- Alarm, Trouble, Supervisory, and Security relays.

**FLASHSCAN® INTELLIGENT FEATURES**

- Polls up to 318 devices in less than two seconds.
- Activates up to 159 outputs in less than five seconds.
- Multicolor LEDs blink device address during Walk Test.
- Fully digital, high-precision protocol (U.S. Patent 5,539,389).
- Manual sensitivity adjustment — up to nine levels.
- Pre-alarm ONYX intelligent sensing — up to nine levels.
- Day/Night automatic sensitivity adjustment.
- Sensitivity windows:
  - Ion – 0.5 to 2.5%/foot obscuration.
  - Photo – 0.5 to 2.35%/foot obscuration.
  - Laser (VIEW®) – 0.02 to 2.0%/foot obscuration.
  - Acclimate Plus™ – 0.5 to 4.0%/foot obscuration.
  - IntelliQuad™ – 1.0 to 4.0%/foot obscuration.
  - IntelliQuad™ PLUS – 1.0 to 4.0%/foot obscuration
- Drift compensation (U.S. Patent 5,764,142).
- Degraded mode — in the unlikely event that the CPU2-640 microprocessor fails, FlashScan detectors revert to degraded operation and can activate the CPU2-640 NAC

circuits and alarm relay. Each of the four built-in panel circuits includes a Disable/Enable switch for this feature.

- Multi-detector algorithm involves nearby detectors in alarm decision (U.S. Patent 5,627,515).
- Automatic detector sensitivity testing (NFPA-72 compliant).
- Maintenance alert (two levels).
- Self-optimizing pre-alarm.

**FSL-751 (VERY INTELLIGENT EARLY WARNING)**

**SMOKE DETECTION TECHNOLOGY**

- Advanced ONYX intelligent sensing algorithms differentiate between smoke and non-smoke signals (U.S. Patent 5,831,524).
- Addressable operation pinpoints the fire location.
- Early warning performance comparable to the best aspiration systems at a fraction of the lifetime cost.

**FAPT-851 ACCLIMATE PLUS**


**LOW-PROFILE INTELLIGENT MULTI-SENSOR**

- Detector automatically adjusts sensitivity levels without operator intervention or programming. Sensitivity increases with heat.
- Microprocessor-based technology; combination photo and thermal technology.
- Low-temperature warning signal at 40°F ± 5°F (4.44°C ± 2.77°C).

**FSC-851 INTELLIQUAD**

**ADVANCED MULTI-CRITERIA DETECTOR**

- Detects all four major elements of a fire (smoke, heat, CO, and flame).
- Automatic drift compensation of smoke sensor and CO cell.
- High nuisance-alarm immunity.

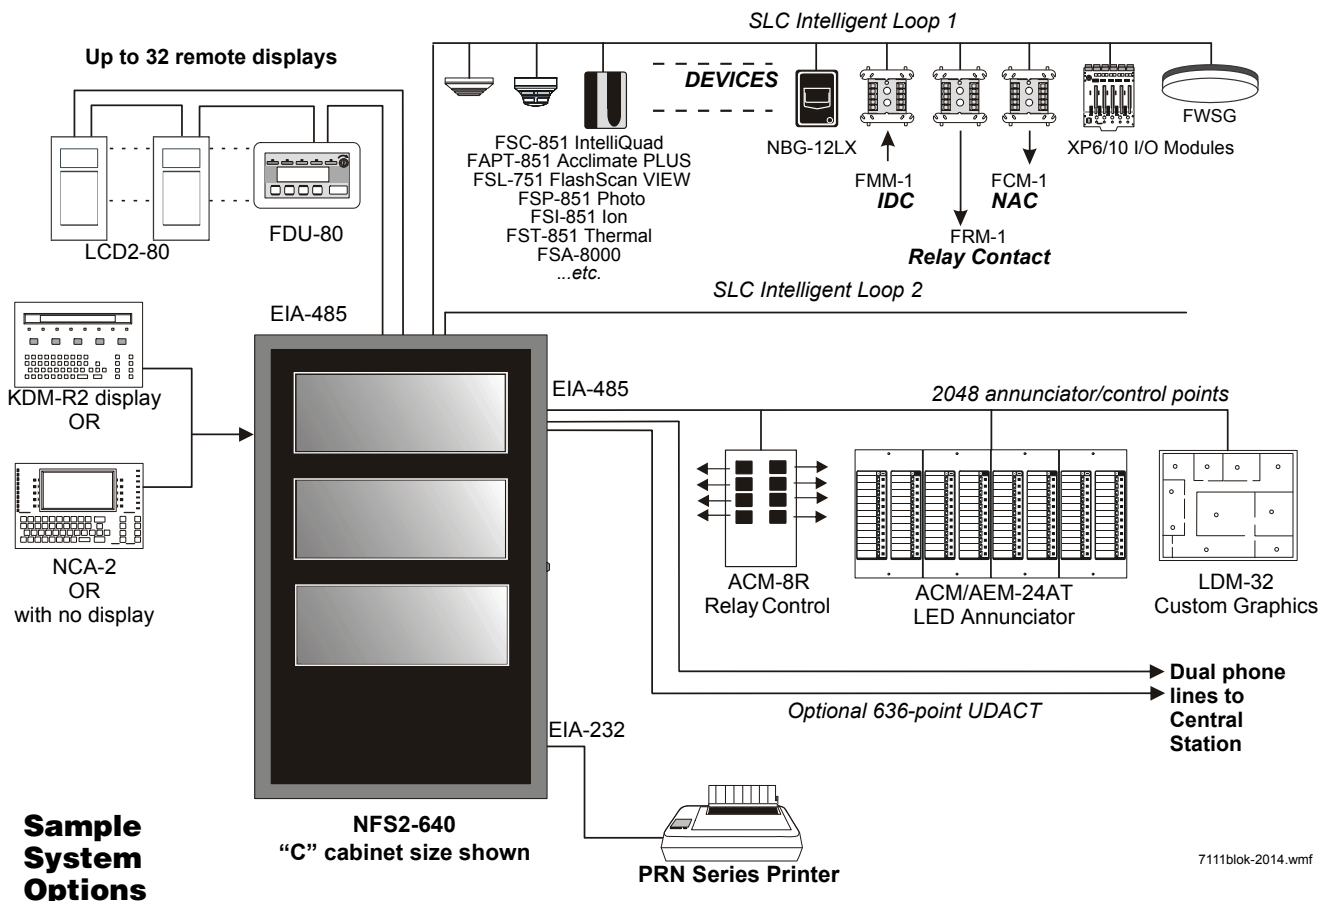

7111blok-2014.wmf

### **INTELLIGENT FAAST® DETECTORS FSA-5000, FSA-8000, AND FSA-20000**

- Connects directly to the SLC loop of compatible ONYX series panels.
- Provides five event thresholds that can be individually programmed with descriptive labels for control-by-event programming; uses five detector addresses.
- Uses patented particle separator and field-replaceable filter to remove contaminants.
- Advanced algorithms reject common nuisance conditions
- FSA-5000 covers 5,000 square feet through one pipe.
- FSA-8000 covers 8,000 square feet through one pipe.
- FSA-20000 covers 28,800 square feet through one to four pipes.

### **FCO-851 INTELLIQUAD™ PLUS ADVANCED MULTI-CRITERIA FIRE/CO DETECTOR**

- Detects all four major elements of a fire.
- Separate signal for life-safety CO detection.
- Optional addressable sounder base for Temp-3 (fire) or Temp-4 (CO) tone.
- Automatic drift compensation of smoke sensor and CO cell.
- High nuisance-alarm immunity.

### **SWIFT WIRELESS**

- Self-healing mesh wireless protocol.
- Each SWIFT Gateway supports up to 50 devices: 1 wireless gateway and up to 49 SWIFT devices.
- Up to 4 wireless gateways can be installed with overlapping network coverage.

### **RELEASING FEATURES**

- Ten independent hazards.
- Sophisticated cross-zone (three options).
- Delay timer and Discharge timers (adjustable).
- Abort (four options).
- Low-pressure CO<sub>2</sub> listed.

### **DIGITAL VOICE AND TELEPHONE FEATURES**

- Up to eight channels of digital audio.
- 35, 50, 75, and 100/125 watt digital amplifiers (DAA2/DAX series and DS series; NCA-2 required as primary display).
- Solid-state digital message generation.
- Firefighter telephone option.
- 30- to 120-watt high-efficiency amplifiers (AA Series).
- Backup tone generator and amplifier option.
- NFS2-640 can also integrate with the FirstCommand Emergency Communications System. See DN-60772.

### **HIGH-EFFICIENCY OFFLINE SWITCHING 3.0 A POWER SUPPLY (6.0 A IN ALARM)**

- 120 VAC (NFS2-640); 240 VAC (NFS2-640E).
- Displays battery current/voltage on panel (with display).

## **FlashScan, Exclusive World-Leading Detector Protocol**

At the heart of the NFS2-640 is a set of detection devices and device protocol — FlashScan (U.S. Patent 5,539,389). FlashScan is an all-digital protocol that gives superior precision and high noise immunity.

In addition to providing quick identification of an active input device, this protocol can also activate many output devices in a fraction of the time required by competitive protocols. This high speed also allows the NFS2-640 to have the largest device per loop capacity in the industry — 318 points — yet every input and output device is sampled in less than two sec-

onds. The microprocessor-based FlashScan detectors have bicolor LEDs that can be coded to provide diagnostic information, such as device address during Walk Test.

## **ONYX Intelligent Sensing**

Intelligent sensing is a set of software algorithms that provides the NFS2-640 with industry-leading smoke detection capability. These complex algorithms require many calculations on each reading of each detector, and are made possible by the high-speed microcomputer used by the NFS2-640.

**Drift Compensation and Smoothing:** Drift compensation allows the detector to retain its original ability to detect actual smoke, and resist false alarms, even as dirt accumulates. It reduces maintenance requirements by allowing the system to automatically perform the periodic sensitivity measurements required by NFPA 72. Smoothing filters are also provided by software to remove transient noise signals, such as those caused by electrical interference.

**Maintenance Warnings:** When the drift compensation performed for a detector reaches a certain level, the performance of the detector may be compromised, and special warnings are given. There are three warning levels: (1) Low Chamber value; (2) Maintenance Alert, indicative of dust accumulation that is near but below the allowed limit; (3) Maintenance Urgent, indicative of dust accumulation above the allowed limit.

**Sensitivity Adjust:** Nine sensitivity levels are provided for alarm detection. These levels can be set manually, or can change automatically between day and night. Nine levels of pre-alarm sensitivity can also be selected, based on predetermined levels of alarm. Pre-alarm operation can be latching or self-restoring, and can be used to activate special control functions.

**Self-Optimizing Pre-Alarm:** Each detector may be set for “Self-Optimizing” pre-alarm. In this special mode, the detector “learns” its normal environment, measuring the peak analog readings over a long period of time, and setting the pre-alarm level just above these normal peaks.

**Cooperating Multi-Detector Sensing:** A patented feature of ONYX intelligent sensing is the ability of a smoke sensor to consider readings from nearby sensors in making alarm or pre-alarm decisions. Without statistical sacrifice in the ability to resist false alarms, it allows a sensor to increase its sensitivity to actual smoke by a factor of almost two to one.

## **Field Programming Options**

**Autoprogram** is a timesaving feature. The FACP “learns” what devices are physically connected and automatically loads them in the program with default values for all parameters. Requiring less than one minute to run, this routine allows the user to have almost immediate fire protection in a new installation, even if only a portion of the detectors are installed.

**Keypad Program Edit (with KDM-R2)** The NFS2-640, like all NOTIFIER intelligent panels, has the exclusive feature of program creation and editing capability from the front panel keypad, while continuing to provide fire protection. The architecture of the NFS2-640 software is such that each point entry carries its own program, including control-by-event links to other points. This allows the program to be entered with independent per-point segments, while the NFS2-640 simultaneously monitors other (already installed) points for alarm conditions.

VeriFire® Tools is an offline programming and test utility that can greatly reduce installation programming time, and increase confidence in the site-specific software. It is Windows®-based and provides technologically advanced capabili-

ties to aid the installer. The installer may create the entire program for the NFS2-640 in the comfort of the office, test it, store a backup file, then bring it to the site and download from a laptop into the panel.

## Placement of Equipment in Chassis and Cabinet

The following guidelines outline the NFS2-640's flexible system design.

**Rows:** The first row of equipment in the cabinet mounts in the chassis shipped with the FACP. Mount the second, third, or fourth rows of equipment in a CHS-4 series chassis or, for Digital Voice Command products, in CA-1 or CA-2. (For DVC-EM and DAA2/DAX components see *DVC Manual*; for DS series components see *DS-AMP Manual*; for DVC-AO applications, see *AA Series Installation Manual*). Other options are available; see your panel's installation manual.

**Wiring:** When designing the cabinet layout, consider separation of power-limited and non-power-limited wiring as discussed in the *NFS2-640 Installation Manual*.

**Positions:** A chassis offers four basic side-by-side positions for components; the number of modules that can be mounted in each position depends on the chassis model and the size of the individual module. There are a variety of standoffs and hardware items available for different combinations and configurations of components.

It is critical that all mounting holes of the NFS2-640 are secured with a screw or standoff to ensure continuity of Earth Ground.

**Layers:** The control panel's chassis accepts four layers of equipment, including the control panel. The CPU2-640 fills three positions (left to right) in the first-installed layer (the back of the chassis); its integral power supply occupies the center two positions in the next two layers; the optional display occupies (the left) two positions at the front, flush with the door. Some equipment, such as the NCA-2, may be mounted in the dress panel directly in front of the control panel. The NCA-2 can be used as a primary display for the NFS2-640 (use NCA/640-2-KIT) by directly connecting their network ports (required in Canadian stand-alone applications); see NCA-2 data sheet for mounting options (*DN-7047*).

**Expansion:** Installing an LEM-320 Loop Expander Module adds a second SLC loop to the control panel. The LEM-320 is mounted onto the CPU2-640, occupying the middle-right, second (back) slot on the chassis.

**Networking:** If networking two or more control panels, each unit requires a Network Communication Module or High-Speed Network Communication Module. (HS-NCM can support two nodes; see "Networking Options" on page 5). These modules can be installed in any option board position (see manual), and additional option boards can be mounted in front of the network communication modules.

## KDM-R2 Controls and Indicators

**Program Keypad:** QWERTY type (*keyboard layout, see figure*).

**12 LED indicators:** Power; Fire Alarm; Pre-Alarm; Security; Supervisory; System Trouble; Signals Silenced; Points Disabled; Control Active; Abort; Pre-Discharge; Discharge.

**Keypad Switch Controls:** Acknowledge/Scroll Display; Signal Silence; Drill; System Reset; Lamp Test.

**LCD Display:** 80 characters (2 x 40) with long-life LED backlight.

## Product Line Information

- "Configuration Guidelines" on page 4
- "Networking Options" on page 5
- "Auxiliary Power Supplies and Batteries" on page 5
- "Audio Options" on page 5
- "Compatible Devices, EIA-232 Ports" on page 5
- "Compatible Devices, EIA-485 Ports" on page 5
- "Compatible Intelligent Devices" on page 6
- "Enclosures, Chassis, and Dress Plates" on page 7
- "Other Options" on page 7

### CONFIGURATION GUIDELINES

*Stand-alone and network systems require a main display. On systems with one FACP (one CPU2-640/-640E), display options are the KDM-R2 or the NCA-2. On network systems (two or more networked fire panel nodes), at least one NCA-2, NCS, or ONYXWorks annunciation device is required. Other options listed as follows;*

**KDM-R2:** 80-character backlit LCD display with QWERTY programming and control keypad. Order two BMP-1 blank modules and DP-DISP2 mounting plate separately. *Requires top row of a cabinet. Required for each stand-alone 80-character display system. The KDM-R2 may mount in network nodes to display "local" node information as long as at least one NCA-2 or NCS/ONYXWorks network display is on the system to display network information. (Non-English versions also available: KDM-R2-FR, KDM-R2-PO, KDM-R2-SP.)*

**NCA-2:** Network Control Annunciator, 640 characters. On single CPU2-640/-640E systems, the optional NCA-2 can be used as the Primary Display for the panel and connects directly to the CPU2-640/-640E. On network systems (two or more networked fire panel nodes), one network display (either NCA-2 or NCS/ONYXWorks) is required for every system. On network systems, the NCA-2 connects to (and requires) a standard Network Communication Module or High-Speed Network Communication Module. Mounts in a row of FACP node or in two annunciator positions. Mounting options include the DP-DISP2, ADP-4B, or in an annunciator box, such as the ABS-2D. In CAB-4 top-row applications, a DP-DISP2 and two BMP-1 blank modules are required for mounting. Required for NFS2-640 applications employing the DVC-EM with DAL devices. Non-English versions are available. For marine applications, order NCA-2-M; for non-English Marine applications, order NCA-2-M and the appropriate KP-KIT-XX. See *DN-7047*.

**CPU2-640:** Central processing unit (CPU) with integral 3.0 A (6.0 A in alarm) power supply for an NFS2-640 system. Includes control panel factory-mounted on a chassis; one Signaling Line Circuit expandable to two; documentation kit. *Order one per system or as necessary (up to 103 network nodes) on a network system. (Non-English versions also available: CPU2-640-FR, CPU2-640-PO, CPU2-640-SP.)*

**CPU2-640E:** Same as CPU2-640 but requires 240 VAC, 1.5 A, (3.0 A in alarm). *(Non-English versions also available: CPU2-640E-PO, CPU2-640E-SP.)*

**NCA/640-2-KIT:** Bracket installation kit required to mount NCA-2 to the CPU2-640/-640E's standard chassis.

**DP-DISP2:** Dress panel for top row in cabinet with CPU2-640/640E installed.

**ADP2-640:** Dress panel for middle rows with CPU2-640/640E.

**BMP-1:** Blank module for unused module positions.

**BP2-4:** Battery plate, required.

**LEM-320:** Loop Expander Module. Expands each NFS2-640 to two Signaling Line Circuits. See *DN-6881*.

## NETWORKING OPTIONS

**NCM-W, NCM-F:** Standard Network Communications Modules. Wire and multi-mode fiber versions available. See *DN-6861*.

**HS-NCM-W/MF/SF/WMF/WSF/MFSF:** High-speed Network Communications Modules that can connect to two nodes. Wire, single-mode fiber, multi-mode fiber, and media conversion models are available. See *DN-60454*.

**RPT-W, RPT-F, RPT-WF:** Standard-network repeater board with wire connection (RPT-W), multi-mode fiber connection (RPT-F), or allowing a change in media type between wire and fiber (RPT-WF). Not used with high-speed networks. See *DN-6971*.

**ONYXWorks:** UL-listed graphics PC workstation, software, and computer hardware. See *DN-7048* for specific part numbers.

**NFN-GW-EM-3:** NFN Gateway, embedded. (Replaces NFN-GW-EM.) See *DN-60499*.

**NWS-3: NOTI•FIRE•NET™** Web Server. See *DN-6928*.

**CAP-GW:** Common Alerting Protocol Gateway. See *DN-60756*.

**VESDA-HLI-GW:** VESDAnet high-level interface gateway. See *DN-60753*.

**LEDSIGN-GW:** UL-listed sign gateway. Interfaces with classic and high-speed NOTI•FIRE•NET networks through the NFN Gateway. See *DN-60679*.

**OAX2-24V:** UL-listed LED sign, used with LEDSIGN-GW. See *DN-60679*.

## AUXILIARY POWER SUPPLIES AND BATTERIES

**ACPS-610:** 6.0 A or 10.0 A addressable charging power supply. See *DN-60244*.

**APS2-6R:** Auxiliary Power Supply. Provides up to 6.0 amperes of power for peripheral devices. Includes battery input and transfer relay, and overcurrent protection. Mounts on two of four positions on a CHS-4L or CHS-4 chassis. See *DN-5952*.

**FCPS-24S6/S8:** Remote 6 A and 8 A power supplies with battery charger. See *DN-6927*.

**BAT Series:** Batteries. NFS2-640 uses two 12 volt, 18 to 200 AH batteries. See *DN-6933*.

## AUDIO OPTIONS

**NOTE:** For mounting hardware, see "Enclosures, Chassis, and Dress Plates" on page 7 and peripheral data sheets.

**DVC-EM:** Digital Voice Command, digital audio processor with message storage for up to 32 minutes of standard quality (4 minutes at high quality) digital audio. Capable of playing up to eight simultaneous messages when used with Digital Audio Loop (DAL) devices. See *DN-7045*.

**DVC-RPU:** Digital Voice Command Remote Paging Unit for use with DVC-EM. Includes the keypad/display. See *DN-60726*.

**DS-DB:** Digital Series Distribution Board, provides bulk amplification capabilities to the DVC-EM while retaining digital audio distribution capabilities. Can be configured with up to four DS-AMPs, supplying high-level risers spread throughout an installation. See *DN-60565*.

**DVC-KD:** DVC-EM keypad for local annunciation and controls; status LEDs and 24 user-programmable buttons. See *DN-7045*.

**DS-AMPE:** 125W, 25 VRMS, or 100W, 70VRMS. 70VRMS requires DS-XF70V step-up transformer. Digital Series Amplifier, part of the DS-DB system. See *DN-60663*.

**DS-RFM, DS-FM, DS-SFM:** Fiber conversion modules for DVC-EM, DS-DB distribution board, and DAX and DAA2 Series amplifiers. See *DN-60633*.

**DVC-AO:** DVC Analog Output board provides four analog output circuits for use with AA Series amplifiers. Four-channel operation supported. See *DN-7045*.

**DAA2-5025(E):** 50W, 25 Vrms Digital Audio Amplifier assembly with power supply; includes chassis. See *DN-60556*.

**DAA2-5070(E):** 50W, 70.7 Vrms Digital Audio Amplifier assembly with power supply; includes chassis. See *DN-60556*.

**DAA2-7525(E):** 75W, 25 Vrms digital audio amplifier assembly with power supply; includes chassis. See *DN-60556*.

**DAX-3525(E):** 35W, 25 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. See *DN-60561*.

**DAX-3570(E):** 35W, 70.7 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. See *DN-60561*.

**DAX-5025(E):** 50W, 25 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. See *DN-60561*.

**DAX-5070(E):** 50W, 70.7 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. See *DN-60561*.

**TELH-1:** Firefighter's Telephone Handset for use with the DVC-EM when mounted in the CA-2 chassis. See *DN-7045*.

**CMIC-1:** Optional microphone and microphone well assembly used with the CA-1 chassis.

**RM-1/RM-1SA:** Remote microphone assemblies, mount on ADP-4 (RM-1) dress panel or CAB-RM/RMR (RM-1SA) stand-alone cabinets. See *DN-6728*.

**AA-30:** Audio Amplifier, 30 watts, 25 Vrms. Includes amplifier and audio input supervision, backup input, and automatic switchover, power supply, cables. See *DN-3224*.

**AA-120/AA-100:** Audio Amplifier provides up to 120 watts of 25 VRMS audio power for the NFS-640. The amplifier contains an integral chassis for mounting to a CAB-B4, -C4, or -D4 backbox (consumes one row). Switch-mode power. Includes audio input and amplified output supervision, backup input, and automatic switchover to backup tone. Order the AA-100 for 70.7 VRMS systems and 100 watts of power. See *DN-3224*.

**DAA Series Digital Audio Amplifiers:** Legacy DAA Series amplifiers are compatible with DVC-EM systems running SR4.0. For specific information on DAA-50 series amplifiers, refer to *DN-7046*. For information on DAA-7525 Series, refer to *DN-60257*.

**NFC-25/50:** 25 watt, 25 VRMS, emergency Voice Evacuation Control Panel (VECP) with integral commercial microphone, digital message generator, and single-/dual-channel Class A or Class B speaker circuits. See *DN-60772*.

## COMPATIBLE DEVICES, EIA-232 PORTS

**PRN-6:** 80-column printer. See *DN-6956*.

**PRN-7:** 80-column printer. See *DN-60897*.

**VS4095/5:** Printer, 40-column, 24V. Mounted in external backbox. See *DN-3260*.

**DPI-232:** Direct Panel Interface, specialized modem for extending serial data links to remotely located FACPs and/or peripherals. See *DN-6870*.

## COMPATIBLE DEVICES, EIA-485 PORTS

**ACM-24AT:** ONYX Series ACS annunciator – up to 96 points of annunciation with Alarm or Active LED, Trouble LED, and switch per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) by point to be red, green, or yellow; the Trouble LED is always yellow. See *DN-6862*.

**AEM-24AT:** Same LED and switch capabilities as ACM-24AT, expands the ACM-24AT to 48, 72, or 96 points. See *DN-6862*.

**ACM-48A:** ONYX Series ACS annunciator – up to 96 points of annunciation with Alarm or Active LED per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) in groups of 24 to be red, green, or yellow. Expandable to 96 points with one AEM-48A. See *DN-6862*.

**AEM-48A:** Same LED capabilities as ACM-48A, expands the ACM-48A to 96 points. See *DN-6862*.

**ACM-8R:** Remote Relay Module with eight Form-C contacts. Can be located up to 6,000 ft. (1828.8 m) from panel on four wires. See *DN-3558*.

**FDU-80:** Terminal mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. See *DN-6820*.

**LCD2-80:** Terminal and ACS mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. See *DN-60548*.

**LDM:** Lamp Driver Modules LDM-32, LDM-E32, and LDM-R32; remote custom graphic driver modules. See *DN-0551*.

**SCS:** Smoke control stations SCS-8, SCE-8, with lamp drivers SCS-8L, SCE-8L; eight (expandable to 16) circuits (HVAC only). See *DN-4818*.

**TM-4:** Transmitter Module. Includes three reverse-polarity circuits and one municipal box circuit. Mounts in panel module position (single-address-style) or in CHS2-M2 position. See *DN-6860*.

**UDACT-2:** Universal Digital Alarm Communicator Transmitter, 636 channel. See *DN-60686*.

**UZZ-256:** Programmable Universal Zone Coder provides positive non-interfering successive zone coding. Microprocessor-controlled, field-programmable from IBM®-compatible PCs (requires optional programming kit). Up to 256 programmable codes. Mounts in **BB-UZZ** or other compatible chassis (purchased separately). See *DN-3404*.

#### **COMPATIBLE INTELLIGENT DEVICES**

**FWSG Wireless SWIFT Gateway:** Addressable gateway supports wireless SLC devices. Not appropriate for ULC applications. See *DN-60820*.

**FSA-5000:** Intelligent FFAST® XS Fire Alarm Aspiration Sensing Technology. Intelligent aspirating smoke detector for applications up to 5,000 sq.ft. For Canadian applications, order FSA-5000A.

**FSA-8000:** Intelligent FFAST® XM Fire Alarm Aspiration Sensing Technology. Intelligent aspirating smoke detector for applications up to 8,000 sq.ft. For Canadian applications, order FSA-8000A. See *DN-60792*.

**FSA-20000:** Intelligent FFAST® XT Fire Alarm Aspiration Sensing Technology. Intelligent aspirating smoke detector for applications up to 28,800 sq.ft. For Canadian applications, order FSA-20000A. See *DN-60849*.

**FSB-200:** Intelligent beam smoke detector. See *DN-6985*.

**FSB-200S:** Intelligent beam smoke detector with integral sensitivity test. See *DN-6985*.

**FSC-851:** FlashScan IntelliQuad Advanced Multi-Criteria Detector. See *DN-60412*.

**FCO-851:** FlashScan IntelliQuad PLUS Advanced Multi-Criteria Fire/CO Detector. See *DN-60689*.

**FSI-851:** Low-profile FlashScan ionization detector. See *DN-6934*.

**FSP-851:** Low-profile FlashScan photoelectric detector. See *DN-6935*.

**FSP-851T:** FSP-851 plus dual electronic thermistors that add 135°F (57°C) fixed-temperature thermal sensing. See *DN-6935*.

**FSP-851R:** FSP-851, remote-test capable. For use with DNR(W). See *DN-6935*.

**FST-851:** FlashScan thermal detector 135°F (57°C). See *DN-6936*.

**FST-851R:** FlashScan thermal detector 135°F (57°C) with rate-of-rise. See *DN-6936*.

**FST-851H:** FlashScan 190°F (88°C) high-temperature thermal detector. See *DN-6936*.

**FAPT-851:** FlashScan Acclimate Plus low-profile multi-sensor detector. See *DN-6937*.

**FSL-751:** FlashScan VIEW laser photo detector. See *DN-6886*.

**DNR:** InnovairFlex low-flow non-relay duct-detector housing (order FSP-851R separately). Replaces FSD-751PL/FSD-751RPL. See *DN-60429*.

**DNRW:** Same as above with NEMA-4 rating, watertight. See *DN-60429*.

**B224RB:** Low-profile relay base. See *DN-60054*.

**B224BI:** Isolator base for low-profile detectors. See *DN-60054*.

**B210LP:** Low-profile base. Standard U.S. style. Replaces B710LP. See *DN-60054*.

**B501:** European-style, 4" (10.16 cm) base. See *DN-60054*.

**B200S:** Intelligent programmable sounder base, capable of producing a variety of tone patterns including ANSI Temporal 3. Compatible with synchronization protocol. See *DN-60054*.

**B200S-LF:** Low-frequency version of B200S. See *DN-60054*.

**B200SCOA:** Based on B200SA, with added CO detector markings in English/French. For Canadian applications only.

**B200SR:** Sounder base, Temporal 3 or Continuous tone. See *DN-60054*.

**B200SR-LF:** Low-frequency version of B200SR. See *DN-60054*.

**FMM-1:** FlashScan monitor module. See *DN-6720*.

**FDM-1:** FlashScan dual monitor module. See *DN-6720*.

**FZM-1:** FlashScan two-wire detector monitor module. See *DN-6720*.

**FMM-101:** FlashScan miniature monitor module. See *DN-6720*.

**FTM-1:** Firephone Telephone Module connects a remote firefighter telephone to a centralized telephone console. Reports status to panel. Wiring to jacks and handsets is supervised. See *DN-6989*.

**FCM-1:** FlashScan control module. See *DN-6720*.

**FCM-1-REL:** FlashScan releasing control module. See *DN-60390*.

**FRM-1:** FlashScan relay module. See *DN-6720*.

**FDRM-1:** FlashScan dual monitor/dual relay module. See *DN-60709*.

**NBG-12LX:** Manual pull station, addressable. See *DN-6726*.

**ISO-X:** Isolator module. See *DN-2243*.

**ISO-6:** Six Fault isolator module. For Canadian applications order ISO-6A. See *DN-60844*.

**XP6-C:** FlashScan six-circuit supervised control module. See *DN-6924*.



**XP6-MA:** FlashScan six-zone interface module; connects intelligent alarm system to two-wire conventional detection zone. See *DN-6925*.

**XP6-R:** FlashScan six-relay (Form-C) control module. See *DN-6926*.

**XP10-M:** FlashScan ten-input monitor module. See *DN-6923*.

**SLC-IM:** SLC integration module, for VESDAnet detectors. See *DN-60755*.

### ENCLOSURES, CHASSIS, AND DRESS PLATES

**CAB-4 Series Enclosure:** NFS2-640 mounts in a standard CAB-4 Series enclosure (available in four sizes, "A" through "D"). Backbox and door ordered separately; requires BP2-4 battery plate. A trim ring option is available for semi-flush mounting. See *DN-6857*.

**EQ Series Cabinets:** EQ series cabinets will house amplifiers, power supplies, battery chargers and control modules. EQ cabinets are available in three sizes, "B" through "D". See *DN-60229*.

**CAB-BM Marine System:** Protects equipment in shipboard and waterfront applications. Also order **BB-MB** for systems using 100 AH batteries. For a full list of required and optional equipment, see *DN-60688*.

**CHS-4:** Chassis for mounting up to four APS-6Rs.

**CHS-4L:** Low-profile four-position Chassis. Mounts two AA-30 amplifiers or one AMG-E and one AA-30.

**DP-1B:** Blank dress panel. Provides dead-front panel for unused tiers; covers DAA2/DAX series or AA-series amplifier.

**NFS-LBB:** Battery Box (required for batteries larger than 26 AH).

**NFS-LBBR:** Same as above but red.

**CHS-BH1:** Battery chassis; holds two 12.0 AH batteries. Mounts one the left side of DAA2 chassis. See *DN-7046*.

**CA-1:** Chassis, occupies one tier of a CAB-4 Series enclosure. The left side accommodates one DVC-EM and a DVC-KD (optional); and the right side houses a CMIC-1 microphone and its well (optional). See *DN-7045*.

**CA-2:** Chassis assembly, occupies two tiers of a CAB-4 Series enclosure. The left side accommodates one DVC-EM mounted on a half-chassis and one NCA-2 mounted on a half-chassis. The right side houses a microphone/handset well. The CA-2 assembly includes CMIC-1 microphone. ADDR Series doors with two-tier visibility are available for use with the CA-2 configuration: ADDR-B4, ADDR-C4, ADDR-D4 (below).

**CFFT-1:** Chassis to mount firefighter's telephone and one ACS annunciator in a CAB-4 row. Includes TELH-1 firefighter's handset for the DVC-EM, chassis, phone well and mounting hardware. Order DP-CFFT dress panel separately.

**DP-CFFT:** CFFT-1 dress panel. Requires BMP-1 if no ACS annunciator is installed.

**ADDR-B4\*:** Two-tier-sized door designed for use with the CA-2 chassis configuration. ADDR Series doors are similar to CAB-4 Series "DR" doors, but a clear window space exposes the top two tiers of the CAB-4 enclosure. Use an SBB-B4 backbox with the ADDR-B4. See *DN-7045, DN-6857*.

**ADDR-C4\*:** Three-tier-sized door, designed for use with the CA-2 chassis configuration. ADDR Series doors are similar to CAB-4 Series "DR" doors, but a clear window space exposes the top two tiers of the CAB-4 enclosure. Use an SBB-C4 backbox with the ADDR-C4. See *DN-7045, DN-6857*.

**ADDR-D4\*:** Four-tier-sized door designed for use with the CA-2 chassis configuration. ADDR Series doors are similar to CAB-4 Series "DR" doors, but a clear window space exposes

the top two tiers of the CAB-4 enclosure. Use an SBB-D4 backbox with the ADDR-D4. See *DN-7045, DN-6857*.

\*Use ADDR-B4/C4/D4 when CA-2 chassis is installed in top two rows with NCA-2 or BP-CA2. Use standard door when CA-2 is not installed in top two rows. For additional configuration information, see the DVC application guide on <http://esd.notifier.com>.

**DPA-1:** Dress panel, used with the CA-1 chassis when configured with a DVC-EM, DVC-KD, and CMIC-1. See *DN-7045*.

**DPA-2B:** Dress panel used with CA-2 chassis assembly.

**VP-2B:** Dress panel, required when CA-2 chassis is installed in the top two cabinet rows.

**DPA-1A4:** Dress panel, used with the CA-1 chassis when the CMIC-1 is not used. Provides mounting options on right two bays for two ACS annunciators, or for blank plates. See *DN-7045*.

**BP-CA2:** Blank plate for CA-2 chassis.

**BB-UZC:** Backbox for housing the UZC-256 in applications where the UZC-256 will not fit in panel enclosure. Black; for red, order BB-UZC-R.

**SEISKIT-CAB:** Seismic mounting kit. Required for seismic-certified applications with NFS2-640 and other equipment mounted in CAB-4 Series Enclosures. Includes battery bracket for two 26 AH batteries.

**SEISKIT-LBB:** Seismic kit for the NFS-LBB. Includes battery bracket for two 55 AH batteries.

### OTHER OPTIONS

**411:** Slave digital alarm communicator. See *DN-6619*.

**411UDAC:** Digital alarm communicator. See *DN-6746*.

**IPDACT-2/2UD, IPDACT Internet Monitoring Module:** Connects to primary and secondary DACT telephone output ports for internet communications over customer-provided Ethernet connection. Requires compatible Teldat VisorALARM Central Station Receiver. Can use DHCP or static IP. See *DN-60408*.

**IPCHSKIT:** IP Communicator Chassis Mounting Kit. For mounting an IPDACT-2/2UD onto the panel chassis or CHS-4 series chassis. Use IPENC for external mounting applications.

**IPSPLT:** Y-adaptor option allow connection of both panel dialer outputs to one IPDACT-2/2UD cable input.

**IPENC:** External enclosure for IPDACT, includes IPBRKT mounting bracket; Red. For Black order IPENC-B.

**IPGSM-4G:** Internet and Digital Cellular Fire Alarm Communicator. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. For Canadian applications order IPGSM-4GC. See *DH-60769*.

**NOTE:** For other options including compatibility with retrofit equipment, refer to the panel's installation manual, the SLC manual, and the Device Compatibility Document.

## System Specifications

### SYSTEM CAPACITY

- Intelligent Signaling Line Circuits ..... 1 expandable to 2
- Intelligent detectors ..... 159 per loop
- Addressable monitor/control modules ..... 159 per loop
- Programmable software zones ..... 99
- Special programming zones ..... 14
- LCD annunciators per CPU2-640/-640E and NCA-2 (*observe power*) ..... 32
- ACS annunciators per CPU2-640/-640E ..... 32 addresses x 64 points

- ACS annunciators per NCA-2..... 32 addresses x 64 or 96 points

**NOTE:** The NCA-2 supports up to 96 annunciator address points per ACM-24AT/-48A.

**ELECTRICAL SPECIFICATIONS**

- Primary input power:
  - CPU2-640 board: 120 VAC, 50/60 Hz, 5.0 A.
  - CPU2-640E board: 220/240 VAC, 50/60 Hz, 2.5 A.
- Current draw (standby/alarm):
  - CPU2-640(E) board: 0.250 A. Add 0.035 A for each NAC in use.
  - KDM-R2: 0.100 A.
  - LEM-320: 0.100 A.
- Total output 24 V power: 6.0 A in alarm.

**NOTE:** The power supply has a total of 6.0 A. of available power. This is shared by all internal circuits. See Installation Manual for a complete current draw calculation sheet.

- Standard notification circuits (4): 1.5 A each.
- Resettable regulated 24V power: 1.25 A.
- Two non-resettable regulated 24V power outputs:
  - 1.25 A.
  - 0.50 A.
- Non-resettable 5V power: 0.15 A.
- Battery charger range: 18 AH – 200 AH. Use separate cabinet for batteries over 26 AH.
- Float rate: 27.6 V.

**CABINET SPECIFICATIONS**

- Systems can be installed in CAB-4 Series cabinets (*four sizes with various door options, see DN-6857*). Requires BP2-4 Battery Plate.

**SHIPPING WEIGHT**

- CPU2-640/-640: 14.3 lb (6.49 kg).
- CPU2-640/-640E: 14.55 lb (6.60 kg).

**TEMPERATURE AND HUMIDITY RANGES**

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

**AGENCY LISTINGS AND APPROVALS**

The listings and approvals below apply to the basic NFS2-640 control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL Listed:** S635.
- **ULC Listed:** S635.
- **FM Approved.**
- **MEA:** 128-07-E.
- **Fire Dept. of New York:** #6121.
- **CSFM:** 7165-0028:0243.
- **City of Chicago.**

- **City and County of Denver.**
- **CCCCF listed.**

**Marine Applications:** Marine approved systems must be configured using components itemized in this document. (See Main System Components, in "Product Line Information.") Specific connections and requirements for those components are described in the installation document, PN 54756. When these requirements are followed, systems are approved by the following agencies:

- **US Coast Guard** 161.002/50/0, 161.002/55/0 (Standard 46 CFR and 161.002).
- **Lloyd's Register** 11/600013 (ENV 3 category).
- **American Bureau of Shipping** (ABS) Type Approval.

**NOTE:** For information on marine applications, see DN-60688.

**STANDARDS**

The NFS2-640 complies with the following UL Standards and NFPA 72, International Building Code (IBC), and California Building Code (CBC) Fire Alarm Systems requirements:

- **UL 864, 9th Edition** (Fire).
- **UL 1076** (Burglary).
- **UL 2572** (Mass Notification Systems). (NFS2-640 version 20 or higher.)
- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires TM-4).
- **REMOTE STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (requires TM-4).
- **PROPRIETARY** (Automatic, Manual and Waterflow). *Not applicable for FM.*
- **EMERGENCY VOICE/ALARM.**
- **OT, PSDN** (Other Technologies, Packet-switched Data Network).
- **IBC 2012, IBC 2009, IBC 2006, IBC 2003, IBC 2000** (Seismic).
- **CBC 2007** (Seismic).

IntelliQuad™, NOTI•FIRE•NET™, ONYXWorks™, and SWIFT™ are trademarks; and Acclimate® Plus™, FirstCommand®, FlashScan®, Intelligent FAAST®, NOTIFIER®, ONYX®, VeriFire® Tools, and VIEW® are registered trademarks of Honeywell International Inc. Microsoft® and Windows® are registered trademarks of Microsoft Corporation. IBM® is a registered trademark of IBM Corporation. ©2016 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.



For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118. [www.notifier.com](http://www.notifier.com)

# NFS2-3030 Intelligent Addressable Fire Alarm Control Panel

## General

The NFS2-3030 is an intelligent Fire Alarm Control Panel (FACP) designed for medium- to large-scale facilities. Fire emergency detection and evacuation are extremely critical to life safety, and the NFS2-3030 is ideally suited for these applications. The NFS2-3030 is part of the ONYX® Series of products from NOTIFIER. The NFS2-3030 is ideal for virtually any application because it features a modular design that is configured per project requirements. With one to ten Signaling Line Circuits (SLCs), the NFS2-3030 supports up to 3,180 intelligent addressable devices.


Information is critical to fire evacuation personnel, and the NFS2-3030's large 640-character Liquid Crystal Display (LCD) presents vital information to operators concerning a fire situation, fire progression, and evacuation details.

A host of other options are available, including single- or multi-channel voice; firefighter's telephone; LED, LCD, or PC-based graphic annunciators; networking; advanced detection products for challenging environments; wireless fire protection; and many additional options.

ONYX® Series panels integrate with the Connected Life Safety Services (CLSS) platform through the CLSS Gateway, providing connectivity to central station, cloud, and mobile applications. (See *HON-62034*.) This cloud-based functionality provides reliable protection and remote monitoring of the system, reduced manual data entry, and reporting.

## Features

- Certified for seismic applications when used with the appropriate seismic mounting kit.
- Approved for Marine applications when a marine-listed version is used with marine-listed compatible equipment. See *DN-60688*.
- Complies with UL 2572 Mass Notification Systems (NFS2-3030 version 20 or higher).
- One to ten isolated intelligent Signaling Line Circuits (SLC) Class A, B, or X.
- Wireless fire protection using SWIFT Smart Wireless Integrated Fire Technology. See *DN-60820*.
- Up to 159 detectors and 159 modules per SLC; 318 devices per loop/3,180 per FACP or network node.
  - Detectors can be any mix of photo, thermal, or multi-sensor; wireless detectors are available for use with the FWSG(A).
  - Modules include addressable pull stations, normally open contact devices, two-wire smoke detectors, notification, or relay; wireless modules are available for use with the FWSG(A).
- Large 16 line, 640 character LCD backlit display or use display-less as a network node.
- Network options:
  - High-speed network for up to 200 nodes (N16e/x, NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCD, NCA-2, DVC-EM, ONYXWorks, NFS-3030, NFS-640, and NCA).
  - Standard network for up to 103 nodes (N16e/x, NFS2-3030, NFS2-640, NFS-320(C), NFS-320SYS, NCD, NCA-2, DVC-EM, ONYXWorks, NCS, NFS-3030, NFS-640, NCA, AFP-200, AFP-300/400, AFP-1010, and AM2020). Up to 54 nodes when DVC-EM is used in network paging.
- Built-in Alarm, Trouble, Security, and Supervisory relays.
- VeriFire® Tools online/offline program option.

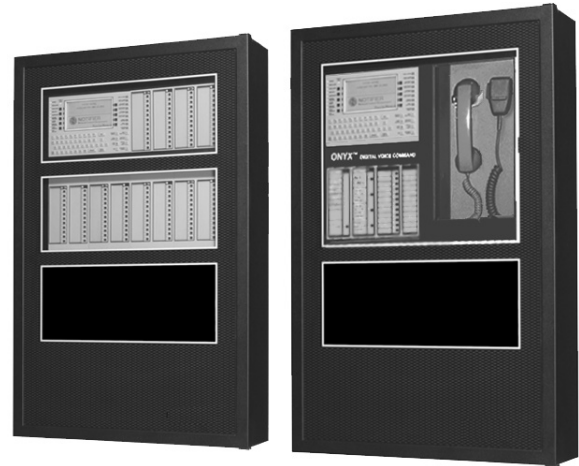

**NFS2-3030 (left) and NFS2-3030 with DVC audio option (right)**

- With built-in Degraded Mode operation, the system is capable of general alarm if a fire alarm condition is present even if the central processing unit (CPU) fails.
- Weekly Occupancy Schedules allow changing sensitivity by time of day and day of week.
- EIA-485 annunciators, including custom graphics.
- History file with 4000-event capacity in nonvolatile memory, plus separate 1000-event alarm-only file.
- Advanced history filters allow sorting by event, time, date, or address.
- Alarm Verification selection per point, with automatic counter.
- Autoprogramming and Walk Test reports.
- Multiple central station communication options:
  - Standard UDACT
  - Internet
  - Internet/GSM
- Positive Alarm Sequence (PAS) Presignal.
- Silence Inhibit and Auto Silence timer options.
- Optional cloud connectivity for remote off site monitoring through CLSS (see *HON-62034*)
- Monitor multiple buildings through one off-campus central station, and report through the CLSS Gateway
- Optional remote programming through CLSS
- Field-programmable on panel or on PC, with VeriFire Tools program, also check, compare.
- Non-alarm points for lower priority functions.
- Remote ACK/Signal Silence/System Reset/Drill via monitor modules.
- Up to 1000 powerful Boolean logic equations.
- Supports SCS Series smoke control system in both HVAC and FSCS modes.
- FM6320 approved Gas Detection System with FMM-4-20 module and any FM listed gas detector.
- EIA-232 printer port.
- EIA-485 annunciator port.

**640-CHARACTER DISPLAY FEATURES**

- Backlit, 640-character display.
- Program keypad: full QWERTY keypad.
- Up to nine users, each with a password and selectable access levels.
- **11 LED indicators:** Power; Fire Alarm; Pre-Alarm; Security; Supervisory; System Trouble; Other Event; Signals Silenced; Point Disabled; CPU Failure; Controls Active.
- **Membrane Switch Controls:** Acknowledge; Signal Silence; Drill; System Reset; Lamp Test.
- **LCD Display:** 640 characters (16 lines x 40 characters) with long-life LED backlight.

**SWIFT WIRELESS**

- Self-healing mesh wireless protocol.
- Each SWIFT Gateway supports up to 49 SWIFT devices.
- Up to 4 wireless gateways can be installed with overlapping network coverage.

**RELEASING FEATURES**

- Ten independent hazards.
- Sophisticated cross-zone (three options).
- Delay timer and Discharge timers (adjustable).
- Abort (four options).

**VOICE AND TELEPHONE FEATURES**


- Up to eight channels of digital audio.
- 35 watt, 50 watt, 75 watt, and 100/125 watt digital amplifiers (DAA2/DAX series and DS series).
- Solid state message generation.

- Hard-wired voice control module options.
- Firefighter telephone option.
- 30- to 120-watt analog amplifiers (AA Series).
- Backup tone generator and amplifier option.

**FLASHSCAN® INTELLIGENT FEATURES**

- Polls up to 318 devices on each loop in less than two seconds.
- Activates up to 159 outputs in less than five seconds.
- Multicolor LEDs blink device address during Walk Test.
- Fully digital, high-precision protocol (U.S. Patent 5,539,389).
- Manual sensitivity adjustment — up to nine levels.
- Pre-alarm ONYX intelligent sensing — up to nine levels.
- Sensitivity levels:
  - **Photo** – 0.5 to 2.35%/foot obscuration.
  - **High-Sensitivity Photoelectric (VIEW®)** – Open Air Protection (0.5% - 2.0%/ft. obscuration), Special Applications (0.02%-0.5%/ft. obscuration)
  - **Multi-Criteria Detector** – Open Air Protection (2.52-3.89%/ft. obscuration), Special Applications (1.13-2.52%/ft. obscuration)
- Drift compensation (U.S. Patent 5,764,142).
- Multi-detector algorithm involves nearby detectors in alarm decision (U.S. Patent 5,627,515).
- Automatic detector sensitivity testing (NFPA-72 compliant).
- Maintenance alert (two levels).
- Self-optimizing pre-alarm.
- Programmable activation of sounder/relay bases during alarm or pre-alarm.
- Read Status displays the level of detector cleanliness.

**Sample System Options**

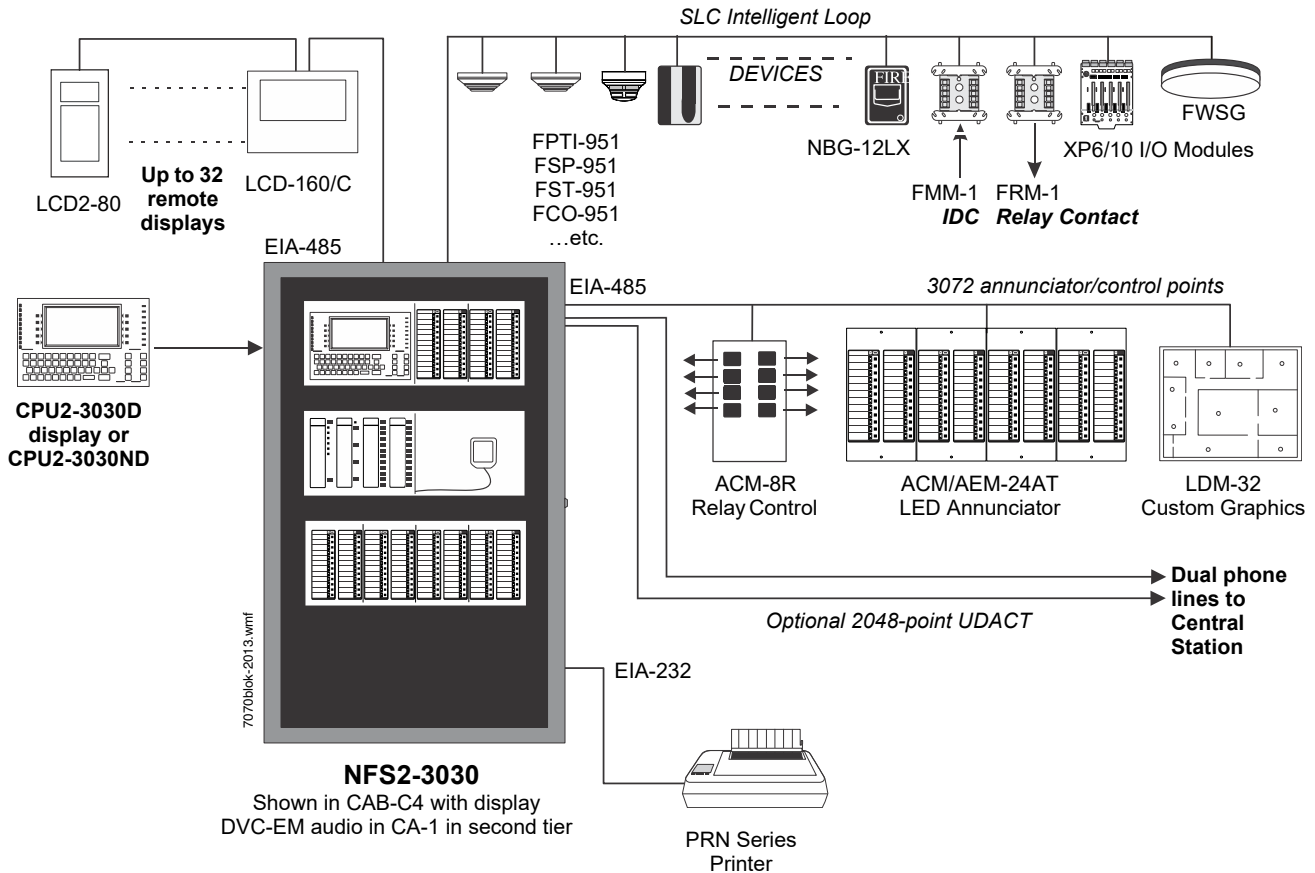

**NOTE:** CPU2-3030 firmware version 14.0 (and higher) can support LCD-160 on the RDP port, or LCD2-80 in terminal mode, but not both at the same time.

### **FSV-951 SERIES VIEW® (VERY INTELLIGENT EARLY WARNING) HIGH-SENSITIVITY SMOKE DETECTOR**

- Advanced ONYX intelligent sensing algorithms differentiate between smoke and non-smoke signals.
- Addressable operation pinpoints the fire location.
- Ivory models (-IV) support CLIP mode as well as FlashScan.
- ULC listed models available; “A” models are ULC Listed.
- -R is retrofit, backwards compatible for use with older panels.

### **FCO-951(A)-IV ADVANCED MULTI-CRITERIA FIRE/CO DETECTOR**

- Detects all four major elements of a fire (smoke, heat, CO, and flame).
- 135°F (57.2°C) fixed-temperature heat detector.
- Transmits an alarm signal due to heat.
- Separate signal for life-safety CO detection.
- Optional addressable sounder base for Temp-3 (fire) or Temp-4 (CO) tone.
- Automatic drift compensation of smoke sensor and CO cell.
- High nuisance-alarm immunity.
- ULC listed models available; “A” models are ULC Listed.

### **FPTI-951(A) INTELLIGENT MULTI-CRITERIA DETECTOR**

- Combined Photoelectric Thermal and Infrared Sensor
- UL 268 7th Edition and UL 521 Listed; Canadian models CAN/ULC S529 and CAN/ULC S530
- Microprocessor-based technology; combination photo, thermal, and infrared technology.

### **FPC-951(A) PHOTOELECTRIC/CO SENSOR**

- Combined photoelectric and carbon monoxide sensor

### **FSCO-951(A) INTELLIGENT CO SENSOR**

- Carbon monoxide sensor

### **FS-OSI-RI(A) ADDRESSABLE INTELLIGENT SINGLE-ENDED BEAM SMOKE DETECTOR**

- Intelligent addressable reflector-type linear optical beam smoke detector
- Fast, easy, and intuitive beam alignment indicated by directional LED arrows
- Long range coverage of 16-328 ft (5-100 m) is standard; no separate long-range kit required

### **FMM-4-20 GAS DETECTION MODULE**

- Interface to industry-standard linear scale 4-20 mA sensors.
- Five programmable thresholds.
- FM Approved, Class 6320 (Stationary Gas Sensors/Detectors).

### **INTELLIGENT VESDA-E DETECTORS**

- Intelligent aspiration smoke detectors connect directly to the SLC loop of compatible ONYX® Series panels:
  - VEA-040-A00-NTF, VEA-040-A10-NTF
  - VEP-A00-P-NTF, VEP-A10-P-NTF, VEP-A00-1P-NTF
  - VEU-A00-NTF, VEU-A10-NTF
  - VES-A00-P-NTF-UL, VES-A10-P-NTF-UL
- Models offer LED display, LCD display, or both
- Coverage options for spaces up to 69,965 square feet

## **FlashScan® Exclusive World-Leading Detector Protocol**

At the heart of the NFS2-3030 is a set of detection devices and device protocol — FlashScan (U.S. Patent 5,539,389). FlashScan is an all-digital protocol that gives superior precision and high noise immunity.

As well as giving quick identification of an active input device, this protocol can also activate many output devices in a fraction of the

time required by competitive protocols. This high speed also allows the NFS2-3030 to have the largest device per loop capacity in the industry — 318 points — yet every input and output device is sampled in less than two seconds. The microprocessor-based FlashScan® detectors have bicolor LEDs that can be coded to provide diagnostic information, such as device address during Walk Test.

## **ONYX Intelligent Sensing**

ONYX Intelligent Sensing is a set of software algorithms that provide the NFS2-3030 with industry-leading smoke detection capability. These complex algorithms require many calculations on each reading of each detector, and are made possible by the very high-speed microcomputer used by the NFS2-3030.

**Drift Compensation and Smoothing.** Drift compensation allows the detector to retain its original ability to detect actual smoke, and resist false alarms, even as dirt accumulates. It reduces maintenance requirements by allowing the system to automatically perform the periodic sensitivity measurements required by NFPA 72. Smoothing filters are also provided by software to remove transient noise signals, usually caused by electrical interference.

**Maintenance Warnings.** When the drift compensation performed for a detector reaches a certain level, the performance of the detector may be compromised, and special warnings are given. There are three warning levels: (1) Low Chamber value; (2) Maintenance Alert, indicative of dust accumulation that is near but below the allowed limit; (3) Maintenance Urgent, indicative of dust accumulation above the allowed limit.

**Sensitivity Adjust.** Nine sensitivity levels are provided for alarm detection. These levels can be set manually, or can change automatically between day and night. Nine levels of pre-alarm sensitivity can also be selected, based on predetermined levels of alarm. Pre-alarm operation can be latching or self-restoring, and can be used to activate special control functions.

**Self-Optimizing Pre-Alarm.** Each detector may be set for “Self-Optimizing” pre-alarm. In this special mode, the detector “learns” its normal environment, measuring the peak analog readings over a long period of time, and setting the pre-alarm level just above these normal peaks.

**Cooperating Multi-Detector Sensing.** A patented feature of ONYX Intelligent Sensing is the ability of a smoke sensor to consider readings from nearby sensors in making alarm or pre-alarm decisions. Without statistical sacrifice in the ability to resist false alarms, it allows a sensor to increase its sensitivity to actual smoke by a factor of almost two to one.

## **Field Programming Options**

**Autoprogram** is a timesaving feature. The FACP “learns” what devices are physically connected and automatically loads them in the program with default values for all parameters. Requiring less than one minute to run, this routine allows the user to have almost immediate fire protection in a new installation, even if only a portion of the detectors are installed.

**Keypad Program Edit.** The NFS2-3030, like all NOTIFIER intelligent panels, has the exclusive feature of program creation and editing capability from the front panel keypad, while continuing to provide fire protection. The architecture of the NFS2-3030 software is such that each point entry carries its own program, including control-by-event links to other points. This allows the program to be entered with independent per-point segments, while the NFS2-3030 simultaneously monitors other (already installed) points for alarm conditions.

**VeriFire® Tools** is an offline programming and test utility that can greatly reduce installation programming time, and increase confidence in the site-specific software. It is Windows® based and provides technologically advanced capabilities to aid the installer. The installer may create the entire program for the NFS2-3030 in the

comfort of the office, test it, store a backup file, then bring it to the site and download from a laptop into the panel.

## Product Line Information

- “Configuration Guidelines” on page 4
- “Main System Components” on page 4
- “Networking Options” on page 4
- “Auxiliary Power Supplies and Batteries” on page 4
- “Audio Options” on page 4
- “Compatible Devices, EIA-232 Ports” on page 5
- “Compatible Devices, EIA-485 Ports” on page 5
- “Compatible Intelligent Devices” on page 5
- “Enclosures, Chassis, and Dress Plates” on page 6
- “Backboxes” on page 7
- “Other Options” on page 7

### CONFIGURATION GUIDELINES

*Stand-alone and network systems require a main display. On single-FACP systems (one NFS2-3030D), the display option is the CPU2-3030D. On network systems (two or more networked fire panel nodes), at least one NCD, NCA-2/C, NCS, or ONYXWorks annunciation device is required. Options listed as follows.*

### MAIN SYSTEM COMPONENTS

**CPU2-3030D:** NFS2-3030 Primary Display. CPU2-3030D ships with keypad/display installed; includes 640-character backlit LCD display, QWERTY programming and control keypad. CPU2-3030 is a central processing unit and requires an AMPS-24(E) power supply. For English ULC applications, use CPU2-3030DC. Non-English versions are available: CPU2-3030D-FR, CPU2-3030D-HE, CPU2-3030D-KO, CPU2-3030D-PO, CPU2-3030D-SC, CPU2-3030D-SP, CPU2-3030D-TC, and CPU2-3030D-TH. For English Marine applications order CPU2-3030D-M; for non-English Marine applications order CPU2-3030D-M and the appropriate KP-KIT-XX. (See DN-60688.)

**CPU2-3030ND:** CPU2-3030 without display. Non-English versions are available: CPU2-3030ND-FR, CPU2-3030ND-HE, CPU2-3030ND-KO, CPU2-3030ND-PO, CPU2-3030ND-SC, CPU2-3030ND-SP, CPU2-3030ND-TC.

**AMPS-24(E):** One required for each NFS2-3030. Addressable power supply and battery charger with two 24 VDC outputs. Addressable by any FlashScan® or CLIP mode FACP. Charges 7 to 200 AH batteries. Occupies up to five addresses on an SLC, depending on configuration. Primary input power for panel. See DN-6883.

**LCM-320:** Loop Control Module. Provides one SLC. NFS2-3030 supports up to five LCM-320s and five LEM-320 expanders for a total of ten SLCs. See DN-6881.

**LEM-320:** Loop Expander Module. Expands an LCM-320. See DN-6881.

**SAMPLE SYSTEM:** Four-loop NFS2-3030 with display: CPU2-3030D, DP-DISP, two BMP-1s, CHS-M3, two LCM-320s, two LEM-320s, AMPS-24, SBB-A4, DR-A4, BP2-4, BB-100, batteries.

### NETWORKING OPTIONS

**NCA-2/C:** Network Control Annunciator, 640 characters. An alternate primary display for CPU2-3030 can be provided by the NCA-2, NCS, or ONYXWorks. Using NCA-2 as primary display enables non-English languages. On network systems (two or more networked fire panel nodes), one network display (either NCA-2, NCS, or ONYXWorks) is required for every system. On network systems, the NCA-2 connects (and requires) a standard Network Communication Module or High-Speed Network Communication Module. Mounts in a row of FACP node or in two annunciator positions. Mounting options include the DP-DISP, ADP-4B, or in an annunciator box, such as the ABS-2D. In CAB-4 top-row applications, a DP-DISP and two BMP-1 blank modules are required for mounting. Order NCA-2C for ULC applications. Non-English versions are available: NCA-2-FR, NCA-2-

HE, NCA-2-KO, NCA-2-PO, NCA-2-SC, NCA-2-SP, NCA-2-TC, NCA-2-TH. For English ULC applications, order NCA-2C; for marine applications, order NCA-2-M; for non-English marine applications order NCA-2-M and appropriate KP-KIT-XX. See DN-7047.

**NCD:** Network control display, with a high-definition 10” touch screen. As part of a standalone NFS2-3030 system, the NCD can serve as Primary Display for the panel, to provide control and status capabilities on displayless nodes. On network systems, the NCD connects to (and requires) a standard Network Communication Module or High-Speed Network Communication Module. Mounting options include the ABS-TD for standalone applications. In the CAB-4 series the NCD can be mounted in the top row with a DP-GDIS1 or lower rows using a DP-GDIS2. See DN-60974.

**NCM-W, NCM-F:** Standard Network Communications Modules. Wire and multi-mode fiber versions available. See DN-6861.

**HS-NCM-W(-2), HS-NCM-MF, HS-NCM-SF, HS-NCM-WMF(-2), HS-NCM-WSF(-2), HS-NCM-MFSF:** High-speed Network Communications Modules that can connect to two nodes. Wire, single-mode fiber, multi-mode fiber, and media conversion models are available. See DN-60454.

**RPT-W, RPT-F, RPT-WF:** Standard-network repeater board with wire connection (RPT-W), multi-mode fiber connection (RPT-F), or allowing a change in media type between wire and fiber (RPT-WF). Not used with high-speed networks. See DN-6971.

**ONYXWorks:** UL/ULC-listed graphics PC workstation, ONYXWorks GUI software, and computer hardware. See DN-7048 for specific part numbers.

**NFN-GW-EM-3:** NFN Gateway, embedded. (Replaces NFN-GW-EM.) See DN-60499.

**NWS-3:** NOTI•FIRE•NET™ Web Server. See DN-6928.

**CAP-GW:** Common Alerting Protocol Gateway. See DN-60756.

**VESDA-HLI-GW:** VESDAnet high-level interface gateway. See DN-60753.

**LEDSIGN-GW:** UL-listed sign gateway. Interfaces with classic and high-speed NOTI•FIRE•NET networks through the NFN Gateway. See DN-60679.

**OAX2-24V:** UL-listed LED sign, used with LEDSIGN-GW. See DN-60679.

### AUXILIARY POWER SUPPLIES AND BATTERIES

**APS2-6R:** Auxiliary Power Supply. Provides up to 6.0 amperes of power for peripheral devices. Includes battery input and transfer relay, and overcurrent protection. Mounts on two of four positions on a CHS-4L or CHS-4 chassis. See DN-5952.

**ACPS-610:** 6.0 A or 10.0 A addressable charging power supply. See DN-60244.

**FCPS-24S6/-24S8:** Remote 6 A and 8 A power supplies with battery charger. See DN-6927.

**BAT Series:** Batteries. AMPS-24 uses two 12 volt, 7 to 200 AH batteries. See DN-6933.

### AUDIO OPTIONS

**NOTE:** See “Enclosures, Chassis, and Dress Plates” on page 6 for mounting hardware.

**DVC-EM:** Digital Voice Command, digital audio processor with message storage for up to 32 minutes of standard quality (4 minutes at high quality) digital audio. See DN-7045.

**DVC-RPU:** Digital Voice Command Remote Paging Unit for use with DVC-EM. Includes the keypad/display. See DN-60726.

**DS-DB:** Digital Series Distribution Board, provides bulk amplification capabilities to the DVC-EM while retaining digital audio distribution capabilities. Can be configured with up to four DS-AMPs, supplying high-level risers spread throughout an installation. See DN-60565.

**DVC-KD:** DVC-EM keypad for local annunciation and controls; status LEDs and 24 user-programmable buttons. See DN-7045.

**DS-AMP/E:** 125W, 25 VRMS, or 100W, 70VRMS. 70VRMS requires DS-XF70V step-up transformer. Digital Series Amplifier, part of the DS-DB system. *See DN-60663.*

**DS-RFM, DS-FM, DS-SFM:** Fiber conversion modules for DVC-EM, DS-DB distribution board, and DAA2/DAX Series amplifiers. *See DN-60633.*

**DAA2-5025(E):** 50W, 25 Vrms Digital Audio Amplifier assembly with power supply; includes chassis. *See DN-60556.*

**DAA2-5070(E):** 50W, 70.7 Vrms Digital Audio Amplifier assembly with power supply; includes chassis. *See DN-60556.*

**DAA2-7525(E):** 75W, 25 Vrms digital audio amplifier assembly with power supply; includes chassis. *See DN-60556.*

**DAX-3525(E):** 35W, 25 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. *See DN-60561.*

**DAX-3570(E):** 35W, 70.7 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. *See DN-60561.*

**DAX-5025(E):** 50W, 25 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. *See DN-60561.*

**DAX-5070(E):** 50W, 70.7 Vrms Digital Audio Amplifier assembly with power supply, includes chassis. *See DN-60561.*

**TELH-1:** Firefighter's Telephone Handset for use with the DVC-EM when mounted in the CA-2 chassis. *See DN-7045.*

**CMIC-1:** Microphone used with DVC/DVC-EM. Included with CA-2 chassis assembly. *See DN-7045.*

**RM-1/RM-1SA:** Remote microphone assemblies, mount on ADP-4 (RM-1) dress panel or CAB-RM/-RMR (RM-1SA) stand-alone cabinets. *See DN-6728.*

**AA-30:** Audio Amplifier, 30 watts, 25 Vrms. Includes amplifier and audio input supervision, backup input, and automatic switchover, power supply, cables. *See DN-3224.*

**AA-120/AA-100:** Audio Amplifier. AA-120 is 120 watts, 25 Vrms. AA-100 is 100 watts, 70.7 Vrms. The amplifier contains an integral chassis for mounting to a CAB-B4, -C4, or -D4 backbox (consumes one row). Includes audio input and amplified output supervision, backup input, and automatic switchover to backup tone. *See DN-3224.*

**DAA Series Digital Audio Amplifiers:** Legacy DAA Series amplifiers are compatible with DVC systems running SR4.0. For specific information on DAA-50 series amplifiers, refer to DN-7046. For information on DAA-7525 Series, refer to DN-60257.

#### **COMPATIBLE DEVICES, EIA-232 PORTS**

**PRN-7:** 80-column printer. *See DN-60897*

**VS4095/5:** Printer, 40-column, 24 V. Order from Keltron, Inc. *See DN-3260.*

**DPI-232:** Direct Panel Interface, specialized modem for extending serial data links to remotely located FACPs and/or peripherals. *See DN-6870.*

#### **COMPATIBLE DEVICES, EIA-485 PORTS**

**ACM-24AT:** ONYX® Series ACS annunciator – up to 24 points, expandable to 96 of annunciation with Alarm or Active LED, Trouble LED, and switch per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) by point to be red, green, or yellow; the Trouble LED is always yellow. *See DN-6862.*

**AEM-24AT:** Same LED and switch capabilities as ACM-24AT; expands the ACM-24AT to 48, 72, or 96 points. *See DN-6862.*

**ACM-48A:** ONYX® Series ACS annunciator – 48 points, expandable to 96 of annunciation with Alarm or Active LED per circuit. Active/Alarm LEDs can be programmed (by powered-up switch selection) in groups of 24 to be red, green, or yellow. Expandable to 96 points with one AEM-48A. *See DN-6862.*

**AEM-48A:** Same LED capabilities as ACM-48A; expands the ACM-48A to 96 points. *See DN-6862.*

**ACM-8R:** Remote Relay Module with eight Form-C contacts. Can be located up to 6,000 ft. (1828.8 m) from panel on four wires. *See DN-3558.*

**LCD-160:** Liquid Crystal Display annunciator, 160-character backlit. Can store character sets for multiple languages. Order LCD-160C for ULC applications. *See DN-6940.*

**LCD2-80:** Terminal and ACS mode. 80-character, backlit LCD display. Mounts up to 6,000 ft. (1828.8 m) from panel. Up to 32 per FACP. *See LCD2-80 (DN-60548).*

**SCS Series:** Smoke control station; eight (expandable to 16) circuits. *See DN-4818.*

**TM-4:** Transmitter Module. Includes three reverse-polarity circuits and one municipal box circuit. Mounts in panel module position (as in single-address mode applications) or in CHS-M3 position. *See DN-6860.*

**UDACT-2:** Universal Digital Alarm Communicator Transmitter, 636 channel. *See DN-60686.*

**UZC-256:** Programmable Universal Zone Coder provides positive non-interfering successive zone coding. Microprocessor-controlled, field-programmable from IBM®-compatible PCs (*requires optional programming kit*). Mounts on a CHS-4 series chassis within NFS2-3030.

#### **COMPATIBLE INTELLIGENT DEVICES**

NOTE: "A" suffix indicates ULC-Listed model.

**FWSG(A) Wireless SWIFT Gateway:** Addressable gateway supports wireless SLC devices. Order FWSGA for ULC applications. *See DN-60820.*

**FCO-951/-IV** FlashScan, Addressable intelligent multi-criteria smoke sensors, photo, carbon monoxide, fixed temperature heat detector and infra-red (IR). ULC: FCO-951A/-IV

**FPC-951.** FlashScan, Combined photoelectric and carbon monoxide sensor. ULC: FPC-951A.

**FSCO-951.** FlashScan, Addressable carbon monoxide sensor. ULC: FSCO-951A.

**FPTI-951, FPTI-951-IV:** Addressable intelligent multi-criteria photoelectric, thermal and IR sensors. ULC: FPTI-951A, FPTI-951A-IV.

**FS-OSI-RI:** Addressable intelligent single-ended beam smoke detector. ULC: FS-OSI-RIA.

**FSP-951:** White, low-profile intelligent photoelectric sensor, FlashScan only. ULC: FSP-951A.

**FSP-951-IV:** Ivory, low-profile intelligent photoelectric sensor. ULC: FSP-951A-IV

**FSP-951T:** White, same as FSP-951 but includes a built-in 135°F (57°C) fixed-temperature thermal device. FlashScan only. ULC: FSP-951TA.

**FSP-951T-IV:** Ivory, same as FSP-951T but includes a built-in 135°F (57°C) fixed-temperature thermal device. ULC: FSP-951TA-IV.

**FSP-951R:** White, low-profile intelligent photoelectric sensor, remote test capable. For use with DNR/DNRW. FlashScan only. ULC: FSP-951RA

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable. FlashScan only. ULC: FSP-951RA-IV, for use with DNRA.

**FST-951:** White, low-profile intelligent 135°F fixed thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951A. *See DN-60975.*

**FST-951-IV:** Ivory, low-profile intelligent 135°F fixed thermal sensor, FlashScan and CLIP. Must be mounted to one of the bases listed below. ULC: FST-951A-IV.

**FST-951R:** White, low-profile intelligent rate-of-rise thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951A

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable. FlashScan only. ULC: FSP-95RA-IV, for use with DNRA.

**FST-951H:** White, low-profile intelligent 190°F fixed thermal sensor, FlashScan only. Must be mounted to one of the bases listed below. ULC: FST-951HA.

**FST-951H-IV:** Ivory, low-profile intelligent 190°F thermal sensor, FlashScan and CLIP. Must be mounted to one of the bases listed below. ULC: FST-951HA-IV.

**FSV-951, FSV-951R:** White, intelligent high-sensitivity photoelectric smoke detector. ULC: FSV-951A, FSV-951RA

**FSV-951-IV, FSV-951R-IV:** Ivory, intelligent high-sensitivity photoelectric smoke detector. ULC: FSV-951A-IV, FSV-951RA-IV.

**VEP-A00-P-NTF:** Intelligent aspiration smoke detector with LED display, 4 pipes, covers up to 21,520 square feet. UL/ULC. *See DN-61029.* UL/ULC Listed.

**VEP-A10-P-NTF:** Intelligent aspiration smoke detector with LED and LCD display, 4 pipes, covers up to 21,520 square feet. UL/ULC. *See DN-61029.* UL/ULC Listed.

**VEP-A00-1P-NTF:** Intelligent aspiration smoke detector with LED display, single pipe, covers up to 10,760 square feet. UL/ULC. *See DN-61029.* UL/ULC Listed.

**VEU-A00-NTF:** Intelligent aspiration smoke detector with LED display, 4 pipes, covers up to 69,965 square feet. UL/ULC. *See DN-61034.* UL/ULC Listed.

**VEU-A10-NTF:** Intelligent aspiration smoke detector with LED and LCD display, 4 pipes, covers up to 69,965 square feet. UL/ULC. *See DN-61034.* UL/ULC Listed.

**VEA-040-A00-NTF:** Intelligent aspiration with LED display, 40 point-addressable detection points. Covers 36,000 square feet. UL/ULC. *See DN-61036.* UL/ULC Listed.

**VEA-040-A10-NTF:** Intelligent aspiration with LED and LCD display, 40 point-addressable detection points. Covers 36,000 square feet. UL/ULC. *See DN-61036.* UL/ULC Listed.

**VES-A00-P-NTF-UL:** Intelligent scanning aspiration detector with LEDs. *See DN-62040.* UL 268 7th edition.

**VES-A10-P-NTF-UL:** Intelligent scanning aspiration detector with 3.5" display. *See DN-62040.* UL 268 7th edition.

**DNR:** InnovairFlex low-flow non-relay duct-detector housing. ULC: DNRA. (Order FSP-951R(A) separately.) *See DN-60429.*

**DNRW:** Same as above with NEMA-4 rating, watertight. *See DN-60429.*

**B224RB-WH:** White, low-profile relay base. *See DN-60054.* ULC: B224RBA-WH.

**B224RB-IV:** Ivory, plug-in System Sensor relay base. ULC: B224RBA-IV.

**B224BI-WH:** White, isolator base for low-profile detectors. *See DN-60054.* ULC: B224BIA-WH.

**B224BI-IV:** Ivory isolator detector base. ULC: B224BIA-IV.

**B300-6:** White, standard flanged low-profile mounting base. (For 10-pack order B300-6-BP.) ULC: B300A-6.

**B300-6-IV:** Ivory, standard flanged low-profile mounting base. ULC: B300A-6-IV.

**B501-WHITE:** European-style, 4" (10.16 cm) base. *See DN-60054.* (For 10-pack order B501-WHITE-BP.) UL/ULC listed.

**B501-BL:** Black, 4" standard European flangeless mounting base. UL/ULC listed.

**B501-IV:** Ivory color, 4" standard European flangeless mounting base. UL/ULC listed.

**B200S-WH:** White, intelligent programmable sounder base, capable of producing a variety of tone patterns including ANSI Temporal 3. Compatible with synchronization protocol. *See DN-60054.* ULC: B200SA-WH.

**B200S-IV:** Ivory intelligent, programmable sounder base. ULC: B200SA-IV.

**B200SCOA-WH:** White intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO detectors. Based on B200SA. ULC listed.

**B200SCOA-IV:** Ivory intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO detectors. Based on B200SA. ULC listed.

**B200S-LF-WH:** White, low-frequency version of B200S. *See DN-60054.*

**B200S-LF-IV:** Ivory, low-frequency version of B200S.

**B200SR-WH:** White intelligent programmable sounder base, Temporal 3 or Continuous tone. For retrofit installations replacing B501BH series bases. *See DN-60054.* ULC: B200SRA-WH.

**B200SR-IV:** Ivory intelligent programmable sounder base, Temporal 3 or Continuous tone. For retrofit installations replacing B501BH series bases. ULC: B200SRA-IV.

**B200SR-LF-WH:** White, low-frequency version of B200SR. *See DN-60054.*

**B200SR-LF-IV:** Ivory, low-frequency version of B200SR.

**FMM-1(A):** FlashScan monitor module. *See DN-6720.*

**FDM-1(A):** FlashScan dual monitor module. *See DN-6720.*

**FZM-1(A):** FlashScan two-wire detector monitor module. *See DN-6720.*

**FMM-101(A):** FlashScan miniature monitor module. *See DN-6720.*

**FMM-4-20:** FlashScan 4-20 mA protocol monitor module. *See DN-60411.*

**FTM-1(A):** Firephone Telephone Module connects a remote firefighter telephone to a centralized telephone console. Reports status to panel. Wiring to jacks and handsets is supervised. *See DN-6989.*

**FCM-1(A):** FlashScan control module. *See DN-6724.*

**FCM-1-REL(A):** FlashScan releasing control module. *See DN-60390.*

**FRM-1(A):** FlashScan relay module. *See DN-6724.*

**FDRM-1(A):** FlashScan dual monitor/dual relay module. *See DN-60709.*

**NBG-12LX:** Manual pull station, addressable. *See DN-6726.*

**N-MPS series:** Manual pull stations, addressable and conventional. ULC-listed; for use in Canada only. *See DN-5497 and DN-60629.*

**ISO-X(A):** Isolator module. *See DN-2243.*

**ISO-6(A):** Six fault isolator module. *See DN-60844.*

**XP6-C(A):** FlashScan six-circuit supervised control module. *See DN-6924.*

**XP6-MA(A):** FlashScan six-zone interface module; connects intelligent alarm system to two-wire conventional detection zone. *See DN-6925.*

**XP6-R(A):** FlashScan six-relay (Form-C) control module. *See DN-6926.*

**XP10-M(A):** FlashScan ten-input monitor module. *See DN-6923.*

#### **ENCLOSURES, CHASSIS, AND DRESS PLATES**

**CAB-4 Series Enclosure:** NFS2-3030 mounts in a standard CAB-4 Series enclosure (available in four sizes, "A" through "D"). Backbox and door ordered separately; requires BP2-4 battery plate. A trim ring option is available for semi-flush mounting. *See DN-6857.*

**CAB-5 Series Enclosure:** NFS2-3030 can mount in CAB-5 Series enclosures designed for INSPIRE panels, using CHS-ADP adapter plate. *See DN-62113 for CAB-5 options.*

**EQ Series Cabinets:** EQ series cabinets will house amplifiers, power supplies, battery chargers and control modules. EQ cabinets are available in three sizes, "B" through "D". *See DN-60229.*



**CAB-BM Marine System:** Protects equipment in shipboard and waterfront applications. Order CPU2-3030D-M; for non-English marine applications order CPU2-3030D and appropriate KP-KIT-XX. Also order **BB-MB** for systems using 100 AH batteries. For a full list of required and optional equipment, see DN-60688.

**CHS-M3:** Mounting chassis for CPU2-3030. One required for each CPU2-3030D/3030ND.

**DP-DISP:** Dress panel for top row in cabinet with CPU2-3030D installed.

**DP-1B:** Blank dress panel. Provides dead-front panel for unused tiers; covers DAA2/DAX series or AA-series amplifier. See DN-7046.

**CHS-BH1:** Battery chassis; holds two 12.0 AH batteries. Mounts on the left side of DAA2 chassis. See DN-7046.

**CA-1:** Chassis, occupies one tier of a CAB-4 Series enclosure. The left side accommodates one DVC-EM and a DVC-KD (optional); and the right side houses a CMIC-1 microphone and its well (optional). See DN-7045.

**CA-2:** Chassis assembly, occupies two tiers of a CAB-4 Series enclosure. The left side accommodates one DVC-EM mounted on a half-chassis and one NFS2-3030 or NCA-2 mounted on a half-chassis. The right side houses a microphone/handset well. The CA-2 assembly includes CMIC-1 microphone. ADDR Series doors with two-tier visibility are available for use with the CA-2 configuration: ADDR-B4, ADDR-C4, ADDR-D4 (below).

**ADDR-B4\*:** Two-tier-sized door designed for use with the CA-2 chassis configuration. ADDR Series doors are similar to CAB-4 Series "DR" doors, but a clear window space exposes the top two tiers of the CAB-4 enclosure. Use an SBB-B4 backbox with the ADDR-B4. See DN-7045, DN-6857.

**ADDR-C4\*:** Three-tier-sized door designed for use with the CA-2 chassis configuration. ADDR Series doors are similar to CAB-4 Series "DR" doors, but a clear window space exposes the top two tiers of the CAB-4 enclosure. Use an SBB-C4 backbox with the ADDR-C4. See DN-7045, DN-6857.

**ADDR-D4\*:** Four-tier-sized door designed for use with the CA-2 chassis configuration. ADDR Series doors are similar to CAB-4 Series "DR" doors, but a clear window space exposes the top two tiers of the CAB-4 enclosure. Use an SBB-D4 backbox with the ADDR-D4. See DN-7045, DN-6857.

\* Note: Use ADDR-B4/C4/D4 when CA-2 chassis is installed in top two rows with NCA-2 or BP-CA2. Use standard door when CA-2 is not installed in top two rows. For additional configuration information, see the DVC application guide on <http://esd.notifier.com>.

**DPA-1:** Dress panel, used with the CA-1 chassis when configured with a DVC-EM, DVC-KD, and CMIC-1. See DN-7045.

**DPA-2:** Dress Panel used with the CA-2 chassis assembly.

**DPA-1A4:** Dress panel, used with the CA-1 chassis when the CMIC-1 is not used. Provides mounting options on right two bays for two ACS annunciators, or for blank plates. See DN-7045.

**ADP-4B:** Annunciator dress plate. Mounts in rows 2, 3 or 4 of a CAB-4 series enclosure. Used with ACS series annunciators.

**BMP-1:** Blank module for unused module positions.

**DP-1B:** Blank dress panel. Provides dead-front panel for unused tiers; covers DAA2/DAX series or AA-series amplifier.

**BP2-4:** Battery plate, required.

**CHS-4L:** Low-profile four-position Chassis. Mounts two AA-30 amplifiers.

**CHS-4N:** Chassis for mounting up to four APS-6Rs.

**CHS-6:** Chassis used with the XP6 and XP10 Multi-Modules. Mounts up to six modules in any CAB-4 series row.

**NFS-LBB:** Battery Box. The NFS-LBB is used to mount up to two 55 AH batteries. Dimensions: Box: 24" (610 mm) wide x 14" (356 mm) high x 7.75" (197 mm) deep. Door: 24.125" (613 mm) wide x 14.25" (362 mm) high; door adds 0.0625" (approx. 1.6 mm) to depth.

## BACKBOXES

NOTE: "C" suffix indicates ULC-Listed model.

**ABF-1B(C)** Annunciator Flush Box

**ABF-1DB(C)** Annunciator Flush Box with Door. UL/ULC Listed.

**ABF-2B** Annunciator Flush Box

**ABF-2DB(C)** Annunciator Flush Box with Door

**ABF-4B** Annunciator Flush Box

**ABS-1TB(C)** Annunciator Surface Box

**ABS-1B(C)** Annunciator Surface Box

**ABS-2B** Annunciator Surface Box

**ABS-2D(C)** Annunciator Surface Box

**ABS-4D(C)** Annunciator Surface Box

**BB-100:** Backbox for batteries and power supplies. The BB-100 mounts up to two 100 AH batteries and power supply, if needed. 30" (76.20 cm) wide x 25" (63.50 cm) high x 7.5" (19.05 cm) deep; depth includes door.

**BB-200:** Backbox for batteries and power supplies. Holds up to four 100 AH batteries (200 AH capacity) and power supply. 30" (76.20 cm) wide x 36" (91.44 cm) high x 7.5" (19.05 cm) deep; depth includes door.

**BB-UZC:** Backbox for housing the UZC-256 for applications where the UZC will not fit in panel enclosure. Black; for red, order BB-UZC-R. See DN-3404.

**SEISKIT-CAB:** Seismic mounting kit. Required for seismic-certified applications with NFS2-3030 and other equipment in CAB-4 Series Enclosures. Includes battery bracket for two 26 AH batteries.

**SEISKIT-LBB:** Seismic kit for the NFS-LBB. Includes battery bracket for two 55 AH batteries.

## OTHER OPTIONS

**CGW-MB:** CLSS Gateway for Internet/cloud-based communication between the FACP and peripheral devices. See HON-62034.

**HON-CGW-MBB:** CLSS Gateway, pre-installed in a cabinet. See HON-62034.

**411:** Slave digital alarm communicator. See DN-6619.

**411UDAC:** Digital alarm communicator. See DN-6746.

**IPDACT-2, IPDACT Internet Monitoring Module:** Connects to primary and secondary DACT telephone output ports for internet communications under customer-provided Ethernet connection. Requires compatible Teldat VisorALARM Central Station Receiver. Can use DHCP or static IP. See DN-60408.

**IPCHSKIT:** IP Communicator Chassis Mounting Kit. For mounting an IPDACT-2/2UD onto the panel chassis or CHS-4 series chassis. Use IPENC for external mounting applications.

**IPSPLT:** Y-adaptor option allow connection of both panel dialer outputs to one IPDACT-2/2UD cable input.

**IPENC:** External enclosure for IPDACT, includes IPBRKT mounting bracket; Red; for black, order IPENC-B.

**HWF2V-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, Verizon LTE / IP. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. See DH-62010. (For Canadian applications order IPGSM-4GC. See DH-60771.)

**HWF2A-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, AT&T LTE / IP. Provides selectable configurable paths: cellular only, IP only, or IP primary with cellular backup. Connects to the primary and secondary ports of a DACT. (For Canadian applications order IPGSM-4GC. See DH-60771.)

**NOTE:** For other options including compatibility with retrofit equipment, refer to the panel's installation manual, the SLC manual, and the Device Compatibility Document.

## SPECIFICATIONS

### SYSTEM CAPACITY

- Intelligent Signaling Line Circuits..... 1 expandable to 10
- Intelligent detectors ..... 159 per loop
- Addressable monitor/control modules ..... 159 per loop
- Programmable software zones ..... over 2000
- ACS annunciators  
per CPU2-3030..... 32 address x 64 or 96 points  
**NOTE:** The CPU2-3030 can support up to 96 annunciator address points per ACM-24AT/-48A.

### ELECTRICAL SPECIFICATIONS

#### Primary Input Power:

- AMPS-24: 110-120 VAC, 50/60 Hz, 4.5 A maximum.
- AMPS-24E: 240 VAC, 50/60 Hz, 2.25 A maximum.

#### DC Output:

- Main 24 VDC: Up to 5.0 A
- Aux 24 VDC: Up to 5.0 A
- 5 VDC: Up to 0.15 A.

#### Current draw (Standby/Alarm):

- CPU2-3030D board: 0.340 A.
- CPU2-3030ND board: 0.120 A.
- LCM-320: 0.130 A.
- LEM-320: 0.100 A.
- AMPS-24(E)\*: 0.13 A.

(Draws power from secondary power source only.)

**NOTE:** See AMPS-24(E) Manual 51907 for a complete current draw calculation sheet and details of input and output values.

**Battery charger range:** 7 AH – 200 AH. Use separate cabinet for batteries over 26 AH.

**Float Rate:** 27.6 V.

### SHIPPING WEIGHT

- CPU2-3030D: 5.95 lb (2.70 kg).
- CPU2-3030ND: 2.90 lb (1.32 kg).

### TEMPERATURE AND HUMIDITY RANGES

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

### AGENCY LISTINGS AND APPROVALS

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S635.
- **Fire Dept. of New York:** COA#6211.
- **CSFM:** 7165-0028:0224 (Commercial).
- **FM Approved.**
- **FM6320 Approved.** Class 6320 for Gas Detection.
- **City of Chicago.**
- **City of Denver.**
- **Singapore Productivity and Standards Board (PSB).**
- **CCCF listed.**
- **Fire Services Department (Hong Kong).**

**Marine Applications:** Marine approved systems must be configured using components itemized in this document. (See Main System Components, in "Product Line Information.") Specific connections and requirements for those components are described in the installation document, PN 54756. When these requirements are followed, systems are approved by the following agencies:

- **US Coast Guard** 161.002/55/0 (Standard 46 CFR and 161.002).
- **Lloyd's Register** 11/600013 (ENV 3 category).
- **American Bureau of Shipping (ABS)** Type Approval.

**NOTE:** For information on marine applications, see DN-60688.

### STANDARDS

The NFS2-3030 complies with the following UL Standards and NFPA 72, International Building Code (IBC), and California Building Code (CBC) Fire Alarm Systems requirements:

- **UL 864**, 10th edition (Control Units and Accessories for Fire Alarm Systems).
- **UL 2610** (Commercial Premises Security Alarm Units and Systems).
- **UL 2572** (Mass Notification Systems). (NFS2-3030 version 20 or higher)
- **ULC-S527-11** Standard for the Installation of Fire Alarm Systems.
- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires TM-4).
- **REMOTE STATION** (Automatic, Manual, Waterflow and Sprinkler Supervisory) (requires TM-4).
- **PROPRIETARY** (Automatic, Manual, Waterflow and Sprinkler Supervisory). *Not applicable for FM.*
- **EMERGENCY VOICE/ALARM.**
- **OT, PSDN** (Other Technologies, Packet-switched Data Network).
- **IBC 2012, IBC 2009, IBC 2006, IBC 2003, IBC 2000** (Seismic).
- **CBC 2007** (Seismic).



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

NOTIFIRE<sup>®</sup>NET<sup>™</sup> and ONYXWorks<sup>™</sup> are trademarks; and FlashScan<sup>®</sup>, NOTIFIER<sup>®</sup>, ONYX<sup>®</sup>, SWIFT<sup>®</sup>, VeriFire<sup>®</sup> Tools, VESDA<sup>®</sup>, and VIEW<sup>®</sup> are all registered trademarks of Honeywell International Inc.  
©2022 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

### NOTIFIER

12 Clintonville Road  
Northford, CT 06472  
203.484.7161  
www.notifier.com

Country of Origin: USA



# FMM-1(A), FMM-101(A), FZM-1(A) & FDM-1(A)

## Monitor Modules with FlashScan®



Intelligent/Addressable Devices

### General

Four different monitor modules are available for Notifier's intelligent control panels for a variety of applications. Monitor modules supervise a circuit of dry-contact input devices, such as conventional heat detectors and pull stations, or monitor and power a circuit of two-wire smoke detectors (FZM-1(A)).

**FMM-1(A)** is a standard-sized module (typically mounts to a 4" [10.16 cm] square box) that supervises either a Style D (Class A) or Style B (Class B) circuit of dry-contact input devices.

**FMM-101(A)** is a miniature monitor module a mere 1.3" (3.302 cm) H x 2.75" (6.985 cm) W x 0.65" (1.651 cm) D that supervises a Style B (Class B) circuit of dry-contact input devices. Its compact design allows the FMM-101(A) to be mounted in a single-gang box behind the device it monitors.

**FZM-1(A)** is a standard-sized module that monitors and supervises compatible two-wire, 24 volt, smoke detectors on a Style D (Class A) or Style B (Class B) circuit.

**FDM-1(A)** is a standard-sized dual monitor module that monitors and supervises two independent two-wire Style B (Class B) dry-contact initiating device circuits (IDCs) at two separate, consecutive addresses in intelligent, two-wire systems.

FlashScan® (U.S. Patent 5,539,389) is a communication protocol developed by NOTIFIER that greatly increases the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of other communication protocols.

### FMM-1(A) Monitor Module

- Built-in type identification automatically identifies this device as a monitor module to the control panel.
- Powered directly by two-wire SLC loop. No additional power required.
- High noise (EMF/RFI) immunity.
- SEMS screws with clamping plates for ease of wiring.
- Direct-dial entry of address: 01 – 159 on FlashScan loops; 01 – 99 on CLIP loops.
- LED flashes green during normal operation (programmable option) and latches on steady red to indicate alarm.

The FMM-1(A) Monitor Module is intended for use in intelligent, two-wire systems, where the individual address of each module is selected using the built-in rotary switches. It provides either a two-wire or four-wire fault-tolerant Initiating Device Circuit (IDC) for normally-open-contact fire alarm and supervisory devices. The module has a panel-controlled LED indicator. The FMM-1(A) can be used to replace MMX-1(A) modules in existing systems.

### FMM-1(A) APPLICATIONS

Use to monitor a zone of four-wire smoke detectors, manual fire alarm pull stations, waterflow devices, or other normally-



FMM-1(A) (Type H)

open dry-contact alarm activation devices. May also be used to monitor normally-open supervisory devices with special supervisory indication at the control panel. Monitored circuit may be wired as an NFPA Style B (Class B) or Style D (Class A) Initiating Device Circuit. A 47K Ohm End-of-Line Resistor (provided) terminates the Style B circuit. No resistor is required for supervision of the Style D circuit.

### FMM-1(A) OPERATION

Each FMM-1(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC). A flashing LED indicates that the module is in communication with the control panel. The LED latches steady on alarm (subject to current limitations on the loop).

### FMM-1(A) SPECIFICATIONS

**Nominal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 5.0 mA (LED on).

**Average operating current:** 375 µA (LED flashing), 1 communication every 5 seconds, 47k EOL.

**Maximum IDC wiring resistance:** 1500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**EOL resistance:** 47K Ohms.


**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

## FMM-101(A) Mini Monitor Module

- Built-in type identification automatically identifies this device as a monitor module to the panel.
- Powered directly by two-wire SLC loop. No additional power required.
- High noise (EMF/RFI) immunity.
- Tinned, stripped leads for ease of wiring.
- Direct-dial entry of address: 01 – 159 on FlashScan loops; 01 – 99 on CLIP loops.

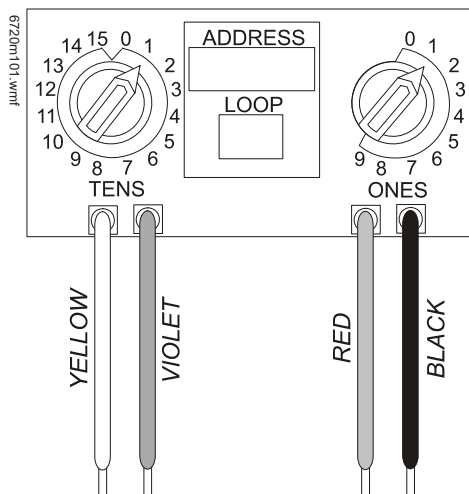

The FMM-101(A) Mini Monitor Module can be installed in a single-gang junction directly behind the monitored unit. Its small size and light weight allow it to be installed without rigid mounting. The FMM-101(A) is intended for use in intelligent, two-wire systems where the individual address of each module is selected using rotary switches. It provides a two-wire initiating device circuit for normally-open-contact fire alarm and security devices. The FMM-101(A) can be used to replace MMX-101(A) modules in existing systems.

### FMM-101(A) APPLICATIONS

Use to monitor a single device or a zone of four-wire smoke detectors, manual fire alarm pull stations, waterflow devices, or other normally-open dry-contact devices. May also be used to monitor normally-open supervisory devices with special supervisory indication at the control panel. Monitored circuit/device is wired as an NFPA Style B (Class B) Initiating Device Circuit. A 47K Ohm End-of-Line Resistor (provided) terminates the circuit.

### FMM-101(A) OPERATION

Each FMM-101(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC).

### FMM-101(A) SPECIFICATIONS

**Nominal operating voltage:** 15 to 32 VDC.

**Average operating current:** 350  $\mu$ A, 1 communication every 5 seconds, 47k EOL; 600  $\mu$ A Max. (Communicating, IDC Shorted).

**Maximum IDC wiring resistance:** 1500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**Maximum IDC Current:** 450  $\mu$ A.

**EOL resistance:** 47K Ohms.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 1.3" (3.302 cm) high x 2.75" (6.985 cm) wide x 0.65" (1.651 cm) deep.

**Wire length:** 6" (15.24 cm) minimum.

## FZM-1(A) Interface Module

- Supports compatible two-wire smoke detectors.
- Supervises IDC wiring and connection of external power source.
- High noise (EMF/RFI) immunity.
- SEMS screws with clamping plates for ease of wiring.
- Direct-dial entry entry of address: 01 – 159 on FlashScan loops, 01 – 99 on CLIP loops.
- LED flashes during normal operation; this is a programmable option.
- LED latches steady to indicate alarm on command from control panel.

The FZM-1(A) Interface Module is intended for use in intelligent, addressable systems, where the individual address of each module is selected using built-in rotary switches. This module allows intelligent panels to interface and monitor two-wire conventional smoke detectors. It transmits the status (normal, open, or alarm) of one full zone of conventional detectors back to the control panel. All two-wire detectors being monitored must be UL compatible with the module. The FZM-1(A) can be used to replace MMX-2(A) modules in existing systems.

### FZM-1(A) APPLICATIONS

Use the FZM-1(A) to monitor a zone of two-wire smoke detectors. The monitored circuit may be wired as an NFPA Style B (Class B) or Style D (Class A) Initiating Device Circuit. A 3.9 K Ohm End-of-Line Resistor (provided) terminates the end of the Style B or D (class B or A) circuit (maximum IDC loop resistance is 25 Ohms). Install ELR across terminals 8 and 9 for Style D application.

### FZM-1(A) OPERATION

Each FZM-1(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC). A flashing LED indicates that the module is in communication with the control panel. The LED latches steady on alarm (subject to current limitations on the loop).

### FZM-1(A) SPECIFICATIONS

**Nominal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 5.1 mA (LED on).

**Maximum IDC wiring resistance:** 25 Ohms.

**Average operating current:** 270  $\mu$ A, 1 communication and 1 LED flash every 5 seconds, 3.9k eol.

**EOL resistance:** 3.9K Ohms.

**External supply voltage (between Terminals T10 and T11):**

- DC voltage: 24 volts power limited.
- Ripple voltage: 0.1 Vrms maximum.
- Current: 90 mA per module maximum.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

## FDM-1(A) Dual Monitor Module

The FDM-1(A) Dual Monitor Module is intended for use in intelligent, two-wire systems. It provides two independent two-wire initiating device circuits (IDCs) at two separate, consecutive addresses. It is capable of monitoring normally open contact fire alarm and supervisory devices; or either normally open or normally closed security devices. The module has a single panel-controlled LED.

**NOTE:** The FDM-1(A) provides two Style B (Class B) IDC circuits ONLY. Style D (Class A) IDC circuits are NOT supported in any application.

### FDM-1(A) SPECIFICATIONS

**Normal operating voltage range:** 15 to 32 VDC.

**Maximum current draw:** 6.4 mA (LED on).

**Average operating current:** 750  $\mu$ A (LED flashing).

**Maximum IDC wiring resistance:** 1,500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**Maximum IDC Current:** 240  $\mu$ A

**EOL resistance:** 47K Ohms.

**Temperature range:** 32° to 120°F (0° to 49°C).

**Humidity range:** 10% to 93% (non-condensing).

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

### FDM-1(A) AUTOMATIC ADDRESSING

The FDM-1(A) automatically assigns itself to two addressable points, starting with the original address. For example, if the FDM-1(A) is set to address "26", then it will automatically assign itself to addresses "26" and "27".

**NOTE:** "Ones" addresses on the FDM-1(A) are 0, 2, 4, 6, or 8 only. Terminals 6 and 7 use the first address, and terminals 8 and 9 use the second address.



#### CAUTION:

Avoid duplicating addresses on the system.

## Installation

FMM-1(A), FZM-1(A), and FDM-1(A) modules mount directly to a standard 4" (10.16 cm) square, 2.125" (5.398 cm) deep, electrical box. They may also be mounted to the SMB500 surface-mount box. Mounting hardware and installation instructions are provided with each module. All wiring must conform to applicable local codes, ordinances, and regulations. These modules are intended for power-limited wiring only.

The FMM-101(A) module is intended to be wired and mounted without rigid connections inside a standard electrical box. All wiring must conform to applicable local codes, ordinances, and regulations.

## Agency Listings and Approvals

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S635.
- **ULC:** S635.
- **FM Approved.**
- **CSFM:** 7300-0028:0219, 7165-0028:0224, 7165-0028:0243.
- **MEA:** 457-99-E.
- **U.S. Coast Guard:** 161.002/50/0 (NFS2-640, NFS2-320, NFS2-3030).
- **Lloyd's Register:** 11/600013 (NFS2-640, NFS2-320, NFS2-3030).
- **Fire Dept. of New York:** COA #6121 (NFS2-640, NFS-320), COA# 6114 (NFS2-3030).

## Product Line Information

**NOTE:** "A" suffix indicates ULC-listed model.

**FMM-1(A):** Monitor module.

**FMM-101(A):** Monitor module, miniature.

**FZM-1(A):** Monitor module, two-wire detectors.

**FDM-1(A):** Monitor module, dual, two independent Class B circuits.

**SMB500:** Optional surface-mount backbox.

**NOTE:** See installation instructions and refer to the SLC Wiring Manual, PN 51253.

---

FlashScan® and NOTIFIER® are registered trademarks and FireWatch™ is a trademark of Honeywell International Inc.  
©2015 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)

# FCM-1(A) & FRM-1(A) Series

## Control and Relay Modules




Intelligent / Addressable Devices

### General

**FCM-1(A) Control Module:** The FCM-1(A) Addressable Control Module provides Notifier intelligent fire alarm control panels a circuit for Notification Appliances (horns, strobes, speakers, etc.). Addressability allows the FCM-1(A) to be activated, either manually or through panel programming, on a select (zone or area of coverage) basis.

**FRM-1(A) Relay Module:** The FRM-1(A) Addressable Relay Module provides the system with a dry-contact output for activating a variety of auxiliary devices, such as fans, dampers, control equipment, etc. Addressability allows the dry contact to be activated, either manually or through panel programming, on a select basis.

FlashScan® (U.S. Patent 5,539,389) is a communication protocol developed by NOTIFIER Engineering that greatly enhances the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of other designs.

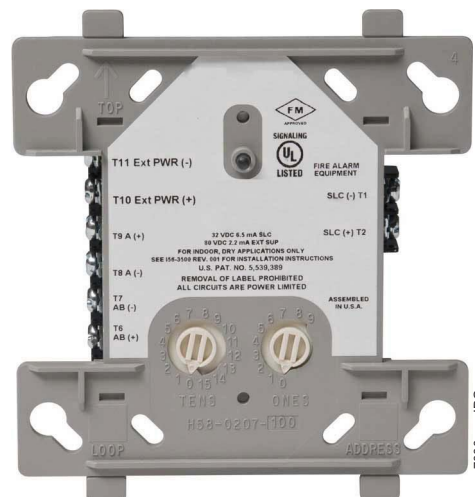

FCM-1(A)

### Features

- Built-in type identification automatically identifies these devices to the control panel.
- Internal circuitry and relay powered directly by two-wire SLC loop. The FCM-1(A) module requires power (for horns, strobes, etc.), or audio (for speakers).
- Integral LED “blinks” green each time a communication is received from the control panel and turns on in steady red when activated.
- LED blink may be deselected globally (affects all devices).
- High noise immunity (EMF/RFI).
- The FCM-1(A) may be used to switch 24-volt NAC power, audio (up to 70.7 Vrms).
- Wide viewing angle of LED.
- SEMS screws with clamping plates for wiring ease.
- Direct-dial entry of address 01– 159 for FlashScan loops, 01 – 99 for CLIP mode loops.
- Speaker, and audible/visual applications may be wired for Class B or A (Style Y or Z).

### Applications

The FCM-1(A) is used to switch 24 VDC audible/visual power, high-level audio (speakers). The FRM-1(A) may be programmed to operate dry contacts for applications such as door holders or Air Handling Unit shutdown, and to reset four-wire smoke detector power.

**NOTE:** Refer to the SLC Manual (PN 51253) for details regarding releasing applications with the FCM-1(A). Refer to the FCM-1-REL datasheet (DN-60390) for new FlashScan® releasing applications.

### Construction

- The face plate is made of off-white heat-resistant plastic.
- Controls include two rotary switches for direct-dial entry of address (01-159).

- The FCM-1(A) is configured for a single Class B (Style Y) or Class A (Style Z) Notification Appliance Circuit.
- The FRM-1(A) provides two Form-C dry contacts that switch together.

### Operation

Each FCM-1(A) or FRM-1(A) uses one of 159 possible module addresses on a SLC loop (99 on CLIP loops). It responds to regular polls from the control panel and reports its type and status, including the open/normal/short status of its Notification Appliance Circuit (NAC). The LED blinks with each poll received. On command, it activates its internal relay. The FCM-1(A) supervises Class B (Style Y) or Class A (Style Z) notification or control circuits.

Upon code command from the panel, the FCM-1(A) will disconnect the supervision and connect the external power supply in the proper polarity across the load device. The disconnection of the supervision provides a positive indication to the panel that the control relay actually turned ON. The external power supply is always relay isolated from the communication loop so that a trouble condition on the external power supply will never interfere with the rest of the system.

Rotary switches set a unique address for each module. The address may be set before or after mounting. The built-in TYPE CODE (not settable) will identify the module to the control panel, so as to differentiate between a module and a sensor address.

### Specifications for FCM-1(A)

**Normal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 6.5 mA (LED on).

**Average operating current:** 350  $\mu$ A direct poll, 375  $\mu$ A group poll with LED flashing, 485  $\mu$ A Max. (LED flashing, NAC shorted.)

Maximum NAC Line Loss: 4 VDC.

**External supply voltage (between Terminals T10 and T11):** Maximum (NAC): Regulated 24 VDC; Maximum (Speakers): 70.7 V RMS, 50W.

**Drain on external supply:** 1.7 mA maximum using 24 VDC supply; 2.2 mA Maximum using 80 VRMS supply.

**Max NAC Current Ratings:** For class B wiring system, the current rating is 3A; For class A wiring system, the current rating is 2A.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% non-condensing.

**Dimensions:** 4.5" (114.3 mm) high x 4" (101.6 mm) wide x 1.25" (31.75 mm) deep. Mounts to a 4" (101.6 mm) square x 2.125" (53.975 mm) deep box.

**Accessories:** SMB500 Electrical Box; CB500 Barrier

### Specifications for FRM-1(A)

**Normal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 6.5 mA (LED on).

**Average operating current:** 230 µA direct poll; 255 µA group poll.

**EOL resistance:** not used.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% non-condensing.

**Dimensions:** 4.5" (114.3 mm) high x 4" (101.6 mm) wide x 1.25" (31.75 mm) deep. Mounts to a 4" (101.6 mm) square x 2.125" (53.975 mm) deep box.

**Accessories:** SMB500 Electrical Box; CB500 Barrier

### Agency Listings and Approvals

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S635
- **ULC:** S3705 (A version only)
- **FM Approved**
- **CSFM:** 7300-0028:0219
- **MEA:** 14-00-E
- **FDNY:** COA #6067, #6065

### Contact Ratings for FRM-1(A)

Current Rating	Maximum Voltage	Load Description	Application
3 A	30 VDC	Resistive	Non-Coded
2 A	30 VDC	Resistive	Coded
.9 A	110 VDC	Resistive	Non-Coded
.9 A	125 VDC	Resistive	Non-Coded
.5 A	30 VDC	Inductive (L/R=5ms)	Coded
1 A	30 VDC	Inductive (L/R=2ms)	Coded
.3 A	125 VAC	Inductive (PF=0.35)	Non-Coded
1.5 A	25 VAC	Inductive (PF=0.35)	Non-Coded
.7 A	70.7 VAC	Inductive (PF=0.35)	Non-Coded
2 A	25 VAC	Inductive (PF=0.35)	Non-Coded

**NOTE:** Maximum (Speakers): 70.7 V RMS, 50 W

### Product Line Information

**NOTE:** "A" suffix indicates ULC Listed model.

**FCM-1(A):** Intelligent Addressable Control Module.

**FRM-1(A):** Intelligent Addressable Relay Module.

**A2143-20:** Capacitor, required for Class A (Style Z) operation of speakers.

**SMB500:** Optional Surface-Mount Backbox.

**CB500:** Control Module Barrier — required by UL for separating power-limited and non-power limited wiring in the same junction box as FCM-1(A).

**NOTE:** For installation instructions, see the following documents:

- *FCM-1(A) Installation document I56-1169.*
- *FRM-1(A) Installation document I56-3502.*
- *Notifier SLC Wiring Manual, document 51253.*

Notifier® and FlashScan® are registered trademarks of Honeywell International Inc.

©2011 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S.A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.  
[www.notifier.com](http://www.notifier.com)



# NCM-W, NCM-F ONYX® Series Network Communications Modules

## General

The Network Communications Module (NCM) provides NOTIFIER Intelligent Fire Alarm Control Panels, and NCA and NCA-2 Network Control Annunciators with a means to connect to NOTI•FIRE•NET™. Two types of NCM are available: NCM-W for connecting nodes with twisted-pair wire, and NCM-F for connecting nodes with fiber-optic cable.

**NOTE:** Do not mix NCM and High Speed (HS) NCM on the same system.

## NCM-W Features

- Supports twisted-pair wire medium.
- NFPA Style 4 (Class B) operation or NFPA Style 7 (Class A) operation.
- Two programmable data thresholds.
- Transformer coupling provides electrical isolation between nodes.
- Pluggable terminal wiring with strain relief.
- Pluggable service connector (feeds signal directly through) in the event that power must be removed from a node.
- 312.5 Kbaud transmission rate.
- Data is regenerated at each node.
- Two network ports to allow simultaneous connection to fire alarm control panel and to programming computer.
- Enables software and database upload/download over NOTI•FIRE•NET™.
- Repeaters are available to increase signal.
- Repeaters may be utilized to switch media type.
- Up to 3,000 feet (914.4 m) between nodes in a point-to-point fashion (actual distance varies with wire quality).


**NCM-W Interconnections:** When wiring consecutive NCM-W boards, wiring may enter or exit at Port A or Port B. NCM-W port-to-port wiring is not polarity sensitive; use of Port A or Port B is arbitrary. An NCM-W may be connected to any of the following devices: MIB-W, MIB-WF, NAM-232W, NCM-W (in another panel), NCS-W network connection, RPT-W, RPT-WF.

**NCM-W Switch Functions:** The NCM-W provides two sets of switches to simplify network setup. Enable ground fault detection by setting “ON” switch SW103 (Channel A); switch SW101 (Channel B). Activate on-board end-of-line resistors by setting “ON” switch SW100 (Channel A); switch 102 (Channel B). NOTE: Correct configuration is dependent on network design; refer to the NOTI•FIRE•NET™ Network manual.

For further information and diagrams, refer to the NCM Installation Document, 51533.

## NCM-F Features

- Supports fiber-optic medium.
- NFPA Style 4 (Class B) or Style 7 (Class A) operation.
- Data is immune to all environmental noise.
- Optical isolation prevents ground loops.
- NOTI•FIRE•NET™ Network fiber-optic medium.
- Fiber type: 62.5/125 micrometers (multimode); or 50/125 micrometers (multimode).
- Maximum attenuation is 8 dB with 62.5/125 μm fiber and 4.2 dB with 50/125 μm fiber.
- Wavelength (1): 820 nanometers (use standard 850 nm fiber).
- Connectors: ST® style.

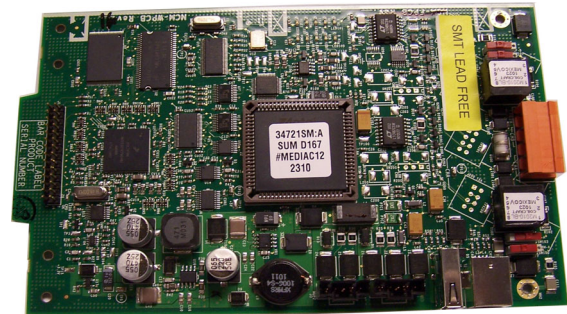

NCM-W

- 312.5 Kbaud transmission rate.
- Data is regenerated at each node.
- Two network ports to allow simultaneous connection to fire alarm control panel and to programming computer.
- Enables software and database upload/download over NOTI•FIRE•NET™.
- Repeaters are available to increase signal.
- Repeaters may be utilized to switch media type.

**NCM-F Interconnections:** When wiring consecutive nodes/repeaters, fiber cable must exit one board on Transmit (TX) and enter the next node/repeater on Receive (RX). The fiber-optic pair (RX, TX) from Port A of one node/repeater may be connected to either Port A or Port B of another node/repeater. An NCM-F may be connected to any of the following devices: MIB-F, MIB-WF, NAM-232F, another NCM-F, NCS-F network connection, RPT-F, RPT-WF.

## Common Specifications

**Temperature and humidity ranges:** This system meets NFPA requirements for operation at 0°C to 49°C (32°F to 120°F); and at a relative humidity (noncondensing) of 85% at 30°C (86°F) per NFPA, and 93% ± 2% at 32°C ± 2°C (89.6°F ± 1.1°F) per ULC. However, the useful life of the system’s standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and all peripherals be installed in an environment with a nominal room temperature of 15°C to 27°C (60°F to 80°F).

Power supply: 24 VDC @ 110 mA.

### MIXING WIRE AND FIBER ON THE SAME NETWORK

In some networks, it may be necessary to mix twisted-pair wire and fiber-optic cable. There are two solutions:

- In any network, an RPT-WF may be used as an interface between wire and fiber.

In a network that uses an AFP1010 or AM2020, a MIB-WF may be used as the interface between wire and fiber.

### MOUNTING

Both NCM-W and NCM-F can be installed in any standard chassis such as the CHS-4L, CHS-M2, CHS-M3 or CHS-4N (see panel sheets). Additionally, the NCM-W can be door-mounted on the ADP-4B dress panel on a single-space blank plate (BMP-1) for mounting in an CAB-4 Series cabinet.

## Agency Listings and Approvals

The following listings and approvals apply to the NCM. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL/ULC Listed: S635
- CSFM: 7165-0028:0224 (NFS2-3030), 7165-0028:0243 (NFS-320, NFS2-640)
- FM approved
- MEA approved
- FDNY: COA#6306, COA#6212

## Product Line Information

**NCM-W:** Network Communications Module, twisted-pair wire interface.

**NCM-F:** Network Communications Module, fiber-optic cable interface.

## Diagnostic LED Indicators

**A HI (green):** Illuminates to indicate the NCM-W Port A is set for high threshold (NCM-W only).

**B HI (green):** Illuminates to indicate the NCM-W Port B is set for high threshold (NCM-W only).

**RCD A (green):** Illuminates when the NCM is receiving data from NOTI•FIRE•NET™ on Port A.

**RCD B (green):** Illuminates when the NCM is receiving data from NOTI•FIRE•NET™ on Port B.

**STATA (yellow):** Illuminates when the NCM has not received valid data from NOTI•FIRE•NET™ on Port A for at least 16 seconds.

**STATB (yellow):** Illuminates when the NCM has not received valid data from NOTI•FIRE•NET™ on Port B for at least 16 seconds.


**RECON (yellow):** Illuminates when a reconfiguration on NOTI•FIRE•NET™ is in progress.

**PULSE (green):** Illuminates when the NCM is transmitting NOTI•FIRE•NET™ is in progress.


**RESET (yellow):** Illuminates when the microcontroller fails.

**POWER (green):** Illuminates when +5 VDC is available.

## NCM-W (detail)

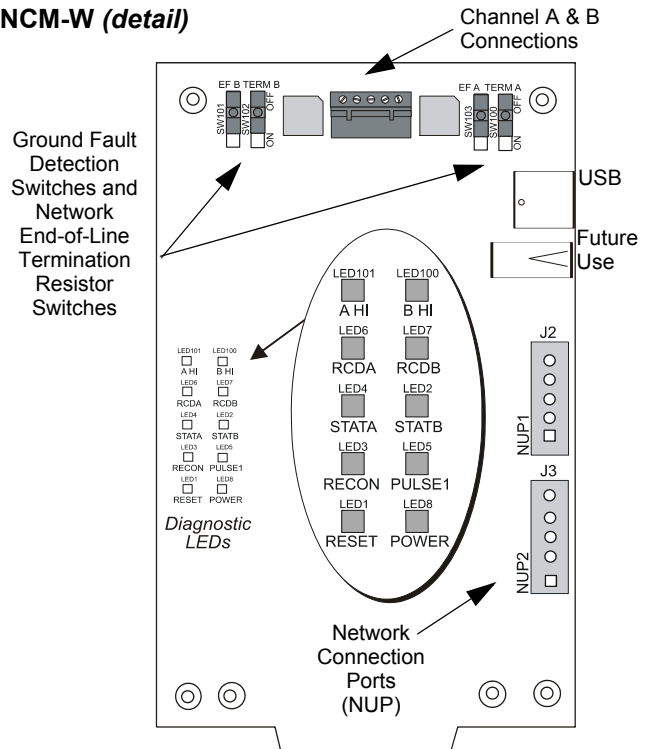

## NCM-F (detail)

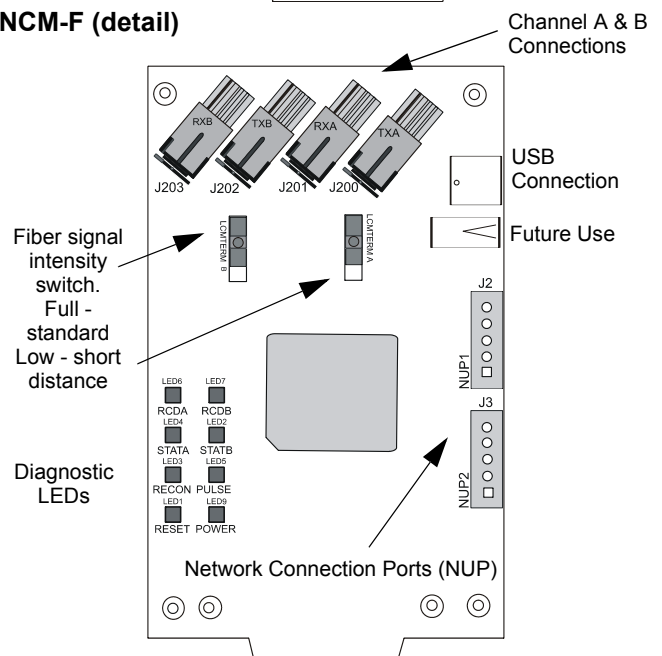

This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

## NOTIFIER

12 Clintonville Road  
Northford, CT 06472  
203.484.7161  
www.notifier.com

NOTI•FIRE•NET™ is a trademark of Honeywell International Inc. ONYX® and NOTIFIER® are registered trademarks of Honeywell International Inc. ST® is a registered trademark of AT&T.  
©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Country of Origin: USA



## FST-951 Series Intelligent Addressable Heat Detectors

The NOTIFIER<sup>®</sup> FST-951 Series intelligent thermal detectors are designed for both performance and aesthetics, and are direct replacements for the FST-851 Series. A new modern, sleek, contemporary design and advanced thermal technologies make the FST-951 Series ideal for both system operation and building design. The point ID address, set using rotary decimal switches, provide specific detector locations.

The series includes a 135°F/57°C fixed-temperature, rate-of-rise, and a 190°F/88°C fixed high-temperature detectors. These thermal detectors provide effective, intelligent property protection in a variety of applications. Detectors are available for both FlashScan<sup>®</sup> and CLIP applications as designated.

### Features

#### SLC LOOP:

- Two-wire SLC loop connection
- Unit uses base for wiring

#### ADDRESSING:

- Addressable by device
- Rotary, decimal addressing  
(Refer to the *NOTIFIER panel manuals* for device capacity.)

#### ARCHITECTURE:

- Designed to meet UL 268 7th Edition
- Sleek, low-profile, stylish design
- State-of-the-art thermistor technology for fast response
- Integral communications and built-in device-type identification
- Built-in tamper resistant feature
- Built-in functional test switch activated by external magnet

#### OPERATION:

- Fixed temperature model (FST-951) factory preset to 135°F (57°C)
- Rate-of-rise model (FST-951R), 15°F (8.3°C) per minute
- High-temperature model (FST-951H) factory preset to 190°F (88°C)
- 360°-field viewing angle of the two visual alarm indicators, LEDs blink red in Normal condition and turn on steady red in Alarm
- LEDs blink every time the unit is polled

#### MECHANICALS:

- Sealed against back pressure
- SEMS screws for wiring of the separate base
- Designed for direct-surface or electrical-box mounting
- Plugs into separate base for ease of installation and maintenance
- Separate base allows interchange of photoelectric, ionization and thermal sensors

#### OTHER SYSTEM FEATURES:

- Remote test feature from the panel
- Walk test with address display
- Low standby current

#### OPTIONS:

- Remote LED output connection to optional RA100Z remote LED annunciator



### Installation

FST-951 Series plug-in intelligent thermal detectors use a detachable base to simplify installation, service and maintenance. Installation instructions are shipped with each detector.

Mount detector base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see *DN-60054*.

**NOTE:** Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring only. When using relay or sounder bases, consult the ISO-X(A) installation sheet I56-1380 for device limitations between isolator modules and isolator bases.

### Applications

Use thermal detectors for protection of property. For further information, refer to I56-6522, Applications Manual for System Smoke Detectors, which provides detailed information on detector spacing, placement, zoning, wiring, and special applications.

### Construction

These detectors are constructed of fire-resistant plastic. The FST-951 Series plug-in intelligent thermal detectors are designed to commercial standards and offer an attractive appearance.

### Operation

Each FST-951 Series detector uses one of the panel's addresses (total limit is panel dependent) on the NOTIFIER Signaling Line Circuit (SLC). It responds to regular polls from the control panel and reports its type and the status. If it receives a test command from the panel (or a local magnet test), it stimulates its electronics and reports an alarm. It blinks its LEDs when polled and turns the LEDs on when commanded by the panel. The FST-951 Series offers features and performance that represent the latest in thermal detector technology.

## Product Line Information

**NOTE:** “-IV” suffix indicates CLIP and FlashScan device.

**FST-951:** White, low-profile intelligent 135°F fixed thermal sensor, FlashScan only

**FST-951A:** Same as FST-951 but with ULC listing

**FST-951-IV:** Ivory, low-profile intelligent 135°F fixed thermal sensor, FlashScan and CLIP

**FST-951A-IV:** Same as FST-951-IV but with ULC listing

**FST-951R:** White, low-profile intelligent rate-of-rise thermal sensor, FlashScan only

**FST-951RA:** Same as FST-951 but with ULC listing

**FST-951R-IV:** Ivory, low-profile intelligent rate-of-rise fixed thermal sensor, FlashScan and CLIP

**FST-951RA-IV:** Same as FST-951R-IV but with ULC listing

**FST-951H:** White, low-profile intelligent 190°F fixed thermal sensor, FlashScan only

**FST-951HA:** Same as FST-951H but with ULC listing

**FST-951H-IV:** Ivory, low-profile intelligent 190°F thermal sensor, FlashScan and CLIP

**FST-951HA-IV** Same as FST-951 but with ULC listing

### INTELLIGENT BASES

**NOTE:** For details on intelligent bases, see DN-60981.

**B300-6:** White, 6” base, standard flanged low-profile mounting base (CSFM: 7300-1653:0109)

**B300-6-IV:** Ivory, 6” base, standard flanged low-profile mounting base (CSFM: 7300-1653:0109)

**B300A-6:** Same as B300-6, ULC listed

**B300A-6-IV:** Ivory, 6” standard flanged low-profile mounting base, ULC listed

**B300-6-BP:** Bulk pack of B300-6, package contains 10

**B501-WHITE:** White, 4” standard European flangeless mounting base. UL/ULC listed (CSFM: 7300-1653:0109)

**B501-BL:** Black, 4” standard European flangeless mounting base. UL/ULC listed (CSFM: 7300-1653:0109)

**B501-IV:** Ivory color, 4” standard European flangeless mounting base. UL/ULC listed (CSFM: 7300-1653:0109)

**B501-WHITE-BP:** Bulk pack of B501-WHITE contains 10

**B224RB-WH:** White, relay base (CSFM: 7300-1653:0216)

**B224RB-IV:** Ivory, relay base (CSFM: 7300-1653:0216)

**B224RBA-WH:** White, relay base, ULC listing

**B224RBA-IV:** Ivory, relay base, ULC listing

**B224BI-WH:** White, isolator detector base (CSFM: 7300-1653:0216)

**B224BI-IV:** Ivory isolator detector base (CSFM: 7300-1653:0216)

**B224BIA-WH:** White, isolator detector base, ULC listing

**B224BIA-IV:** Ivory isolator detector base, ULC listing

**B200S-WH:** White, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213)

**B200S-IV:** Ivory, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213)

**B200SA-WH:** Same as B200S-WH, ULC listing

**B200SA-IV:** Same as B200S-IV, ULC listing

**B200SCOA-WH:** White, Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications)

**B200SCOA-IV:** Ivory Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications, ULC listing)

**B200S-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238)

**B200S-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238)

**B200SR-WH:** White, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213)

**B200SR-IV:** Ivory, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213)

**B200SRA-WH:** Same as B200SR-WH with, ULC listing

**B200SRA-IV:** Same as B200SR-IV in Ivory color, ULC listing

**B200SR-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238)

**B200SR-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238)

### MOUNTING KITS AND ACCESSORIES

**TR300:** White, replacement flange for B210LP(A) base

**TR300-IV:** Ivory, replacement flange for B210LP(A) base

**RA100Z(A):** Remote LED annunciator. 3-32 VDC. Mounts to a U.S. single-gang electrical box. For use with B501(A) and B300-6(A).

**M02-04-00:** Test magnet

**M02-09-00:** Test magnet with telescoping handle

**CK300:** Color Kit (includes cover and trim ring), white, 10-pack

**CK300-IV:** Color Kit (includes cover and trim ring), ivory, 10-pack

**CK300-BL:** Color Kit (includes cover and trim ring), black, 10-pack

## SPECIFICATIONS

---

**Sensitivity:** UL Applications: 0.5% to 4.0% per foot obscuration.  
ULC is 0.5% to 3.5%

**Size:** 2.0" (5.3 cm) high; base determines diameter

- **B300-6:** 6.1" (15.6 cm) diameter
- **B501:** 4" (10.2 cm) diameter

*For a complete list of detector bases see DN-60981*

**Shipping weight:** 3.4 oz. (95 g)

**Operating temperature range:**

- FST-951, FST-951R Series: –4°F to 100°F (–20°C to 38°C)
- FST-951H Series: –4°F to 150°F (–20°C to 66°C)

**Detector spacing:** UL approved for 50 ft. (15.24 m) center-to-center, FM approved for 25 x 25 ft. (7.62 x 7.62 m) spacing

**Relative humidity:** 10% – 93% non-condensing

**Thermal ratings:** fixed-temperature set point 135°F (57°C), rate-of-rise detection 15°F (8.3°C) per minute, high temperature heat 190°F (88°C)

**Mounting:** B300-6(A) flanged base, included

See “**Product Line Information: Intelligent Bases,**” if using a different base.

### **ELECTRICAL SPECIFICATIONS**

**Voltage range:** 15 - 32 volts DC peak

**Standby current (max. avg.):** 200µA @ 24 VDC (one communication every 5 seconds with LED enabled)

**Max current:** 4.5 mA @ 24 VDC (“ON”)

### **Listings and Approvals**

Listings and approvals below apply to the FST-951 Series detectors. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL/ULC Listing: S747
- FM Approved
- CSFM: 7270-0028:0502



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

FlashScan® and NOTIFIER® are registered trademarks of Honeywell International, Inc.

©2019 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Country of Origin: Mexico

### **NOTIFIER**

12 Clintonville Road  
Northford, CT 06472  
203.484.7161  
www.notifier.com



# FSP-951 Series Addressable Photoelectric Smoke Detectors

The NOTIFIER® FSP-951 Series intelligent plug-in smoke detectors are designed for both performance and aesthetics, and are direct replacements for the FSP-851 Series. A new modern, sleek, contemporary design and enhanced optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources in accordance with more stringent code standards.

The FSP-951 Series detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for selective maintenance when chamber contamination reaches an unacceptable level. Dual electronic thermistors add 135°F (57°C) fixed temperature thermal sensing on the FSP-951T. The FSP-951R is a remote test capable detector for use with DNR Series duct detector housings. FSP-951 series detectors are available for both FlashScan® and CLIP applications as designated.

## Features

### SLC LOOP:

- Two-wire SLC loop connection
- Unit uses base for wiring
- Compatible with FlashScan® and CLIP protocol systems
- Stable communication technique with noise immunity

### ADDRESSING:

- Addressable by device
- Rotary, decimal addressing  
(Refer to the *NOTIFIER panel manuals* for device capacity.)

### ARCHITECTURE:

- Sleek, low-profile, stylish design
- Unique single-source design to respond quickly and dependably to a broad range of fires
- Integral communications and built-in device-type identification
- Built-in tamper resistant feature
- Remote test feature from the panel
- Walk test with address display (an address on 121 will blink the detector LED: 12-[pause]-1 (*FlashScan systems only*))
- Built-in functional test switch activated by external magnet
- Removable cover and insect-resistant screen for simple field cleaning
- Expanded color options

### OPERATION:

- Designed to meet UL 268 7th Edition
- Factory preset at 1.5% nominal sensitivity for panel alarm threshold level
- LED “blinks” when the unit is polled (communicating with the fire panel) and latches in alarm.
- Low standby current

### MECHANICALS:

- Sealed against back pressure
- SEMS screws for wiring of the separate base
- Designed for direct-surface or electrical-box mounting
- Plugs into separate base for ease of installation and maintenance



- Separate base allows interchange of photoelectric, ionization and thermal sensors

### OPTIONS:

- Optional relay, isolator, and sounder bases

## Installation

FSP-951 Series plug-in intelligent smoke detectors use a detachable base to simplify installation, service and maintenance. Installation instructions are shipped with each detector.

Mount detector base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see *DN-60054*.

**NOTE:** Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring “T-taps” or branches are permitted for Class “B” wiring only.

When using relay or sounder bases, consult the *ISO-X(A)* installation sheet 156-1380 for device limitations between isolator modules and isolator bases.

## Construction

These detectors are constructed of fire-resistant plastic. The FSP-951 Series plug-in intelligent smoke detectors are designed to commercial standards and offer an attractive appearance.

## Operation

Each FSP-951 Series detector uses one of the panel's addresses (total limit is panel dependent) on the NOTIFIER Signaling Line Circuit (SLC). It responds to regular polls from the control panel and reports its type and the status. If it receives a test command from the panel (or a local magnet test), it stimulates its electronics and reports an alarm. It blinks its LEDs when polled and turns the LEDs on when commanded by the panel. The FSP-951 Series offers features and performance that represent the latest in smoke detector technology.

## Product Line Information

**NOTE:** “-IV” suffix indicates CLIP and FlashScan device.

**FSP-951:** White, low-profile intelligent photoelectric sensor, FlashScan only

**FSP-951A:** Same as FSP-951 but with ULC listing

**FSP-951-IV:** Ivory, low-profile intelligent photoelectric sensor

**FSP-951A-IV:** Same as FSP-951-IV but with ULC listing

**FSP-951T:** White, same as FSP-951 but includes a built-in 135°F (57°C) fixed-temperature thermal device, FlashScan only

**FSP-951TA:** Same as FSP-951T but with ULC listing

**FSP-951T-IV:** Ivory, same as FSP-951T but includes a built-in 135°F (57°C) fixed-temperature thermal device

**FSP-951TA-IV:** Same as FSP-951T-IV but with ULC listing

**FSP-951R:** White, low-profile intelligent photoelectric sensor, remote test capable, for use with DNR/DNRW, FlashScan only

**FSP-951RA:** Same as FSP-951R but with ULC listing, for use with DNRA

**FSP-951R-IV:** Ivory, low-profile intelligent photoelectric sensor, remote test capable, for use with DNR/DNRW

**FSP-951RA-IV:** Same as FSP-951R-IV but with ULC listing, for use with DNRA

## **INTELLIGENT BASES**

**NOTE:** For details on intelligent bases, see DN-60981.

**B300-6:** White, 6" base, standard flanged low-profile mounting base (CSFM: 7300-1653:0109)

**B300-6-IV:** Ivory, 6" base, standard flanged low-profile mounting base (CSFM: 7300-1653:0109)

**B300A-6:** Same as B300-6, ULC listed

**B300A-6-IV:** Ivory, 6" standard flanged low-profile mounting base, ULC listed

**B300-6-BP:** Bulk pack of B300-6, package contains 10

**B501-WHITE:** White, 4" standard European flangeless mounting base. UL/ULC listed (CSFM: 7300-1653:0109)

**B501-BL:** Black, 4" standard European flangeless mounting base. UL/ULC listed (CSFM: 7300-1653:0109)

**B501-IV:** Ivory color, 4" standard European flangeless mounting base. UL/ULC listed (CSFM: 7300-1653:0109)

**B501-WHITE-BP:** Bulk pack of B501-WHITE contains 10

**B224RB-WH:** White, relay base (CSFM: 7300-1653:0216)

**B224RB-IV:** Ivory, relay base (CSFM: 7300-1653:0216)

**B224RBA-WH:** White, relay base, ULC listing

**B224RBA-IV:** Ivory, relay base, ULC listing

**B224BI-WH:** White, isolator detector base (CSFM: 7300-1653:0216)

**B224BI-IV:** Ivory isolator detector base (CSFM: 7300-1653:0216)

**B224BIA-WH:** White, isolator detector base, ULC listing

**B224BIA-IV:** Ivory isolator detector base, ULC listing

**B200S-WH:** White, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213)

**B200S-IV:** Ivory, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213)

**B200SA-WH:** Same as B200S-WH, ULC listing

**B200SA-IV:** Same as B200S-IV, ULC listing

**B200SCOA-WH:** White, Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications)

**B200SCOA-IV:** Ivory Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications, ULC listing)

**B200S-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238)

**B200S-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238)

**B200SR-WH:** White, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213)

**B200SR-IV:** Ivory, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213)

**B200SRA-WH:** Same as B200SR-WH with, ULC listing

**B200SRA-IV:** Same as B200SR-IV in Ivory color, ULC listing

**B200SR-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238)

**B200SR-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238)

## **MOUNTING KITS AND ACCESSORIES**

**TR300:** White, replacement flange for B210LP(A) base

**TR300-IV:** Ivory, replacement flange for B210LP(A) base

**RA100Z(A):** Remote LED annunciator. 3-32 VDC. Mounts to a U.S. single-gang electrical box. For use with B501(A) and B300-6(A).

**M02-04-00:** Test magnet

**M02-09-00:** Test magnet with telescoping handle

**CK300:** Color Kit (includes cover and trim ring), white, 10-pack

**CK300-IV:** Color Kit (includes cover and trim ring), ivory, 10-pack

**CK300-BL:** Color Kit (includes cover and trim ring), black, 10-pack

## SPECIFICATIONS

---

### Sensitivity:

- UL Applications: 0.5% to 4.0% per foot obscuration.
- ULC Applications: 0.5% to 3.5% per foot obscuration

**Size:** 2.0" (51mm) high; base determines diameter

- **B300-6 series:** 6.1" (15.6 cm) diameter
- **B501 series:** 4" (10.2 cm) diameter

*For a complete list of detector bases see DN-60981*

**Shipping weight:** 3.4 oz. (95 g)

### Operating temperature range:

- FSP-951 Series: 32°F to 122°F (0°C to 50°C)
- FSP-951T Series: 32°F to 100°F (0°C to 38°C)
- FSP-951R Series installed in DNR/DNRA/DNRW, -4°F to 158°F (-20°C to 70°C)

**UL/ULC Listed Velocity Range:** 0-4000 ft/min. (1219.2 m/min.), suitable for installation in ducts

**Relative humidity:** 10% – 93% non-condensing

**Thermal ratings:** fixed-temperature set point 135°F (57°C), rate-of-rise detection 15°F (8.3°C) per minute, high temperature heat 190°F (88°C)

### ELECTRICAL SPECIFICATIONS

**Voltage range:** 15 - 32 volts DC peak

**Standby current (max. avg.):** 200µA @ 24 VDC (one communication every 5 seconds with LED enabled)

**Max current:** 4.5 mA @ 24 VDC ("ON")

### DETECTOR SPACING AND APPLICATIONS

NOTIFIER recommends spacing detectors in compliance with NFPA 72. In low airflow applications with smooth ceiling, space detectors 30 feet (9.1m). For specific information regarding detector spacing, placement, and special applications refer to NFPA 72. A *System Smoke Detector Application Guide*, document SPAG91, is available at [www.systemsensor.com](http://www.systemsensor.com).

### Listings and Approvals

Listings and approvals below apply to the FSP-951 Series detectors. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL/ULC Listing: S1115
- FM Approved
- CSFM: 7272-0028:0503



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

FlashScan®, NOTIFIER®, and System Sensor® are registered trademarks of Honeywell International, Inc.

©2020 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Country of Origin: Mexico

### NOTIFIER

12 Clintonville Road  
Northford, CT 06472  
203.484.7161  
[www.notifier.com](http://www.notifier.com)

